



This is a digital copy of a book that was preserved for generations on library shelves before it was carefully scanned by Google as part of a project to make the world's books discoverable online.

It has survived long enough for the copyright to expire and the book to enter the public domain. A public domain book is one that was never subject to copyright or whose legal copyright term has expired. Whether a book is in the public domain may vary country to country. Public domain books are our gateways to the past, representing a wealth of history, culture and knowledge that's often difficult to discover.

Marks, notations and other marginalia present in the original volume will appear in this file - a reminder of this book's long journey from the publisher to a library and finally to you.

Usage guidelines

Google is proud to partner with libraries to digitize public domain materials and make them widely accessible. Public domain books belong to the public and we are merely their custodians. Nevertheless, this work is expensive, so in order to keep providing this resource, we have taken steps to prevent abuse by commercial parties, including placing technical restrictions on automated querying.

We also ask that you:

- + *Make non-commercial use of the files* We designed Google Book Search for use by individuals, and we request that you use these files for personal, non-commercial purposes.
- + *Refrain from automated querying* Do not send automated queries of any sort to Google's system: If you are conducting research on machine translation, optical character recognition or other areas where access to a large amount of text is helpful, please contact us. We encourage the use of public domain materials for these purposes and may be able to help.
- + *Maintain attribution* The Google "watermark" you see on each file is essential for informing people about this project and helping them find additional materials through Google Book Search. Please do not remove it.
- + *Keep it legal* Whatever your use, remember that you are responsible for ensuring that what you are doing is legal. Do not assume that just because we believe a book is in the public domain for users in the United States, that the work is also in the public domain for users in other countries. Whether a book is still in copyright varies from country to country, and we can't offer guidance on whether any specific use of any specific book is allowed. Please do not assume that a book's appearance in Google Book Search means it can be used in any manner anywhere in the world. Copyright infringement liability can be quite severe.


About Google Book Search

Google's mission is to organize the world's information and to make it universally accessible and useful. Google Book Search helps readers discover the world's books while helping authors and publishers reach new audiences. You can search through the full text of this book on the web at <http://books.google.com/>


Library
of the
University of Wisconsin







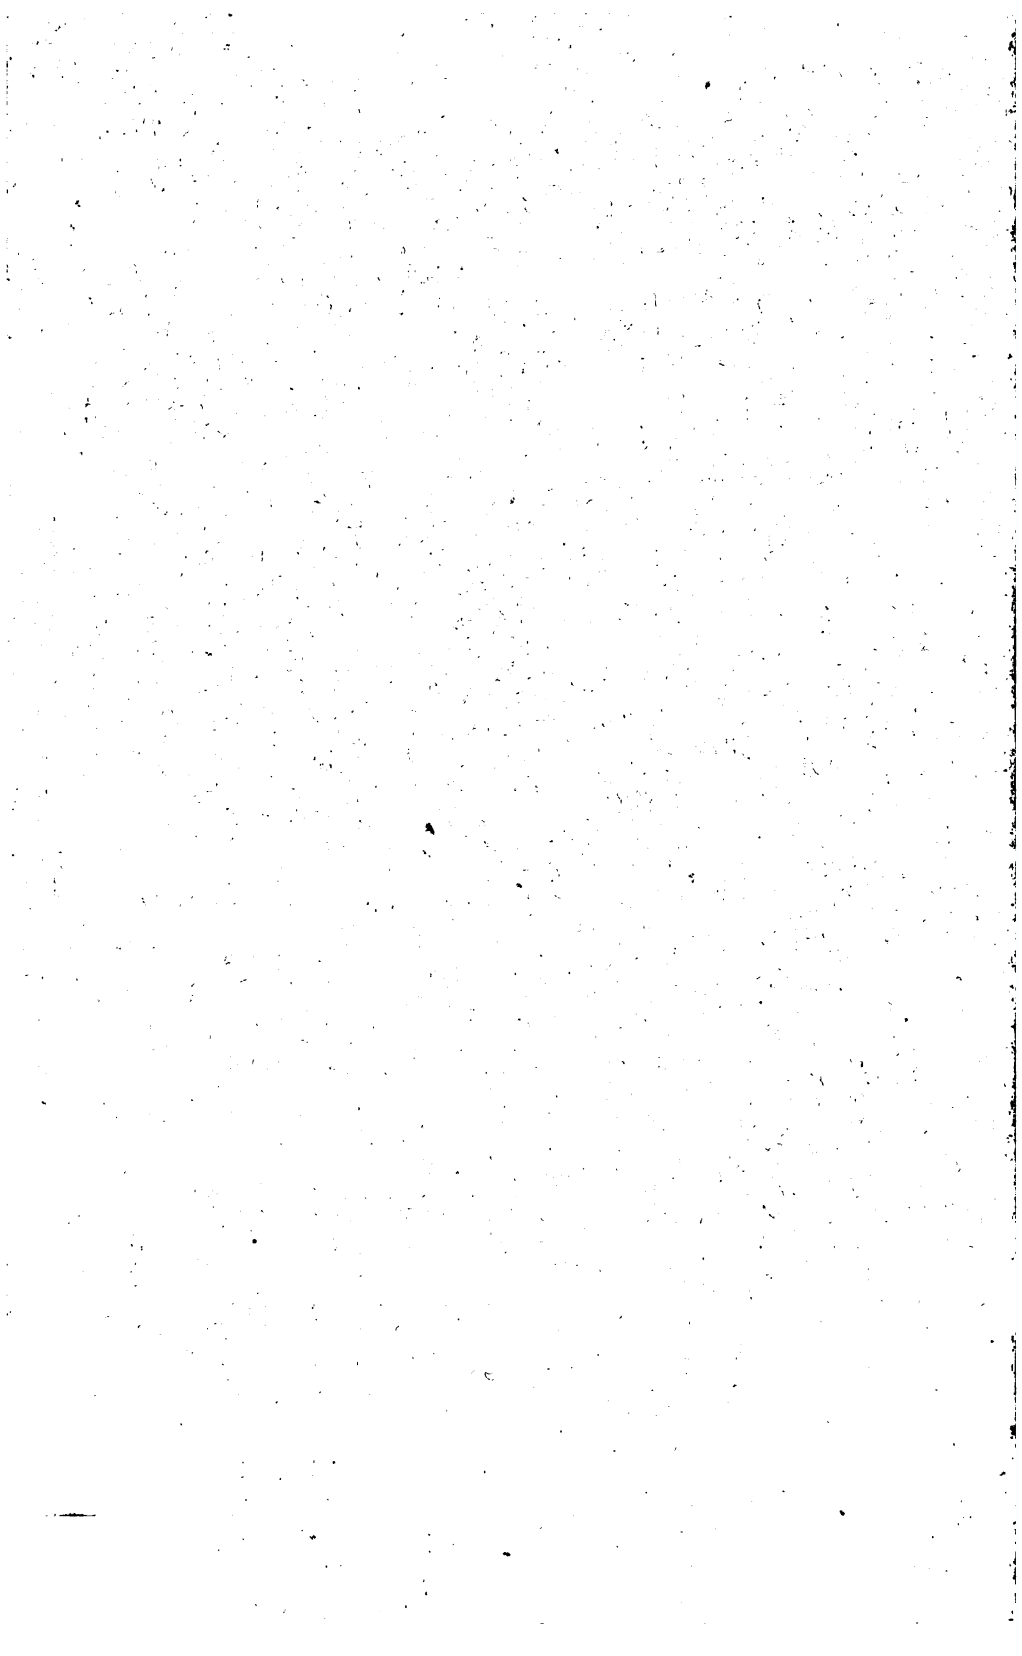



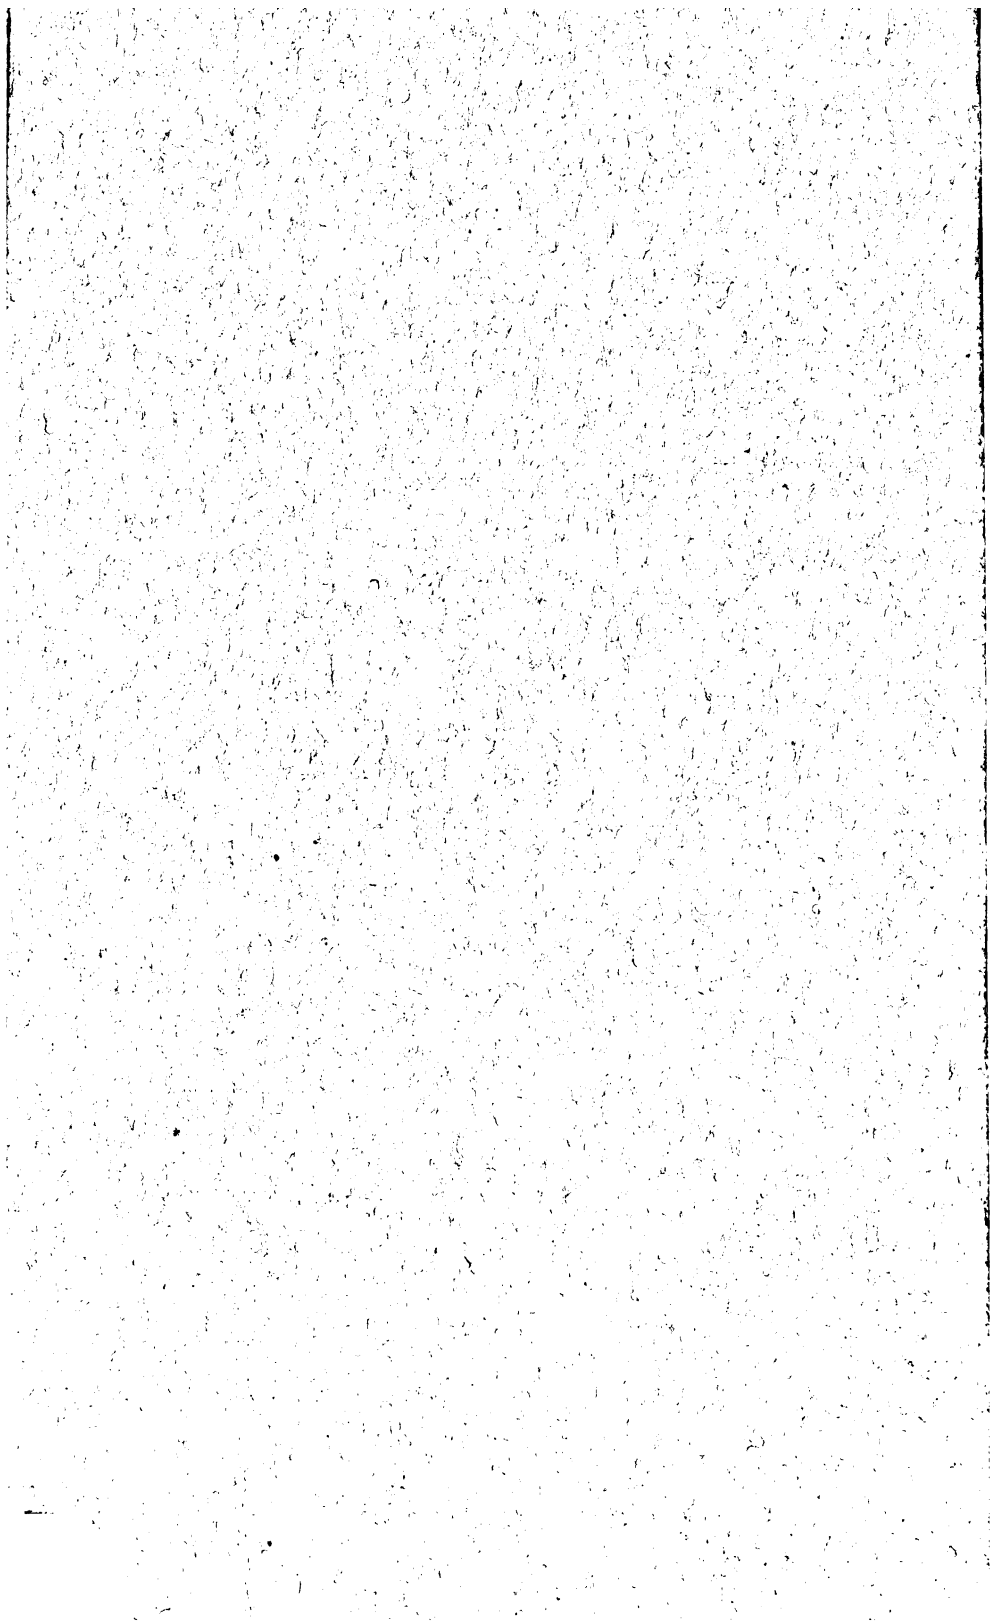





A TEXT-BOOK
ON
ROOFS AND BRIDGES.

PART II.
GRAPHIC STATICS.

BY
MANSFIELD MERRIMAN,
PROFESSOR OF CIVIL ENGINEERING IN LEHIGH UNIVERSITY,
AND
HENRY S. JACOBY,
ASSOCIATE PROFESSOR OF CIVIL ENGINEERING IN CORNELL UNIVERSITY.

THIRD EDITION, ENLARGED.
FIRST THOUSAND.

NEW YORK:
JOHN WILEY & SONS.
LONDON: CHAPMAN & HALL, LIMITED.
1897.

COPYRIGHT, 1890,
By MANSFIELD MERRIMAN
AND
HENRY S. JACOBY.

COPYRIGHT, 1897,
By MANSFIELD MERRIMAN
AND
HENRY S. JACOBY.

56522

6273284

JAN 15 1901

SP

M553

2

2

PREFACE.

The course of instruction in roofs and bridges given to students of civil engineering in Lehigh University consists of four parts; first, the computation of stresses in roof trusses and in all the common styles of simple bridge trusses; second, the analysis of stresses by graphic methods; third, the design of a bridge, which includes the proportioning of details and the preparation of working drawings; and fourth, the discussion of cantilever, suspension, continuous and arched bridges. In the following pages the second part of this course is presented, together with additional matter so as to form a tolerably complete treatise on Graphic Statics as applied to the discussion of common roofs and bridges.

In an elementary text-book of this kind it is not expected that much will be found that is new except method of arrangement and presentation. Attention is called, however, to the abbreviated processes employed in some of the diagrams for wind stresses, to the determination of stresses due to initial tension, and to portions of the analysis of maximum moments and shears under locomotive wheel loads as possessing points of novelty and practical value. These new features are due to the experienced Instructor whose name appears on the title page in connection with my own; the larger portion of the text has also been written by him, and the cuts and plates are his work.

The universal approbation expressed concerning the utility of the blank leaves in Part I leads me to insert them in this volume also. On these pages students may record in permanent form the numerical computations which are always requisite preparatory to graphical analysis, and also make free hand sketches of some of the stress diagrams required in the problems. But I regard it as essential that a few well chosen cases shall be thoroughly and completely worked out as indicated on the plates, which show the manner in which for many years I have required students to finish drawings in Graphic Statics. Here, as in Part I, the minimum as well as the maximum stresses are determined for most of the examples, and all varieties of loading are treated so that students may be able to work in accordance with all kinds of specifications.

MANSFIELD MERRIMAN.

LEHIGH UNIVERSITY, BETHLEHEM, PA.,

December 18, 1889.

NOTE TO THE THIRD EDITION.

THIS edition of Part II is revised on the same plan as the fourth edition of Part I, the blank leaves being omitted, while the text is enlarged to nearly double the former length. Portions of Chapters II and III have been rewritten, while Chapters V, VI, and VII are new, and give many improved methods of graphical analysis.

March 1, 1897.

CONTENTS.

CHAPTER I.

PRINCIPLES AND METHODS.

	PAGE
ART. 1. THE FORCE TRIANGLE,	1
2. THE FORCE POLYGON,	4
3. CONDITIONS OF EQUILIBRIUM,	7
4. STRESSES IN A CRANE TRUSS,	9
5. STRESSES IN A POLYGONAL FRAME,	11
6. THE EQUILIBRIUM POLYGON,	12
7. PROPERTIES OF THE EQUILIBRIUM POLYGON,	15
8. REACTIONS OF BEAMS,	18
9. SIMPLE BEAMS UNDER CONCENTRATED LOADS,	20
10. SIMPLE BEAMS UNDER UNIFORM LOADS,	22
11. OVERHANGING BEAMS,	24
12. CENTER OF GRAVITY OF CROSS-SECTIONS,	27
13. MOMENT OF INERTIA OF CROSS-SECTIONS,	28
14. GRAPHICAL ARITHMETIC,	30

CHAPTER II.

ROOF TRUSSES.

ART. 15. DEFINITIONS AND PRINCIPLES,	33
16. DEAD AND SNOW LOADS,	34

	PAGE
17. STRESSES DUE TO DEAD AND SNOW LOADS,	38
18. A TRIANGULAR ROOF TRUSS,	44
19. WIND LOADS,	46
20. A TRUSS WITH FIXED ENDS,	48
21. A TRUSS WITH ONE END FREE,	50
22. ABBREVIATED METHODS FOR WIND STRESS,	54
23. COMPLETE STRESSES FOR A TRIANGULAR TRUSS,	57
24. COMPLETE STRESSES FOR A CRESCENT TRUSS,	59
25. AMBIGUOUS CASES,	61
26. UNSYMMETRICAL LOADS AND TRUSSES,	63

CHAPTER III.

BRIDGE TRUSSES.

ART. 27. LOADS ON BRIDGE TRUSSES,	67
28. DEAD LOAD STRESSES,	69
29. LIVE LOAD STRESSES IN A WARREN TRUSS,	73
30. LIVE LOAD STRESSES IN A PRATT TRUSS,	77
31. SNOW LOAD STRESSES,	83
32. WIND STRESSES,	84
33. STRESSES DUE TO INITIAL TENSION,	87
34. FINAL MAXIMUM AND MINIMUM STRESSES,	89
35. THE BOWSTRING TRUSS,	91
36. THE PARABOLIC BOWSTRING TRUSS,	99
37. APPLICATION OF THE EQUILIBRIUM POLYGON,	102
38. EXCESS LOADS,	107

CHAPTER IV.

LOCOMOTIVE WHEEL LOADS.

39. STANDARD TYPICAL LOADS,	112
40. ANALYSIS OF A PLATE GIRDER,	114

CONTENTS.

vii

	PAGE
ART. 41. ANALYSIS OF A FRATT TRUSS,	119
42. MOMENTS IN PLATE GIRDERS,	124
43. SHEARS IN PLATE GIRDERS,	131
44. SIMULTANEOUS MOMENTS,	135
45. SHEARS IN TRUSSES,	136
46. FLOOR-BEAM REACTIONS,	139
47. MOMENTS IN TRUSSES,	141

CHAPTER V.

TRUSSES WITH BROKEN CHORDS.

ART. 48. POINTS OF DIVISION IN PANELS,	144
49. POSITION OF WHEEL LOADS,	147
50. RESOLUTION OF THE SHEAR,	150
51. EXAMPLE.—MAXIMUM CHORD STRESSES,	153
52. EXAMPLE.—MAXIMUM STRESSES IN DIAGONALS,	157
53. EXAMPLE.—MAXIMUM STRESSES IN VERTICALS,	160
54. EXAMPLE.—MINIMUM STRESSES IN VERTICALS,	162
55. STRESSES DUE TO WIND,	171

CHAPTER VI.

MISCELLANEOUS TRUSSES.

ART. 56. THE PEGRAM TRUSS,	175
57. THE PETIT TRUSS,	182
58. THE BALTIMORE TRUSS,	187
59. UNSYMMETRICAL TRUSSES,	187
60. DOUBLE AND QUADRUPLE SYSTEMS,	192
61. THE GREINER TRUSS,	196
62. HORIZONTAL SHEAR IN A BEAM,	198
63. ROOF TRUSS WITH COUNTERBRACES,	203
64. A FERRIS WHEEL WITH TENSILE SPOKES,	208
65. A BICYCLE WHEEL WITH TENSILE SPOKES,	211

CHAPTER VII.

ELASTIC DEFORMATION OF TRUSSES.

	PAGE
ART. 66. THE DISPLACEMENT DIAGRAM,	214
67. DEFORMATION OF A TRUSS,	216
68. DEFLECTION OF A TRUSS,	221
69. TRUSS DEFLECTION UNDER LOCOMOTIVE WHEEL LOADS,	222

APPENDIX.

ANSWERS TO PROBLEMS,	227
INDEX,	231

PLATES.

	TO FACE PAGE
I. TRIANGULAR ROOF TRUSS,	58
II. CRESCENT ROOF TRUSS,	60
III. PLATE GIRDER UNDER LOCOMOTIVE AND TRAIN LOADS,	118
IV. PRATT TRUSS UNDER LOCOMOTIVE AND TRAIN LOADS,	122
V. TRUSS WITH CURVED UPPER CHORD,	174
VI. PEGRAM TRUSS,	182

GRAPHIC STATICS.

CHAPTER I.

PRINCIPLES AND METHODS.

ART. 1. THE FORCE TRIANGLE.

A force is determined when its magnitude, direction, and line of action are known, and accordingly it may be graphically represented by the length, direction, and position of a straight line. Forces are given in pounds, tons, or kilograms, while the lengths of lines are measured in inches or centimeters. If the scale of force be 4 tons to an inch, a line 1.32 inches long will represent a force of 5.28 tons; thus the magnitude of forces will be directly measured by means of the scales used in draughting.

The resultant of two or more forces is a single force which produces the same effect as the forces themselves, and may therefore replace them. Let two forces P_1 and P_2 , which act in the same plane upon the point m be represented in magnitude and position by the lines mn and mp , and in direction by the arrows. Let the parallelogram be completed by drawing a line through n parallel to P_2 , and a line through p parallel to P_1 , and then let m be joined with their point of intersection. This line, designated by R , represents the resultant of the two




Fig. 1.

given forces. To find the magnitude of this resultant by the analytic method, let θ be the angle included between P_1 and P_2 ; then from either of the triangles composing the figure a well known theorem of geometry gives

$$R^2 = P_1^2 + P_2^2 + 2P_1P_2 \cos \theta.$$

For instance, if $P_1 = 30$ pounds, $P_2 = 50$ pounds, and $\theta = 75$ degrees, there is found by computation $R = 64.6$ pounds.

The graphic method of finding the resultant consists of the following operations: On a sheet of paper, with the help of a ruler and protractor, from a point m two indefinite lines are drawn, making an angle of 75 degrees with each other. Using a suitable scale, say of 40 pounds to the inch, the distance mn is laid off equal to 30 pounds and mp equal to 50 pounds. With a ruler and triangle the parallelogram is completed, and m joined with the opposite vertex. This line is now measured by the scale, and the value of the resultant is found.

It will be seen that it is not necessary to construct the entire parallelogram, since the triangles on the opposite sides of the diagonal are equal. The triangle above the diagonal can be constructed by drawing a line through n parallel to P_2 , laying off upon it the value of P_1 , and then joining its end to m ; similarly the lower triangle can be independently drawn. Either of these triangles is called the force triangle.

Usually the lines of action of the given forces form part of a diagram upon which it is not desirable to construct the force triangle. In this case let any suitable point a be selected, and ab be drawn parallel and equal to P_1 ; then through b let bc be drawn parallel and equal to P_2 , and let a be joined with c . The line ac represents the magnitude of the resultant R , and is measured by the same scale as that used in laying off ab and bc . The angles bac and bca may be measured by the protractor, and these are the angles which R makes with P_1 and P_2 . The

direction in which the resultant acts is indicated by the arrow upon ac , and this is seen to be opposed to the directions of those upon ab and bc in following around the triangle. Finally, the line of action of the resultant R must pass through m , the point of application of the given forces P_1 and P_2 . Hence, after constructing the force triangle abc , the resultant R is found in magnitude, direction, and line of action by drawing through m a line equal and parallel to ac .

The above operation is termed composition of forces, P_1 and P_2 , having been combined into one. The reverse process of decomposition or resolution of forces may also be effected by the force triangle. For instance, let R , in Fig. 1 be given, and let it be required to find its components in the directions of mn and mp . Let ac be drawn equal and parallel to R , and through its extremities let ab and cb be drawn parallel to the given directions; these lines intersect in b , and when they are measured by the scale the magnitude of the components will be known. The directions of ab and bc are opposite to that of ac in following around the triangle. Lastly, through m , the point of application of R , let P_1 and P_2 be laid off upon the given directions, equal to ab and bc , and the lines of action of the components are determined.

A number of forces are said to be in equilibrium when no tendency to motion is produced in the body upon which they act. In Fig. 1 suppose a force, P_3 , equal and opposite to R , to be applied at m ; then this force together with P_1 and P_2 will be in equilibrium, for the last two may be replaced by their resultant R , which by the conditions specified holds P_3 in equilibrium. The corresponding force triangle will be abc with the direction of ac reversed, so that all the forces around the triangle have the same direction; hence, when three forces are in equilibrium, they form a closed force triangle.

When three forces whose lines of action lie in a plane and

intersect in one point are in equilibrium, any one may be determined when two are given. In Fig. 2 let P_1 and P_2 be given




Fig. 2.

to find P_3 . Let ab be laid off equal and parallel to P_1 , and from b let bc be drawn equal and parallel to P_2 ; then ca , the closing side of the triangle, represents P_3 in magnitude and direction. As its line of action must also pass through m , the force P_3 is drawn equal and parallel to ca ,

and in the same direction, thus completing the solution.

Should only one force be given, together with the lines of action of the other two, their magnitudes and directions may be found. Let P_1 and the lines of action of P_2 and P_3 be given. Draw ab parallel to P_1 , mark off its length according to scale, and through its extremities draw lines parallel to P_2 and P_3 ; these lines intersect in c , and the length of bc gives the magnitude of P_2 , its direction being from b to c , while ca represents P_3 in the same respects.

The force triangle is the foundation of the science of graphic statics. By it all problems relating to the composition and resolution of forces can be solved, when the forces are but three in number and act in the same plane upon a common point.

Problem 1. Find the magnitude of the resultant of two forces making an angle of 60 degrees with each other, one being 25 pounds and the other 40 pounds.

Prob. 2. The lines of action of two forces, of 50 and 30 pounds respectively, make an angle of 120 degrees. What is the magnitude of the force that holds them in equilibrium and the angles that it makes with each of them?

ART. 2. THE FORCE POLYGON.

When it is required to find the resultant of a number of forces acting in the same plane and having a common point of

application, the resultant of two of the forces may be found by Art. 1, a third force may then be united with it to obtain a second resultant, and this

operation continued until all the forces are combined. In Fig. 3, the line R_1 is the resultant of P_1 and P_2 , the




Fig. 3.

line R_2 is the resultant of R_1 and P_3 , and R is the resultant of R_2 and P_4 , and therefore of the given forces P_1 , P_2 , P_3 , and P_4 . It is, however, not necessary to construct these resultants in order to find R , if the dotted lines be drawn parallel and equal to P_2 , P_3 , and P_4 .

The polygon shown by broken lines is called the force polygon; the resultant R forms its closing side, and each of the other sides represents one of the given forces. The diagram $abcde$ shows the polygon as it is generally drawn with the diagonals omitted. The direction of the resultant is opposed to the direction of all the given forces in following around the sides of the polygon; thus the arrow on ae has the reverse direction of the other arrows.

The force polygon may therefore be constructed as follows:

Draw in succession lines parallel and equal to the given forces, each line beginning where the preceding one ends, and extending in the same direction as the force it represents. The line joining the initial to the final point represents the resultant in direction and magnitude.

To produce equilibrium with P_1 , P_2 , P_3 , and P_4 , a force equal and opposite to R must be applied at m . This added force in the force polygon is equal to ea with its former direction reversed, and the distance from the initial to the final point in the construction of the polygon becomes zero.

Hence, if a number of forces lying in the same plane and

having a common point of application are in equilibrium, they will form a closed force polygon, and in passing around it all the forces will have the same direction.

In either of the above cases it makes no difference in what order the forces are arranged in the force polygon. Thus in Fig. 3 the sides of the force polygon are drawn in the order P_1, P_2, P_3, P_4, R ; but the same value of R , both in intensity and direction, will be obtained if they are drawn in any other order, as, for example, P_3, P_1, P_4, P_2, R . Again, in Fig. 4, let the four

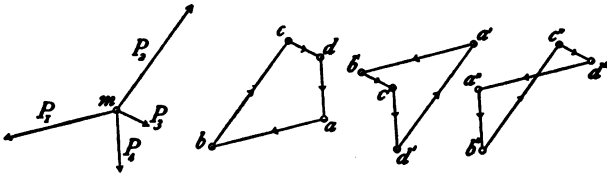


Fig. 4.

forces which meet at m be in equilibrium; then taking them in the order P_1, P_2, P_3, P_4 the force polygon $abcd$ is drawn, in the order P_1, P_3, P_4, P_2 the polygon $a'b'c'd'$ results, and in the order P_4, P_3, P_2, P_1 the polygon $a''b''c''d''$ is found, each of which graphically represents the given forces. In the last case it is seen that two of the lines in the force polygon cross each other; this is of frequent occurrence in practical problems.

The force triangle (Art. 1) is but a particular case of the force polygon, namely, when the forces are but three in number. The word polygon is hence often used in a general sense as including that of the triangle. From three forces in equilibrium two force triangles may be drawn; from four forces in equilibrium six force polygons can be formed.

Prob. 3. Draw a force polygon for five forces in equilibrium, and prove that any diagonal of the polygon is the resultant of the forces on one side and holds in equilibrium those on the other.

Prob. 4. Let $P_1 = 100$ pounds, $P_2 = 175$ pounds, and $P_3 = 60$ pounds, and let the angles which they make with each other be $P_1mP_2 = 135^\circ$, $P_2mP_3 = 87^\circ$, $P_3mP_1 = 138^\circ$. Draw three force polygons and determine from each the value of the resultant, and the angle that it makes with P_1 .

ART. 3. CONDITIONS OF EQUILIBRIUM.

When several forces lie in the same plane the necessary and sufficient conditions of static equilibrium are that there shall be no tendency to motion, either of translation or rotation. Analytically this is expressed by saying that the algebraic sum of the components, both horizontal and vertical, of the forces must be zero, and that the algebraic sum of the moments of the forces must also be zero.

When the given forces have a common point of application, the graphic condition for equilibrium is that the force polygon must close. For, if it does not close the line joining the initial with the final point represents the resultant of the given forces (Art. 2), and this resultant will cause motion; and if it does close there exists no resultant. Therefore, if the given forces which meet at a common point are in equilibrium the force polygon must close; and conversely, if the force polygon closes the given forces must be in equilibrium.

When several forces lying in the same plane have different points of application, so that their lines of action do not intersect in the same point, and are in equilibrium the force polygon must also close, since no resultant exists. Thus, suppose the given forces to be four in number, let the directions of two of these be produced until they intersect and their resultant found; this resultant must pass through the point of intersection of the remaining two forces, since equilibrium obtains. Hence the rule above established for forces acting at a com-

mon point' applies also to this case, and the force polygon must close if they are in equilibrium.

If several forces have different points of application, and the force polygon does not close, the line joining the initial and final points represents the intensity and direction of the resultant. For, as a force can be considered as acting at any point in the line of its direction two of them may be combined into a resultant, and this resultant may be combined with one of the other forces, and so on until the final resultant is obtained in the same manner as in Art. 2.

If several forces have different points of application, and the force polygon closes, it is not necessarily true that the given forces are in equilibrium. For example, let a beam or stick be acted upon by three forces as shown in Fig. 5, the




Fig. 5.

forces P_1 , P_2 , and P_3 being equal, P_1 and P_2 making an angle of 30 degrees with the horizontal and P_3 being vertical. It is plain that equilibrium is here impossible, and

yet the force polygon abc closes. Upon reflection it will be seen that the equilibrium of the beam under the action of the three given forces can only be maintained by a couple, that is, by two equal parallel forces acting in opposite directions. It is because the resultant of the forces of a couple is zero that the force polygon closes in this case; and it will be found that in all instances of non-equilibrium where the force polygon closes that a couple is necessary to maintain equilibrium.

The above conditions apply to forces lying in one plane. It is rare in problems relating to roofs and bridges that forces acting in different planes need to be considered, and hence in the following pages it will always be understood, unless otherwise stated, that the forces under discussion lie in the same plane.

Prob. 5. In Fig. 5, let each of the forces be 100 pounds, and let the distance between the points of application of P_1 and P_2 be 4 feet, and between those of P_1 and P_3 be 5 feet. Compute the magnitude of the forces of a horizontal couple to maintain equilibrium when the vertical distance between their points of application is 3 inches. Draw the forces of the couple in both diagrams of Fig. 5.

ART. 4. STRESSES IN A CRANE TRUSS.

As an example of the application of the preceding principles let it be required to graphically determine the stresses in the members B_2 , B_3 , etc., of the crane truss shown in the left-hand diagram of Fig. 6, due to a load P , acting at the peak. The member B_2 is called the tie, B_1 the jib, B_4 the post, and B_3 the back-stay. The post is vertical and its length is 16 feet, the length of the jib is 30 feet, of the tie 21.5 feet, and of the back-stay 20 feet; from these dimensions the diagram of the crane truss is constructed. The load P , is taken as 5 tons.

Using a scale of 2 tons to an inch, the construction of the stress diagram is begun by laying off ab parallel to P , and equal to 5 tons. Now at the peak the force P , is resolved into two forces whose lines of action are in the two members B_2 and B_3 ; hence, by Art. 1, draw ac parallel to B_2 and bc parallel to B_3 , thus obtaining the force triangle abc ; the length of ac gives the stress in B_2 , and that of bc gives the stress in B_3 . Next passing to the apex n the stress

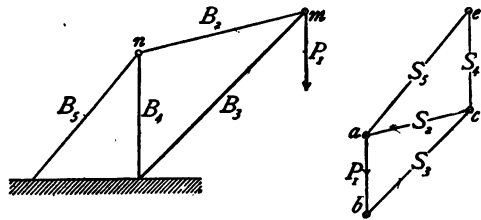


Fig. 6.

in B_2 is known and those in B_1 and B_3 are to be found; hence from a and c draw parallels to these members and these lines, intersecting at e , give ce as the stress in B_1 , and ae as that in B_3 . This completes the force diagram.

The next step is to determine the character of the stresses, that is, whether they are tension or compression. Beginning with the triangle abc , which represents the forces acting at the apex m , the direction of ab is known to be downward, hence following around the triangle (Art. 1) the stress S_1 acts from b toward c , and S_2 from c toward a ; transferring these directions to the lines of action at the apex m it is seen that S_1 acts toward m , and is therefore compression, while S_2 acts away from m , and is therefore tension. Passing now to the apex n the stress S_3 in B_3 is known to be tension and hence it acts away from n , accordingly in the force triangle cae it acts from a toward c ; hence S_4 acts from c to e , and S_5 from e to a ; transferring these directions to the lines of action at n it is found that S_4 is tension and S_5 is compression.

Applying the scale to the lines of the force diagram the following results are now found, the sign $+$ denoting tension and $-$ denoting compression :

$$S_1 = +6.7, \quad S_2 = -9.35, \quad S_3 = -6.85, \quad S_4 = +10.8 \text{ tons.}$$

These are the stresses in the members B_1 , B_2 , B_3 , and B_4 due to the load of 5 tons acting at the peak. If 10 tons were hung at the peak it is plain that each line of the force triangle would be twice as long as before, or the stresses in the members would be double the values above given.

The two parts of Fig. 6 are called the 'truss diagram' and the 'stress diagram' respectively. Each triangle in the stress diagram $abce$ corresponds to the forces acting at one of the apexes in the truss diagram, so that it may be said that the two figures are reciprocal.

Prob. 6. In Fig. 6 let B_1 be vertical and let $B_2 = 30$, $B_3 = 45$, $B_4 = 50$, and $B_5 = 90$ feet. Draw the stress diagram and determine the stresses in all the members due to a force of 6 tons which acts at an angle of 30 degrees to the right of the vertical drawn through the peak m .

ART. 5. STRESSES IN A POLYGONAL FRAME.

In Fig. 7 let B_1, B_2, B_3, B_4 be a polygonal frame which supports the loads P_1 and P_4 and which is itself suspended by the forces P_2 and P_3 acting in two ropes. The frame being in equilibrium under the action of the exterior forces $P_1, P_2, P_3,$ and P_4 , it is required to find the stresses in the members $B_1, B_2, B_3,$ and B_4 .

As the exterior forces $P_1, P_2, P_3,$ and P_4 are in equilibrium, the force polygon representing them must close (Art. 3). First, then, let the force polygon $abcd$ be drawn, ab representing P_1

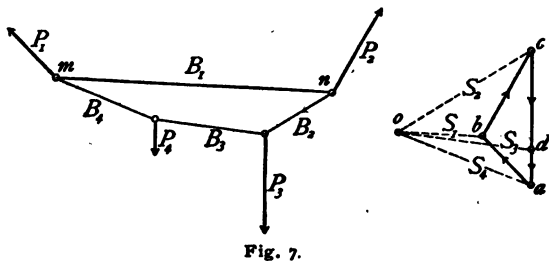


Fig. 7.

in magnitude and direction, bc representing P_2 , and so on. Now at each apex of the polygonal frame there are three forces which are in equilibrium. Thus at m the force P_1 is known, and if from b and a lines be drawn parallel to B_1 and B_4 , these intersect in o , giving bo as the stress S_1 in B_1 and ao as the stress S_4 in B_4 . Similarly at each of the other apexes the exterior force may be resolved into components in the two given directions. Thus $S_1, S_2, S_3,$ and S_4 are found as the stresses in $B_1, B_2, B_3,$ and B_4 .

To find the character of these stresses it is only necessary to follow around the sides of each force triangle in the direction indicated by the given force and then to transfer these directions to the corresponding apex of the frame. Thus, at the apex n the direction of P_2 is known and the corresponding force triangle is bco ; in this P_2 acts from b toward c , hence S_2 acts from

c toward o and S_1 acts from o toward b ; transferring these directions to n it is found that S_1 acts toward and S_2 away from n , thus showing S_1 to be compression and S_2 to be tension. In like manner it is found that S_3 and S_4 are also tension.

Prob. 7. If the frame in Fig. 7 be inverted, draw the force diagram and determine the character of the stress in each member.

Prob. 8. In Fig. 7 let each of the forces $P_1, P_2, P_3,$ and P_4 be vertical and equal to 100 pounds. Let B_1 and B_2 be horizontal, the length of the former being 6 feet and that of the latter being 2 feet. Let the lengths of B_3 and B_4 be 5 feet. Draw the force diagram and find the magnitude and character of the stress in each member.

ART. 6. THE EQUILIBRIUM POLYGON.

When a number of forces acting upon a body do not meet in a common point the magnitude and direction of their resultant is found by the closing line of the force polygon (Art. 3), but its line of action is not determined. This will now be found by means of another diagram which is called the equilibrium polygon.

Let four forces represented by $P_1, P_2, P_3,$ and P_4 be given in magnitude, direction, and line of action, and let it be required to fully determine their resultant. Constructing the force polygon $abcde$, the length of the closing line ea represents the magnitude of the resultant, and its direction is from a toward e , being opposite to those of the other forces in following around the polygon (Arts. 2 and 3). Now select any point o and draw the lines $oa, ob, oc, od,$ and oe to the vertices of the force polygon, thus forming five force triangles. In the force triangle oab the lines oa and ob represent two forces which can hold ab in equilibrium if their directions be from b to o and from o to a . Thus each of the forces in the force polygon can be replaced

by its components shown by the broken lines; for example, P_1 has the components S_1 and S_2 . Now through any point m on the line of action of P_1 , draw the lines B_1 and B_2 parallel to S_1 and S_2 respectively, and let B_1 intersect the line of action of the force P_2 at n .

Through n draw B_2 parallel to S_2 , and so on in succession, until finally B_4 is drawn parallel to S_4 .

The lines B_1 and B_4

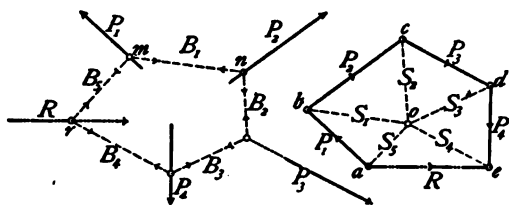


Fig. 8.

will intersect at some point r ; through this point draw a line R parallel to ae and the line of action of the resultant is determined. For, by the construction the forces S_1 and S_2 are the components of the resultant R or ae , and as their lines of action are in B_1 and B_2 , the resultant must pass through the point where they intersect.

If in Fig. 8 there be applied at the point r a force P_6 equal to R but opposite in direction the forces $P_1, P_2, P_3, P_4,$ and P_5 are in equilibrium and the force polygon closes. The polygonal frame B_1, B_2, B_3, B_4, B_5 thus holds the given forces in equilibrium by means of the stresses of tension and compression acting in its members. For the case shown in the figure these stresses are all tensile, and their values are given by the lines $S_1, S_2,$ etc., in the force polygon. The lines of this frame are hence called an 'equilibrium polygon.' The polygonal frame in Fig. 7 is an equilibrium polygon which holds the exterior forces in balance.

The graphic condition of equilibrium for several forces not meeting at the same point may now be expressed by saying that both the force polygon and the equilibrium polygon must close. If the former closes and the latter does not the given forces are not a system in equilibrium. For example,

the three forces P_1 , P_2 , and P_3 in Fig. 9 are equal in magnitude and make angles of 120 degrees with each other, but they are

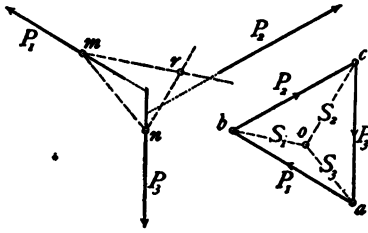


Fig. 9.

not in equilibrium because their lines of action do not intersect in the same point. The force polygon abc here closes. Select any point o and draw the lines oa , ob , and oc , thus resolving the force P_1 into the components S_1 and S_2 , the force P_2 into S_2 and S_3 , and the force P_3 into S_3 and S_1 .

Now select any point m on the line of action of P_1 and draw mr and mn parallel to S_1 and S_2 ; from n , where mn intersects the line of action of P_2 , draw nr parallel to S_3 . Then mr and nr intersect at r which is not on the line of action of P_3 , and hence the three given forces cannot be held in equilibrium by an equilibrium polygon. In this case it is said that the equilibrium polygon does not close. If, however, the force P_3 be moved parallel to itself until its line of action passes through r the force polygon closes and the forces will be in equilibrium.

The point o in the plane of the force polygon is called 'the pole,' and the lines oa , ob , etc., are sometimes called 'rays.' Since the position of the pole may be selected at pleasure it follows that for any given system of forces an infinite number of equilibrium polygons can be constructed. The pole o may be taken either within or without the force polygon as may be most convenient for the solution of the problem under consideration.

Prob. 9. Given two forces of 100 and 180 pounds acting at an angle of 5 degrees with each other, the point of intersection not being within the limits of the drawing. Find the magnitude and direction of the resultant by the force polygon, and its line of action by the equilibrium polygon.

ART. 7. PROPERTIES OF THE EQUILIBRIUM POLYGON.

Let Fig. 10 represent a system of forces P_1, P_2, \dots, P_6 held in equilibrium by the jointed frame or equilibrium polygon whose members are B_1, B_2, \dots, B_6 . This is constructed by first

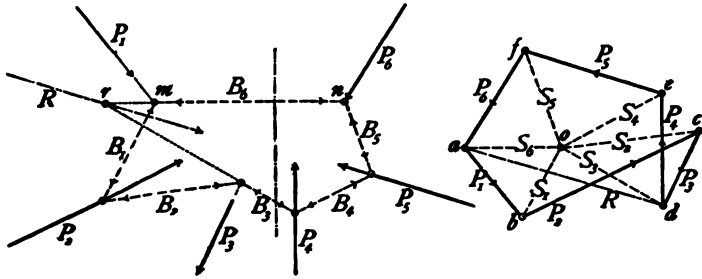


Fig. 10.

drawing the force polygon $abcdef$ which must close, then selecting a pole o and drawing the rays oa, ob, \dots, of , to which the members of the equilibrium polygon are made respectively parallel. The character of the stresses in these members is determined from the force polygon; thus in the triangle abo the directions of bo and oa must be from b to o and from o to a in order to maintain equilibrium; transferring these directions to the other diagram, it is seen that the stresses in B_2 and B_1 act toward the apex m , and hence are compression. Passing next to the vertex n the stress in B_3 is also found to be in compression, and so on. (Art. 4.)

Let this equilibrium polygon be cut by a section shown by the broken and dotted line; the stresses in B_2 and B_1 , the members cut, are given by S_2 and S_1 in the force diagram, and form the closing sides of the polygon $abcdo$ and also of the polygon $defao$. That is, the stresses in B_2 and B_1 hold in equilibrium the external forces P_1, P_2 , and P_3 , and also the external forces P_4, P_5 , and P_6 . Therefore the following principle is established:

The internal stresses in any section hold in equilibrium the external forces on either side of that section.

This principle, it will be observed, is the same as that applicable to the internal stresses in a beam (Mechanics of Materials, Art. 15) or to the internal stresses in a truss (Roofs and Bridges, Part I, Art. 4).

Since the stresses in B_1 and B_2 hold in equilibrium the external forces P_1 , P_2 , and P_3 , the resultant of the former must be equal and opposite to the resultant of the latter. This is also seen in the force polygon where the line ad gives the magnitude of this resultant. To find its line of action let B_1 and B_2 be produced until they meet in r , and through r draw a line equal and parallel to ad . Thus results the following important principle:

The resultant of the external forces on the left of any section passes through the intersection of the sides of the equilibrium polygon cut by that section, its magnitude and direction being given by the force polygon.

The resultant of the external forces on the right of the section is the same in magnitude and line of action as that of those on the left, but its direction is reversed.

When a system of parallel forces are in equilibrium, the force polygon becomes a straight line and the equilibrium polygon has an important special property which will now be deduced. Let P_1 , P_2 , and P_3 in Fig. 11 be three downward forces, held in equilibrium by the two upward forces P_4 and P_5 ; for example, the former might be loads acting on a beam and the latter the reactions of the supports. The force polygon here is $abcdea$, the lines ab , bc , and cd being laid off downward while de and ea are laid off upward, closing the polygon. Selecting any pole o , and drawing the rays oa , ob , etc., the equilibrium polygon $B_1B_2B_3B_4B_5$ is formed (Art. 6). Now let any two sides B_1 and B_2 be cut by a vertical plane, and let the ordinate intercepted between them be called y . The intersection of these sides produced gives the point of application of the resultant of the ex-

ternal forces P_1 and P_2 , whose value is given by eb in the force polygon; let the horizontal distance from y to this point be called r , and the resultant be called R . The bending moment

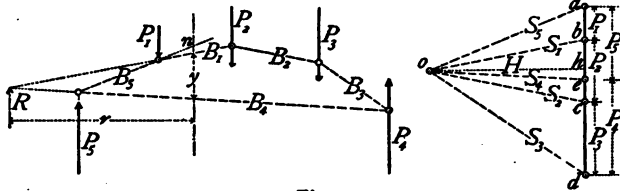


Fig. 11.

M in the given section is then equal to the moment of the resultant of all the forces on the left of that section, or

$$M = Rr.$$

Now in the force polygon let the line ob be drawn horizontally through the pole and its value be called H . Then since the triangle obe is similar to the triangle which has the base y and the altitude r , and since eb is equal to R , we have

$$r : y :: H : R \quad \text{or} \quad Rr = Hy.$$

Therefore the bending moment of the external forces on the left of the section is

$$M = Hy.$$

The force H is seen to be the horizontal component of each of the stresses oa , ob , etc., in the force polygon, that is, of the stresses in the members B_1 , B_2 , etc., in the equilibrium polygon; it is called the 'pole distance,' and is measured by the same scale of force as the other lines in the force polygon. The following theorem can hence be stated:

If a structure be subject to parallel forces, the bending moment in any section parallel to the forces is equal to the ordinate y in the equilibrium polygon multiplied by the pole distance H in the force polygon.

Hence by adopting suitable scales the values of the bending moments can easily be found from the diagram. For instance,

if the linear scale used in laying off the positions of the external forces be 20 feet to the inch, and if the pole be so selected that the distance H is 5 tons, then the moments are measured by a scale of 5 tons \times 20 feet = 100 ton-feet to the inch.

The following is another proof of this important theorem: Let the line B_2 in Fig. 11 be produced until it meets the section in n ; let the vertical distance between n and B_2 be called y_2 , and that between n and B_1 be called y_1 . Let the lever arms of P_1 and P_2 with respect to the section be called p_1 and p_2 . The bending moment for the section then is

$$M = P_2 p_2 - P_1 p_1.$$

But the triangle whose base is y_2 and altitude p_2 is similar to oae , and the triangle whose base is y_1 and altitude p_1 is similar to oab . Hence $P_2 p_2 = Hy_2$ and $P_1 p_1 = Hy_1$; and accordingly

$$M = H(y_2 - y_1).$$

But since $y_2 - y_1 = y$, this gives $M = Hy$, which is the same relation as before deduced.

Prob. 10. Draw an equilibrium polygon for the five vertical forces given in Fig. 11, taking the pole on the right-hand side of the force polygon.

Prob. 11. Given two parallel forces 12 feet apart and acting in opposite directions, one being 6 tons and the other 2 tons. Find by the force and equilibrium polygons the magnitude and line of action of their resultant.

ART. 8. REACTIONS OF BEAMS.

By the use of the force and equilibrium polygons the reactions of the two supports of a beam carrying given loads may be graphically determined. For example, let the beam in Fig. 12 be subject to two concentrated loads as shown, and be in equilibrium under the action of these loads and the two reactions. If the values of the reactions were known an equilibrium poly-

gon could then be constructed which should act instead of the beam to maintain this equilibrium (Art. 7). But since the loads and reactions constitute a system of forces in equilibrium, the principle that the equilibrium polygon must close (Art. 6) furnishes the means of determining the unknown reactions.

Let P_1 and P_2 be the given loads, and let ab and bc be drawn equal and parallel to them. Since the force polygon must close the line ca then represents the sum of the two reactions.

Next let any pole o be selected, and the rays oa , ob , and oc be drawn, and parallel to these let B_1 , B_2 , and B_3 be drawn, thus forming part of the equilibrium polygon.

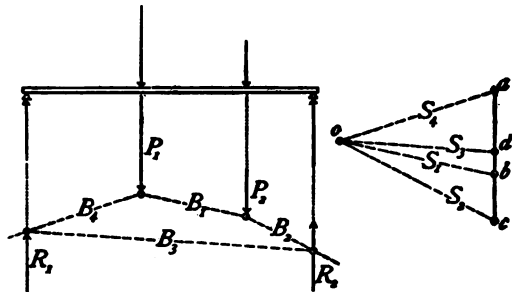


Fig. 12.

This polygon can now be closed by drawing B_3 , joining the points where B_1 and B_2 intersect the lines of action of the reactions. Finally, in the force polygon let od be drawn through o parallel to B_3 ; thus determining the point d ; then cd and da are the two reactions, the former being R_1 , and the latter R_2 . For, cd is the force that holds in equilibrium the stresses S_1 and S_2 in the members B_1 and B_2 , and da is the force that holds in equilibrium the stresses S_2 and S_3 in B_2 and B_3 .

As a second example, let it be required to determine the reactions for the overhanging beam shown in Fig. 13 due to the two given loads. Laying off ab and bc as before, the sum of the reactions is shown by the line ca . Choosing a pole o and drawing oa , ob , and oc , the equilibrium polygon is constructed by taking any point on the line of action of P_1 and drawing B_1 and B_2 parallel to oa and ob respectively. Then from the point where B_2 intersects the line of action of P_2 , the line B_3 is drawn

parallel to oc . Now B_1 intersects the line of action of R_1 at m and B_2 intersects that of R_2 at n ; joining mn by the line B_3

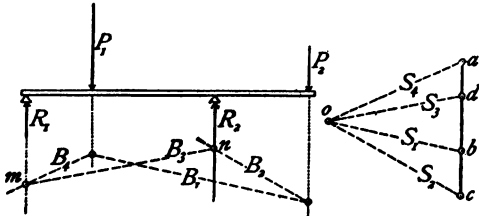


Fig. 13.

closes the equilibrium polygon, and parallel to this closing line od is to be drawn in the force diagram, thus determining the two reactions cd and da .

In both the above figures, any ordinate drawn in the equilibrium polygon gives the bending moment in the beam at the point vertically above it (Art. 7). In Fig. 13 where the sides of the equilibrium polygon cross there is no ordinate, and this corresponds to the position of the inflection point in the beam where the horizontal stresses change from tension to compression.

Prob. 12. Given an overhanging beam as in Fig. 13, its length being 18 feet, and the distance between the supports 14 feet. Determine the reactions due to three loads, one of 200 pounds at 3 feet from the left end, one of 80 pounds at 6 feet from the left end, and one of 90 pounds at the right end.

ART. 9. SIMPLE BEAMS UNDER CONCENTRATED LOADS.

By applying the principles of the preceding articles the vertical shears and the bending moments may be found for all sections of a beam having only two supports and subject to any number of concentrated loads. For example, consider a simple beam 20 feet long, carrying five loads whose positions, and weights in pounds, are shown in Fig. 14. The reactions of the supports are found by laying off the loads successively on the force polygon, or load line af , the first load being ab , the second bc , etc. Select the pole o , draw the rays from o , and construct the equilibrium polygon m, n , etc., its closing line

being ms . Then through o draw og parallel to ms , and the lines fg and ga will represent the reactions of the right and left supports.

Between the left support and the first load the vertical shear equals the reaction ga ; between the first and second loads the vertical shear is $ga - ab = gb$; between the second and third

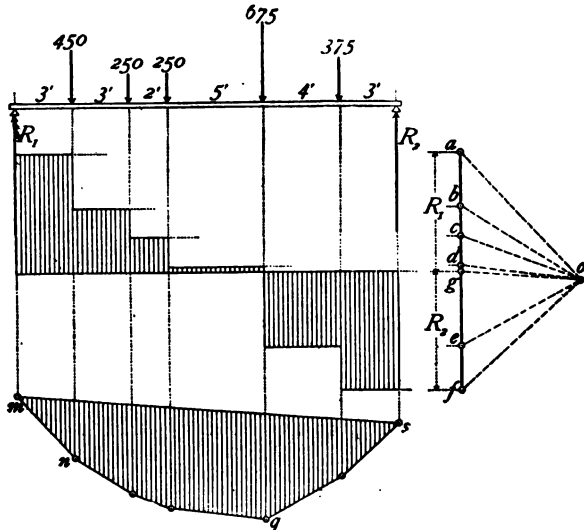


Fig. 14.

loads it is $ga - ab - bc = gc$; and so on. At the fourth load the shear changes from positive to negative, and at the right support its value is the reaction gf . The diagram shown in the figure above the equilibrium polygon gives these shears; and the manner of its construction is apparent, each step being one of the loads. This is called the shear diagram.

The ordinates in the equilibrium polygon, or moment diagram, give the bending moments in the corresponding sections of the beam. It is seen that the maximum ordinate is where the sides of the equilibrium polygon meet that are parallel to od and oe , the rays on opposite sides of and adjacent to og .

the line parallel to the closing side ms of the equilibrium polygon. As the shear immediately on the left of the corresponding section is positive, being measured from g to d , and that on the right is negative, being measured from g to e , the important relation is obtained that the maximum bending moment occurs at the section where the vertical shear passes through zero.

In making the actual construction for Fig. 14 the linear scale used in laying off the beam and the positions of the load was 5 feet to an inch, and the force scale used in the force polygon was 800 pounds to an inch. The pole distance was taken as 1 000 pounds, and hence the moment scale was 5 000 pound-feet to an inch. Any ordinate in the shear diagram, measured by the force scale, gives the vertical shear in pounds; thus, between the second and third loads the shear is $+ 300$ pounds, and between the fourth and fifth loads it is $- 625$ pounds. Any ordinate in the moment diagram, measured by the moment scale, gives the bending moment in pound-feet; thus, the maximum bending moment is 5 500 pound-feet. Fig. 14, however, as here printed, is about one-half the size of the actual construction.

Prob. 13. Construct the shear diagram and moment diagram for a beam 16 feet long, carrying two loads, each of 4 000 pounds, one being at 5 feet from the left end, and the other at 5 feet from the right end.

ART. 10. SIMPLE BEAMS UNDER UNIFORM LOADS.

Let a simple beam whose span is l be uniformly loaded with the weight w per linear unit; then each reaction is equal to half the total load or $\frac{1}{2}wl$. The load may be represented graphically by the shaded rectangle on the beam whose base is l and altitude w .

For any section at a distance x from the left support the vertical shear is $V = \frac{1}{2}wl - wx = w(\frac{1}{2}l - x)$; if V be an ordi-

nate corresponding to an abscissa x this is the equation of a straight line. Thus when $x = 0$, $V = \frac{1}{2}wl$; when $x = \frac{1}{2}l$, $V = 0$; and when $x = l$, $V = -\frac{1}{2}wl$. The shear diagram is hence constructed by laying off gi equal to the span, making gf and ik equal to $\frac{1}{2}wl$ and joining f with k .

The bending moment in a section distant x from the left support is $M = \frac{1}{2}wl \cdot x - wx \cdot \frac{1}{2}x = \frac{1}{2}w(lx - x^2)$. This is the equation of a parabola; for $x = 0$ and $x = l$ the value of M is 0; for $x = \frac{1}{2}l$, M reaches its maximum value $\frac{1}{8}wl^2$.

The moment diagram may hence be constructed by laying off mn equal to the span, drawing qr at the middle equal to the maximum moment, and then constructing the parabola mnr .

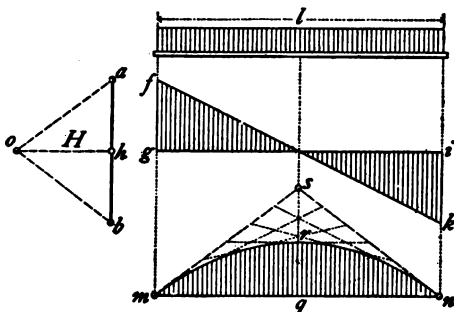


Fig. 15.

To do this the lines ms and ns are drawn, rs being made equal to qr , these are divided into the same number of equal parts and the points of division joined as shown, thus determining tangents to the parabola.

If the entire load on the beam were concentrated at the middle, aba would be the force polygon, and bh and ha the two reactions. Now let o be a pole having the pole distance H , and let the equilibrium polygon msn be constructed. Then from the similar triangles oah and msq ,

$$H : \frac{1}{2}wl :: \frac{1}{2}l : qs.$$

Hence if H be equal to unity on the scale of force, the ordinate qs has the value $\frac{1}{8}wl^2$, and since qr is $\frac{1}{2}wl^2$ the maximum moment for a single concentrated load at the middle is twice as great as that due to the same load when uniformly distributed.

Prob. 14. Prove that the sum of all the moments due to a

uniform load is two-thirds of the sum of all the moments due to the same load when concentrated at the middle.

ART. 11. OVERHANGING BEAMS.

Let a beam be taken with one overhanging end and bearing a number of concentrated loads as shown in Fig. 16. The loads are given in pounds and the distances in feet. If in the force polygon the loads be laid off successively in the order in

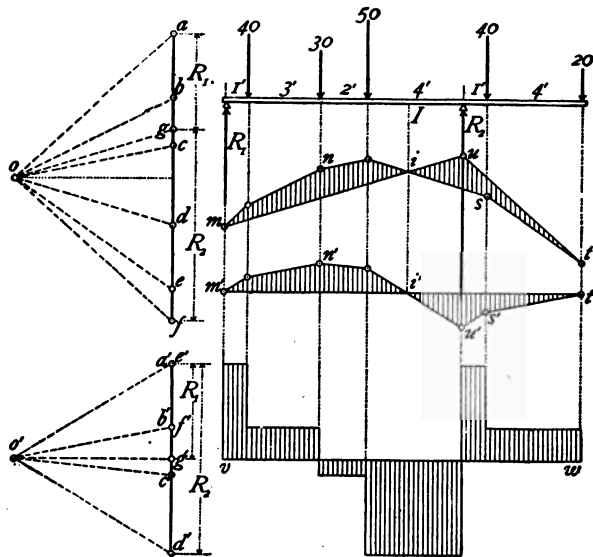


Fig. 16.

which they are on the beam, and the equilibrium polygon $m . . n . . stu$ be constructed, the ray og drawn parallel to the closing line mu will determine the reactions fg and ga . The sides of the equilibrium polygon are found to cross each other at i , and the ordinates to the right of this point lie on the opposite side of the closing line from those on the left. The ordinates on the left being regarded as positive, those on the right are negative, and they give the bending moments for all

sections in the beam. The point I , where the bending moment is zero, is called the inflection point; on the left of this point the lower fibers are in tension while on the right they are in compression.

In order to construct a moment diagram whose ordinates shall be measured from a horizontal line $m't'$, the numerical values of the reactions should first be computed; these are $R_1 = 60$ pounds and $R_2 = 120$ pounds. Now form a force polygon, or load-line, for the reactions and loads by laying off the reaction R_1 from g' upward to a' , then the first three loads in succession from a' downward to d' , then the reaction R_2 from d' upward to e' , and finally the remaining loads from e' downward to g' . Take the pole o' on a perpendicular to the load line at g' . The equilibrium polygon $m' . . n' . . u's't'$ can then be constructed, each of whose ordinates is equal to that in the polygon $m . . n . . stu$.

The method of constructing the shear diagram on the axis vw will be understood without further explanation than that given in Art. 9. It is seen that the shear passes through zero at two points, one where the maximum positive moment occurs, and the other at the right support where the negative moment is a maximum.

The linear scale used in the actual construction of Fig. 16 was 4 feet to an inch, and the force scale was 60 pounds to an inch; the pole distance being 100 pounds, the moment scale was 400 pound-feet to the inch. In the figure as printed the scales are one-half these values. By measurement it is found that the maximum shear is 60 pounds, the maximum positive moment 120 pound-feet, and the maximum negative moment 140 pound-feet.

For the case of a uniform load a shear diagram and moment diagram may be constructed by computing the maximum ordinates and then drawing the straight lines and parabolas (Me-

chanics of Materials, Chap. IV). Thus, let Fig. 17 represent a beam 28 feet long with ends overhanging 4 and 6 feet, and let the uniform load be 40 pounds per linear foot. The left reaction is found by computation to be 497.8, and the right reaction to be 622.2 pounds; these might also be obtained graphically by the equilibrium polygon, regarding the load on each portion of the beam as concentrated at its center. The shear is then found to be zero at c , distant 8.45 feet from the left support, and at this point the positive moment is a maximum, its value by computation being 1 106 pound-feet. At the left support the negative moment is found to be 320 and at the right support 720 pound-feet. These moments being laid off by scale the curves can be constructed by the method given in Art. 10, it being known that the end parabolas have their vertices at m and g , and that the middle parabola has its vertex at n . The inflection points are equally distant from the place

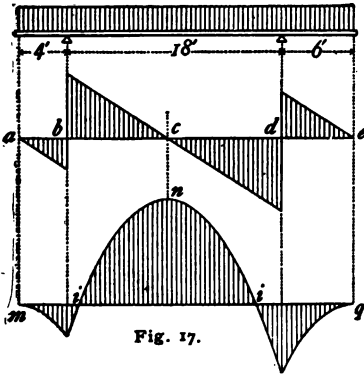


Fig. 17.

of maximum positive moment, this distance being 7.45 feet in Fig. 17. The diagrams thus furnish full information regarding the distribution of the shears and moments in the beam.

Prob. 15. A beam 20 feet long has two overhanging ends, each 5 feet long. Draw the shear and moment diagrams due to a load of 6 tons at one end and a load of 4 tons at the other end.

Prob. 16. A beam 20 feet long has two overhanging ends, each 5 feet long. Draw the shear and moment diagrams due to three loads, one of 6 tons at one end, one of 4 tons at the other end, and one of 8 tons at the middle.

ART. 12. CENTER OF GRAVITY OF CROSS-SECTIONS.

In problems relating to the strength of beams it is necessary to find the position of the neutral axis of the cross-section (Mechanics of Materials, Chap. III). The neutral axis passes through the center of gravity of the cross-section, and in finding the position of the center of gravity the equilibrium polygon may be employed. For instance, let the cross-section of a deck beam shown in Fig. 18 be taken. As this cross-section has an axis of symmetry AD , the center of gravity lies on this axis. The area is divided into simple geometrical figures or narrow strips by lines perpendicular to the axis, and at the centers of gravity of these parts forces proportional to their areas are applied. The force and equilibrium polygons are constructed in the usual manner, taking the pole opposite the center h of the force line and making the pole distance oh equal to ah . The extreme sides of the equilibrium polygon

$m \dots n \dots q$ are produced until they meet at r , the special position of the pole causing them to form the best intersection, that is, at right angles. According to Art. 6, the point r

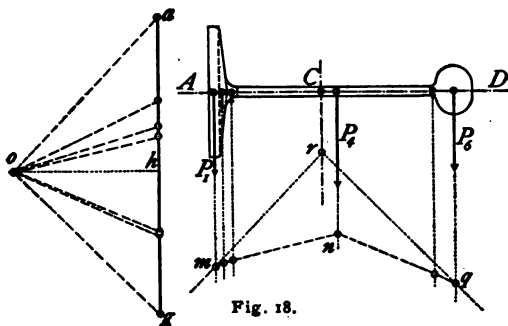


Fig. 18.

is in the line of action of the resultant of the forces considered, hence rC drawn parallel to the forces is the line of action of the resultant. The center of gravity lies on this line and therefore at its intersection with the axis AD .

If the surface is very irregular in outline it should be divided into strips so narrow that the area of each one is equal to the

product of its mean length by its width without appreciable error. If there be no axis of symmetry, the process described above must be repeated for a direction at right angles to the first, and the center of gravity will lie at the intersection of the two resultants found.

Prob. 17. Find the center of gravity of the cross-section of the channel-iron whose dimensions in inches are given in



Fig. 19.

Fig. 19.

Prob. 18. Five parallel forces act in the same direction. Beginning at the left their magnitudes are 45, 120, 30, 225, and 80 pounds, and the successive distances between them are 6, 10, 3, and 8 feet. Determine the magnitude and position of their resultant.

ART. 13. MOMENT OF INERTIA OF CROSS-SECTIONS.

For beams under flexure the bending moment M for any section equals the resisting moment $\frac{SI}{c}$ with reference to the neutral axis in that section in which S is the unit-stress in the most remote fiber distant c from the axis and I is the moment of inertia of the cross-section with reference to the same axis (Mechanics of Materials, Art. 19).

In Art. 12 the method is given for finding the center of gravity through which the neutral axis passes, and the moment of inertia I may be obtained from the same construction by the following rule: Let A be the area of the given cross-section, and A' the area included between the equilibrium polygon and the two lines whose intersection determines the center of gravity; then I is the product of A by A' , or $I = AA'$, provided that the pole distance is $\frac{1}{3}A$. This rule will now be demonstrated in connection with a practical example.

Let it be required to find I for the Pencoyd T iron, No. 109,

shown in Fig. 20. The cross-section A measures 4.04 square inches, and by the force and equilibrium polygon the neutral axis EC is found to be 1.32 inches from the base of the T. Now produce sq until it meets the axis at t . The triangles qtu and ofe are similar, as their sides are mutually parallel. Let y be the distance from q to the axis; then

$$tu : y :: ef : oh.$$

But ef equals the area P_s laid off to scale, and the pole distance oh was made equal to $\frac{1}{2}A$; hence,

$$tu \cdot \frac{1}{2}A = P_s y.$$

Multiplying this by y , and remembering that $\frac{1}{2}tu \cdot y$ is the area of the triangle qtu , gives,

$$\text{area } qtu = \frac{P_s y^2}{A}.$$

The other triangles composing the area between the equilibrium polygon and the lines mr and sr may be expressed in a similar manner.

If the area P_s were of the width dy its moment of inertia would be $P_s y^3$, and by adding all the areas together there would be found,

$$A' = \frac{I}{A}, \quad \text{or} \quad I = AA',$$

in which case the broken line $m \dots nuqs$ becomes a curve which is tangent to the lines mr and sr at the extreme limits of the given cross-section. This curve may be drawn and the area A' determined either by dividing it into strips or by the planimeter.

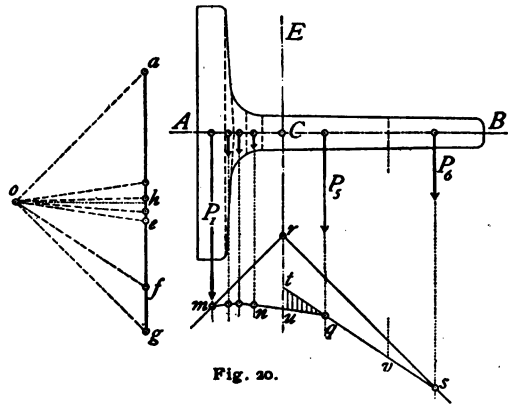


Fig. 20.

By performing the above operations on a full scale drawing for the T iron shown in Fig. 20 the area A' was found by the planimeter to be 1.80 square inches, hence the moment of inertia is

$$I = 4.04 \times 1.80 = 7.27 \text{ inches}^4.$$

This agrees very well with the value given in the manufacturer's pocket-book, which is 7.26 inches⁴.

Prob. 19. Determine the moment of inertia of the channel iron shown in Fig. 19 with respect to an axis through the center of gravity and normal to the web. Determine also the moment of inertia for an axis through the center of gravity and parallel to the web.

ART. 14. GRAPHICAL ARITHMETIC.

In the various operations that are performed on the drawing board cases occur where quantities are to be added, subtracted, multiplied, or divided, and it frequently happens that this may be done by some simple graphical procedure instead of by the common methods of arithmetic. Whatever be the nature of these quantities they are represented by straight lines, the number of units in the length of a line denoting the magnitude of the quantity.

To add together several lines it is only necessary to place them end to end and then measure the total length by the scale.

To subtract one line from another the first is to be laid off from the end of the second in the opposite direction and then their difference can be measured by the scale.

To add algebraically several quantities, some positive and some negative, the sum of the lines representing the negative ones is to be found and subtracted from the sum of the lines representing the positive ones.

To multiply any line of length a by any quantity represented by a line of length m , let OX and OY be drawn making a convenient angle with each other. Lay off Ob equal to unity, Oa equal to a , and Om equal to m . Then Oy is the required product $a \times m$. For, by similar triangles,

$$Oy : Om :: Oa : Ob,$$

whence

$$Oy = Oa \times Om = a \times m.$$

By successive applications of this principle the product of several factors may be found.

To divide a line of length m by one of length b , let Oa be laid off equal to unity, Om equal to m , and Ob equal to b ; then making the construction as before, the similar triangles give

$$Oy = Om \div Ob = m \div b,$$

and hence Oy is the quotient found by dividing m by b .

By the help of the principle of similar triangles a number of graphical constructions can be made for adding and multiplying fractions.

For instance, let it be required to find the product of the two fractions $\frac{6}{13}$ and $\frac{9}{8}$. On any line OX lay off, as in Fig. 22, $Oa = 13$ and $Oc = 8$;

erect the ordinates $ab = 6$ and $cd = 9$; join Ob and Od . Select any abscissa Ox , in this case taken as 10, draw the ordinate xy , and taking Ox' equal to xy , draw the ordinate $x'y'$. Then the product of the two fractions is one-tenth of $x'y'$. For, by similar triangles,

$$\frac{ab}{Oa} = \frac{xy}{Ox} \quad \text{and} \quad \frac{cd}{Oc} = \frac{x'y'}{Ox'}.$$

Multiplying these together, term by term, and inserting the values, there results

$$\frac{6}{13} \times \frac{9}{8} = \frac{x'y'}{10}.$$



Fig. 21.




Fig. 22.

Measuring $x'y'$ by the scale it is found to be 5.2; hence the required product is 0.52.

Prob. 20. Show by Fig. 21 how to graphically transform the fraction $\frac{2.5}{5.5}$ to an equivalent fraction having 9 for its denominator.

Prob. 21. Make the following graphical constructions: (a) to square a given number, (b) to extract the square root, (c) to find the reciprocal, the final result in each case to be represented by the length of a straight line.

CHAPTER II.

ROOF TRUSSES.

ART. 15. DEFINITIONS AND PRINCIPLES.

A roof truss is a structure whose plane is vertical, and is supported at its ends by the side walls of the building, being so arranged that its principal members are subject only to tensile or compressive stresses under the influence of the loads which it is designed to carry.

The points where the center lines of the adjacent members meet are the centers of the connections which form the joints. The joints of the truss are supposed to be perfectly flexible, and the external forces, consisting of the loads and reactions, to be applied only at the joints.

For stability the elementary figures composing a truss must be triangles, since a triangle is the only polygon which cannot change its shape without altering the lengths of its sides when loaded at one or more joints.

The 'span' of a truss is the distance between the end joints or the centers of the supports, and the 'rise' is the distance from the highest point, or peak, to the line on which the span is measured.

The 'upper chord' consists of the upper line of members extending from one support to the other. Each half of the upper chord of a triangular truss is sometimes designated the 'main rafter.' The lower line of members is known as the 'lower chord' or 'tie rod.'

The 'web members' or 'braces' connect the joints of the

upper with those of the lower chord, and may be either verticals, diagonals, or radials.

A member which takes compression is called a 'strut,' and one that takes tension a 'tie.' The upper chord and some of the braces are subject to compression while the lower chord and the rest of the braces are in tension.

The fundamental principles of Graphic Statics as given in Chapter I apply to the determination of the stresses in trusses under given conditions of loading, in the manner indicated in Art. 4. The notation employed in this chapter for designating




Fig. 23.

truss members and loads differs from that previously used, the letters being placed upon spaces instead of upon lines, and any member is named by the letters between which it is situated. Thus, in Fig. 23, AC and BC are the two rafters and CD is the tie rod, while AB designates the load at the peak.

Prob. 22. The span in the simple triangular roof truss of Fig. 23 is 26 feet, and the rise is 6 feet 6 inches. Find the stresses in the members due to a load at the peak of 2050 pounds.

ART. 16. DEAD AND SNOW LOADS.

Four kinds of loads are to be considered in discussing a truss: the weight of the truss itself, the weight of roof covering, the snow, and the wind.

The weight of the truss depends upon its span and rise, the distance between adjacent trusses, the kind of material used in the construction of the roof covering and the truss, and other elements of design. This weight is ascertained from the results of experience. In RICKER'S 'Construction of Trussed Roofs,' page 46, is a table derived from data given by different authori-

ties which seems to afford the best figures now attainable. The following formulas give results approximately agreeing with those found by the use of this table:

$$\text{For wooden trusses, } W = \frac{1}{3}al(1 + \frac{1}{10}l),$$

$$\text{For wrought-iron trusses, } W = \frac{2}{3}al(1 + \frac{1}{10}l),$$

in which l is the span in feet, a the distance in feet between adjacent trusses, and W the approximate weight of one truss in pounds. The wooden trusses are to have wrought iron tension members in accordance with the usual practice. It is seen that they are one-third lighter than the wrought iron trusses.

The roof covering consists of the exterior 'shingling' of tin, slate, tiles, corrugated iron, or wooden shingles, resting usually upon timber 'sheathing,' which is supported by 'purlins,' or beams running longitudinally between the trusses and fastened to them at the upper joints. In large roofs the sheathing is laid upon 'rafters' parallel to the upper chord, the rafters resting upon the purlins. The actual weight of the roof covering, rafters, and purlins is to be determined only by computation for each particular case, but the following values will serve for preliminary designs and approximate computations. The weights given are in all cases per square foot of roof surface.

For shingling—tin, 1 pound; wooden shingles, 2 or 3 pounds; iron, 1 to 3 pounds; slates, 10 pounds; tiles, 12 to 25 pounds.

For sheathing—boards 1 inch thick, 3 to 5 pounds.

For rafters—1.5 to 3 pounds.

For purlins—wood, 1 to 3 pounds; iron, 2 to 4 pounds.

Total roof covering—from 5 to 35 pounds per square foot of roof surface.

The snow load varies with the latitude, being about 30 pounds per horizontal square foot in Northern New England, Canada, and Minnesota, about 20 pounds in the latitude of New York City and Chicago, about 10 pounds in the latitude

of Baltimore and Cincinnati, and rapidly diminishes southward. On roofs having an inclination to the horizontal of 60 degrees or more this load may be neglected, as it might be expected that the snow would slide off.

The weight of a roof truss with that of the roof covering which it bears is termed the 'dead load' or 'permanent load.'

For the purpose of securing uniformity in the solution of the examples and problems given in this book, the following average values will be used, unless otherwise specified :

For the truss weight—compute from the above formulas.

For the roof covering—12 pounds per square foot of roof surface.

For the snow load—15 pounds per square foot of horizontal area.

The weight of the roof covering, and of the snow which may be upon it, is brought by the purlins to the joints or 'apexes' of the upper chords. The weight of the truss itself is also generally regarded as concentrated at the same points, the larger part of it being actually applied there. At each apex of the upper chord there is hence a load called an 'apex load,' and it may be a 'dead apex load' or a 'snow apex load.'

In the wooden truss whose outlines are shown in Fig. 24, let the span be 48 feet, the rise 10 feet, and the distance

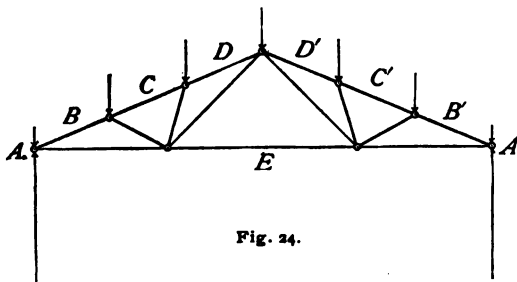


Fig. 24.

between the trusses 12 feet. Then the length of the rafter is $\sqrt{24^2 + 10^2} = 26$ feet. Each main rafter is divided into three equal parts called

'panels.' From the formula the truss weight is found to be 1 670 pounds. The weight of the roof covering on each rafter

is $25 \times 12 \times 12 = 3\,744$ pounds. The weight of the snow supported by the entire truss is $48 \times 12 \times 15 = 8\,640$ pounds. The total dead load is $1\,670 + 2 \times 3\,744 = 9\,158$ pounds, and the dead apex loads BC , CD , DD' , $D'C'$, and $C'B'$ are each one-sixth of the total load or $1\,526$ pounds, while AB and $B'A'$ are each one-half as much, or 763 pounds. The snow apex loads are in like manner $1\,440$ pounds and 720 pounds. The apex load is also called the 'panel load.'

If the panels be of unequal lengths, the load at any apex is found by considering that the weights brought to it by the purlins are those upon a rectangle extending in each direction half-way to the adjacent apexes.

When the two halves of the truss are symmetrical the reactions of the supports are equal, each being one-half of the total load. When the truss is unsymmetrical, the reactions are found in the same way as for concentrated loads on a beam. In the above example each dead load reaction is $4\,579$ pounds and each snow load reaction is $4\,320$ pounds.

The reaction and the half apex load acting at each support produce an effective reaction equal to their difference. This effective reaction is that due to the other apex loads, and therefore the half apex loads at the supports may be omitted entirely from consideration. The effective reaction for the above example is $4\,320 - 720 = 3\,600$ pounds, or by disregarding the loads at the supports it is one-half the sum of the full panel loads, thus, $\frac{1}{2}(5 \times 1\,440) = 3\,600$ pounds.

Prob. 23. A wrought iron truss, like Fig. 24, has a span of 60 feet, rise 14 feet, and distance between trusses 16 feet. Find the apex loads and reactions due to dead and snow loads.

Prob. 24. A wrought iron truss of the above form has a span of 90 feet 6 inches and a rise of 18 feet 9 inches, the trusses being 18 feet apart. Compute the apex loads and reactions.

ART. 17. STRESSES DUE TO DEAD AND SNOW LOADS.

The wooden truss shown in Fig. 25 has a span of 42 feet, rise at peak 14 feet, rise at hip 10 feet 3 inches, horizontal distance from hip to peak 12 feet 6 inches, and a distance between trusses of 8 feet.

The lengths of the members BG and EL are each $\sqrt{8.5^2 + 10.25^2} = 13.32$ feet, and of CH and DK $\sqrt{12.5^2 + 3.75^2} = 13.05$ feet. The weight of the truss is found to be 874 pounds by the formula in Art. 16. The roof covering on BG weighs $13.32 \times 8 \times 12 = 1279$ pounds, and on CH is $13.05 \times 8 \times 12 = 1253$ pounds. The snow load on BG is $8.5 \times 8 \times 15 = 1020$ pounds, and on CH is $12.5 \times 8 \times 15 = 1500$ pounds. The apex loads, expressed in pounds, are then as follows:

	$AB = EF$	$BC = DE$	CD	TOTAL
Truss,	109	218	218	872
Roof covering,	640	1266	1253	5065
Dead,	749	1484	1471	5937
Snow,	510	1260	1500	5040

Each dead load reaction is therefore 2969 pounds, and each snow load reaction 2520 pounds.

The truss diagram, Fig. 25, composed of the center lines of the truss members, is carefully drawn to as large a scale as convenient, each joint being marked by a fine needle point and surrounded by a small circle to limit the lines drawn toward the point. In the actual construction the diagram was drawn to a scale of 3 feet to an inch, but the above figure is reduced to nearly one-seventh of the original size.

The external forces acting upon the truss are in equilibrium, and hence form a closed force polygon (Art. 2). These forces being parallel the resulting polygon becomes a straight line, which is called the 'load line.'

Taking first only the dead load and using a suitable scale (1 000 pounds to an inch was used on the original drawing), the apex loads taken in regular order from left to right are laid off in succession on the vertical load line *af* in Fig. 26, thus: the distance *ab* is laid off equal to the load *AB* or 749 pounds, then *bc* equal to the load *BC*, and so on. Next *fm* is laid off upward equal to the reaction *FM* or 2 969 pounds, and *ma* equal to *MA*, *A* thus closing the polygon.

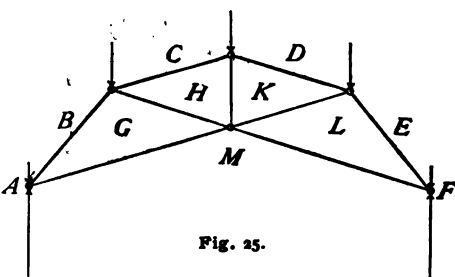


Fig. 25.

Beginning with the joint at the left support where the reaction *MA* and the load *AB* are held in equilibrium by the stresses in *BG* and *MG* the polygon representing these forces will also be closed; *bg* is therefore drawn parallel to *BG* and *mg* parallel to *MG*. The lengths of *bg* and *mg*, measured by the scale used on the load line, give the magnitudes of the stresses in these members. To find the character of the stresses the direction around the polygon indicated by the upward reaction is followed, that is, from *m* to *a*, *a* to *b*, *b* to *g*, and from *g* to *m*. Transferring these directions to the joint considered, the stress in *BG* acts toward the joint and is therefore compression, while that in *GM* acts away from the joint and is tension.

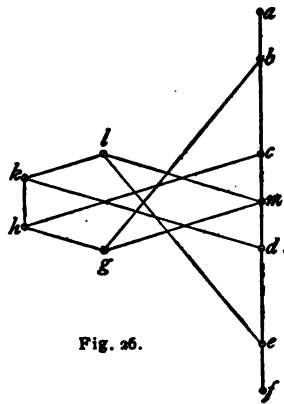


Fig. 26.

The stress diagram is continued by passing to the left hip-joint and constructing the force polygon *bchg* to represent the stresses in the members meeting at that joint. Next are constructed the polygons for the right support, the right hip-joint,

and finally for the joint at the peak. The closing line hk must be parallel to HK , and the entire diagram be symmetrical with respect to a horizontal axis through m . These closed force polygons are drawn for all the joints taken in succession because the loads and stresses acting upon each joint in the truss are in equilibrium.

The points l , k , h , and g , in Fig. 26, may be regarded as the poles of the various equilibrium polygons which surround the spaces L , K , H , and G , in Fig. 25. After the application of the principles is fully understood, it is not necessary even to consider the entire polygon for any one joint. In determining the point h , for instance, which corresponds to the space H , it is found that the points g and c corresponding to the spaces G and C , that are adjacent to H , are already fixed in position, whence by drawing ch parallel to CH and gh parallel to GH the point h is obtained by their intersection.

The method given above for finding the character of the stresses requires passing around the perimeter of every force polygon contained in the stress diagram, unless the truss and its loading are symmetrical, in which case only one half of the polygons are so used. The line representing the stress in each member must in all cases be traced twice, and if no external force acts at any joint the direction of passing around the corresponding force polygon must be obtained from the character of the stress in one of its connected members already found. Thus, for the middle joint of the lower chord the stress in GM is known to be tension, and therefore acts away from this joint; that is, toward the left. The polygon $mgghklm$ must therefore be followed around in the direction indicated by the order of the letters here given.

Another method will now be described by which the character of the stress in any member may be determined without reference to that in any other member, and by which considerable time may be saved. For convenient reference

Figs. 25 and 26 are reprinted on this page, a slight addition being made to the latter as will be explained, and therefore it is marked Fig. 26a.

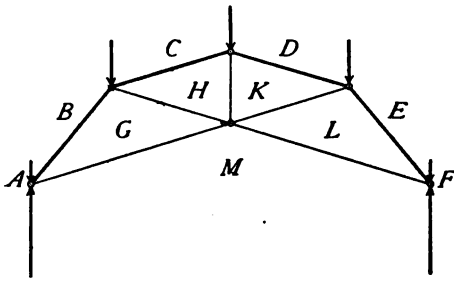


Fig. 25.

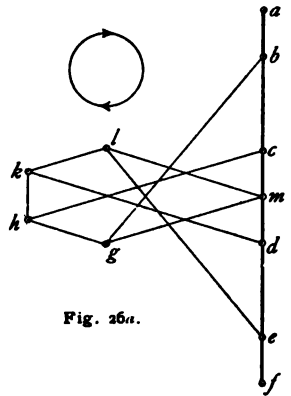


Fig. 26a.

The loads AB , BC , CD , DE , and EF , and the reactions FM and MA , were laid off on the load line in Fig. 26a in the order just stated; that is, they were taken in regular order while passing around the truss in Fig. 25 in the direction of the hands of a watch. As an aid in remembering this fact the circular arrow is placed aside of the stress diagram. By passing in the same direction around the left hip joint, for instance, the letters in the adjacent spaces occur in the order $C-H-G-B-C$. The corresponding force polygon has the same lower-case letters at its vertices, and is to be followed around so that its letters $c-h-g-b-c$ shall also have the same order. When the directions thus indicated, c to h , h to g , etc., are transferred to the joint, ch acts toward it and is therefore compression, while hg , acting away from it, is tension, and gb is compression. Again, let it be required to find the kind of stress in ML . With reference to the middle joint of the lower chord these letters occur in the order $L-M$, hence the direction of its stress is from l to m in the stress diagram. As this direction is away from the joint, LM must be in tension.

As it is evident that trusses supported like that in Fig. 25 have the upper chord in compression and the lower chord in tension, whatever the arrangement of the web members may be, it usually remains to find only the kinds of stress in the web members. In this example they may all be found by considering the order of the letters in the web spaces with reference to the middle joint of the lower chord, and in any other truss having more web members by similarly taking the letters in their regular succession with reference to the respective joints of one of the chords. Let the student test this statement in the next article and observe that the web stresses will thus form a connected chain which may be rapidly traced. Let the joints of the lower chord be used first, and those of

the upper chord afterwards, for a comparison of their relative convenience.




Fig. 27.

Considering now the polygon $chgmabc$ in Fig. 26a, the forces represented by its sides are in equilibrium since the polygon is closed. Referring to Fig. 25 it is seen that the stresses in CH , HG , and GM are in equilibrium with the reaction MA and loads AB and BC on the left of a section cutting these members. But $chgmfedc$ is also a closed polygon, hence the stresses in the same members are in equilibrium with the reaction and loads on the right of the section. Thus is again demonstrated the principle that the internal stresses in any section hold in equilibrium all the external forces on either side of the section (Art. 7).

The stress diagram for snow load, Fig. 27, is next constructed in a similar manner to that for dead load. As the snow loads are here laid off in the reverse order from the dead loads, the diagram is situated on the right of the load line instead of on the left as in the preceding figure.

The lines in all the diagrams are to be drawn with a well-sharpened pencil pressed lightly on the paper so as to produce a very fine line. As soon as an intersection is obtained it is to be marked with a needle point, enclosed with a small circle, and designated by the proper letter; other lines drawn to or from that point are not to pass within the circumference of this circle. The triangle and straight edge used in drawing parallel lines should be so arranged as to require the triangle to be moved the shortest distance. Special care is needed to hold the pencil at the same inclination from the beginning to the end of a line, or the line will not be strictly parallel to the edge of the triangle.

The following results, expressed in pounds, are now obtained by applying the scale of force to the stress diagrams :

TRUSS MEMBERS.	$BG = EL$	$CH = DK$	$GM = LM$	$GH = KL$	HK
Dead load stresses.	- 3 860	- 3 860	+ 2 580	+ 1 280	+ 750
Snow load stresses.	- 3 500	- 3 640	+ 2 340	+ 1 310	+ 600

When but a slight difference is found between the lengths of any pair of symmetrical lines in the stress diagram the average of the two is to be used; otherwise the diagram should be re-drawn.

As a final check the stresses in CH are computed (Roofs and Bridges, Part I, Art. 5), the lever arm of CH being measured on the truss diagram and found to be 7.27 feet. The stress due to dead load thus obtained is 3 861 pounds, and that due to snow load is 3 640 pounds.

Prob. 25. The upper chord of a wrought iron truss like Fig. 24 is divided into six equal panels, the triangle formed by the middle panel of each main rafter with the adjacent braces being isosceles. The span is 78 feet, the rise 19 feet 6 inches, and the trusses are 16 feet 6 inches apart, center to center. Find the dead and snow load stresses.

ART. 18. A TRIANGULAR ROOF TRUSS.

In the wrought iron truss in Fig. 28 the upper chord is divided into eight equal panels, verticals are drawn through the apexes, and the diagonals slope upward toward the center. Let the span be 80 feet, the rise of peak 15 feet, the lower

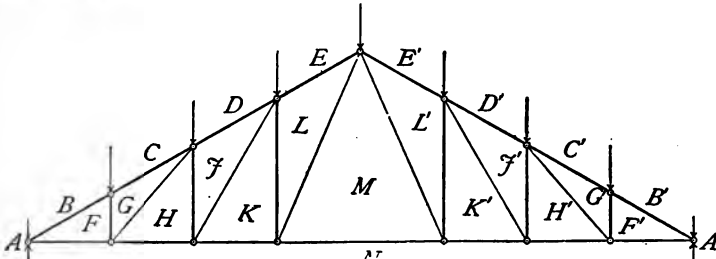


Fig. 28.

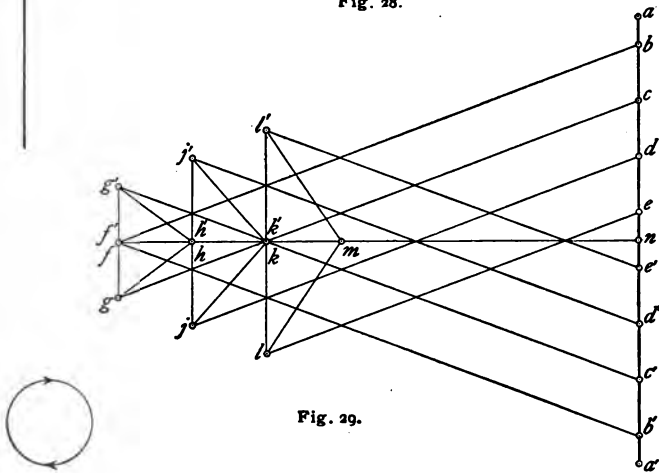


Fig. 29.

chord horizontal, and the distance between adjacent trusses 18 feet, center to center.

The main rafter is found to be 42.72 feet, and each panel 10.68 feet long. The weight of the truss is 9 720 pounds, and of the roof covering 18 455 pounds, making the total dead load

28 175 pounds. The dead apex load is one-eighth of this amount, or 3 522 pounds, and the half apex loads at the supports are each 1 761 pounds.

Since the inclination of each panel of the upper chord is the same the snow apex loads are equal, each one being $10 \times 18 \times 15 = 2\,700$ pounds. The ratio between any snow apex load and a dead apex load being $\frac{2\,700}{3\,522} = 0.7666$, the stresses caused by the snow load will bear the same ratio to those due to dead load, and hence only the dead load stress diagram is required.

The construction is begun by laying off the load line aa' equal to 28 175 pounds by scale and bisecting it at n . The half apex loads ab and $a'b'$ are next laid off equal to 1 761 pounds and bb' divided into seven equal parts. The reactions are $a'n$ and na , closing the polygon of external forces. The polygons representing the forces acting at each joint are successively formed, as explained in Art. 17, by beginning at the left support, passing to joints alternately on the upper and lower chords until the peak is reached, then going to the right support and passing from joint to joint until the peak is reached again. The last line to be drawn is $l'm$, which must be parallel to $L'M$ and pass through the intersection m of the lines lm and nm . The diagram if accurately drawn will be symmetrical with respect to nf ; the distances fh , hk , and km will be equal, the points g , j , and l lying on a line parallel to $f'b'$ drawn through a point below b' on the load line at a distance equal to $b'c'$. Again, cg and $c'g'$ will pass through the intersection k of nf and ll' . As a final check the stress in MN may be computed; thus,

$$(14\,088 - 1\,761)40 - 3\,522(30 + 20 + 10) - S \times 15 = 0;$$

from which the value of S is + 18 784 pounds.

The scale of this stress diagram should be such that the line bf will not be longer than the main rafter of the truss diagram. The dead load stresses in the following table were obtained by

using scales of 5 feet to an inch and 4 000 pounds to an inch. The stresses due to snow load are then found by multiplying the dead load stresses by the ratio 0.7666.

TRUSS MEMBERS.		DEAD LOAD STRESSES.	SNOW LOAD STRESSES.
		Pounds.	Pounds.
Upper chord,	<i>BF</i>	- 35 090	- 26 900
	<i>CG</i>	- 35 090	- 26 900
	<i>DJ</i>	- 30 080	- 23 060
	<i>EL</i>	- 25 070	- 19 220
Lower chord,	<i>FN</i>	+ 32 870	+ 25 200
	<i>HN</i>	+ 28 180	+ 21 600
	<i>KN</i>	+ 23 480	+ 18 000
	<i>MN</i>	+ 18 780	+ 14 400
Braces,	<i>FG</i>	- 3 520	- 2 700
	<i>GH</i>	+ 5 870	+ 4 500
	<i>HJ</i>	- 5 280	- 4 050
	<i>JK</i>	+ 7 060	+ 5 410
	<i>KL</i>	- 7 040	- 5 400
	<i>LM</i>	+ 8 450	+ 6 480

Prob. 26. A wooden truss of the type of Fig. 28 has a span of 60 feet, rise 15 feet, and distance between trusses 14 feet. The upper chord is divided into six equal panels. Find the apex loads, reactions, and the dead and snow load stresses in all the members.

ART. 19. WIND LOADS.

The pressure produced by the wind on a roof surface depends on the direction and velocity of the wind and on the inclination of the roof. The wind is supposed to move horizontally, and a hurricane at 100 miles per hour exerts a pressure of probably 50 pounds per square foot of surface normal to its direction.

In determining the stresses due to wind it is often specified that the wind pressure shall be taken at 40 pounds per square foot of vertical surface.

While the subject is not fully understood, experiments show that the resultant pressure of a horizontal wind on an inclined surface may be represented by a normal force varying with the roof inclination. The following values deduced from experiments give the normal pressure per square foot for a horizontal wind pressure of 40 pounds per square foot for different inclinations of the roof surface :

INCLIN.	NOR. PRESS.	INCLIN.	NOR. PRESS.	INCLIN.	NOR. PRESS.
5°	5.1	25°	22.6	45°	36.0
10°	9.6	30°	26.5	50°	38.1
15°	14.2	35°	30.1	55°	39.4
20°	18.4	40°	33.3	60°	40.0

For all inclinations exceeding 60 degrees the normal pressure is 40 pounds per square foot, and for intermediate inclinations the pressures are obtained by interpolation. Should the horizontal wind pressure be assumed lower or higher than 40 pounds the normal pressure is to be changed in the same ratio.

Let it be required to find the wind apex loads for the truss whose dimensions are given in Fig. 30. The inclination of AB is found to be 50°

40' and that of BC 16° 40', hence from the above table the normal wind pressures are respectively 38.3 and 15.6 pounds

per square foot. If the trusses be 12 feet apart the total normal wind pressure on AB is

$$\sqrt{9.6^2 + 11.7^2} \times 12 \times 38.3 = 6\,954 \text{ pounds,}$$

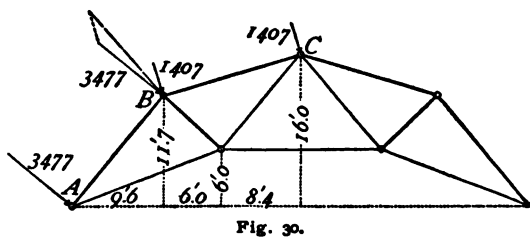


Fig. 30.

one-half of which is applied at A and one-half at B , as shown. In the same way the wind upon BC brings at B and C two normal apex loads, each of 1 407 pounds.

The two apex loads at B are then combined by means of the force triangle, the resultant being 4 711 pounds.

Prob. 27. Find the wind apex loads for the truss in Fig. 25, using the dimensions given in Art. 17.

ART. 20. A TRUSS WITH FIXED ENDS.

Roof trusses of short span, especially wooden trusses, generally have both ends firmly 'fixed' to the supporting walls. The reactions caused by the wind pressure are inclined and their

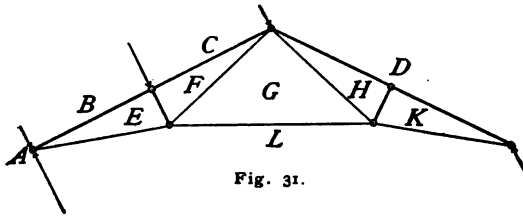


Fig. 31.

horizontal components tend to overturn the walls of the building.

Let the truss in Fig. 31 have both ends fixed, the span being 40 feet, the rise of peak 10 feet, the rise of horizontal tie rod 2 feet, and the distance between trusses 12 feet.

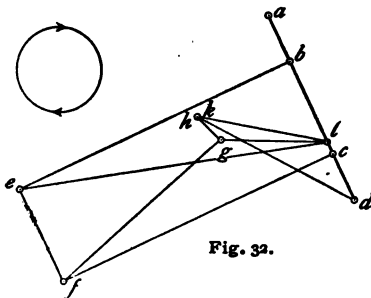


Fig. 32.

The length of the main rafter is found to be 22.36 feet, its inclination $26^{\circ} 34'$ and the normal wind pressure (Art. 19) 23.8 pounds per square foot of roof surface. The apex load BC is

$$\frac{1}{2} \times 22.36 \times 12 \times 23.8 = 3\ 193 \text{ pounds} = 1.6 \text{ tons,}$$

and the half apex loads AB and CD are each 0.8 tons.

As the sum of all the external forces in the direction of the wind loads must equal zero, the reactions are parallel to them.

The directions and lines of action of the reactions at the supports being therefore known it is required to find their magnitudes, which is done by the method of Art. 8. The results obtained are 2.2 tons for the left reaction, and 1.0 ton for the right reaction. These values may now be checked by computation. A perpendicular from the right support to the left reaction measures on the truss diagram 35.78 feet. Taking moments about the right support,

$$AL \times 35.78 - 0.8 \times 35.78 - 1.6 \times 24.6 - 0.8 \times 13.42 = 0,$$

whence $AL = 2.2$ tons. In a similar manner, by taking moments about the left support, the reaction DL is found to be 1.0 ton. The same result is obtained both graphically and analytically by replacing the apex wind loads by their resultant, 3.2 tons, applied at the middle of the rafter.

The stress diagram is begun by drawing ad normal to the main rafter and equal to 3.2 tons by the scale of force, while ab and cd are each made one-fourth of the length of ad . The diagram is then completed in the manner described in preceding articles. As h and k are found to coincide it shows that there is no stress in HK when the wind blows on the left side of the truss.

With scales of 3 feet to an inch and 1 ton to an inch the results given in the table were obtained. As a check the stress in GL is computed, the same value being found as that given in the table.

If the wind loads be placed on the right-hand side of the truss the corresponding stress diagram will be the same as Fig. 32 when revolved about a vertical axis, therefore only one stress diagram is required in this case. Accordingly the stresses in the members of either

MEMBERS.	STRESSES.
	Tons.
BE	- 4.68
CF	- 4.68
EL	+ 4.88
GL	+ 1.68
EF	- 1.60
FG	+ 3.32
DK	- 2.79
DH	- 2.79
LK	+ 2.08
HK	o
GH	+ 0.52

half of the truss when the wind blows on the right are the same as the stresses in the corresponding members of the other half of the truss for wind on the left side. For instance, the stress in GH is $+3.32$ and in EF is zero for wind on the right.

Prob. 28. Find the wind stresses in all the members of the truss in Prob. 26, both ends being firmly bolted to the walls.

ART. 21. A TRUSS WITH ONE END FREE.

Changes in temperature cause expansion and contraction in iron trusses which if both ends are fixed give rise to certain stresses. To avoid these only one end is fastened to the sup-





Fig. 33.

porting wall, the other being merely supported or 'free,' so that it may move horizontally in the direction of the length of the truss.

The free end may rest upon a smooth iron plate upon which it slides, but this arrangement requires too much friction to be overcome in the case of heavy roofs, especially if the plate becomes rusty. Sometimes it is attached to a rocker, as at A in Fig. 33, and often rollers are employed, as shown at B . If no friction exists at the free end the reaction there is vertical.

In determining the stresses due to wind when one end is fixed and the other free it is necessary to construct two diagrams, one for the wind blowing on the fixed side and the other for the wind load on the free side.

For example, let the truss in Fig. 34 be taken, the span

being 76 feet, rise of upper chord 19 feet, rise of lower chord 4 feet, and the distance between trusses 15 feet. The web members consist of verticals and diagonals as shown, the chords being divided into eight equal parts.

The inclination of the upper chord is the same as that in the last article, hence the normal wind pressure per square foot

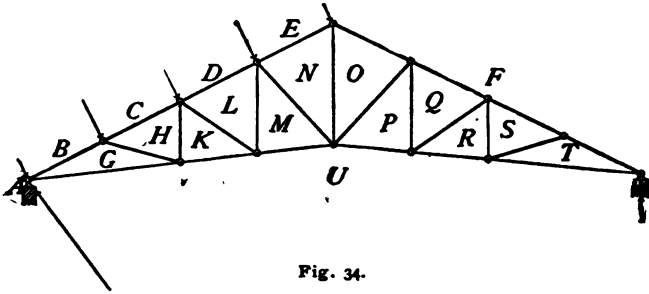


Fig. 34.

is 23.8 pounds, the apex loads BC , CD , and DE are 1.9 tons each, and the loads AB and EF are 0.95 tons each.

The reaction at the free end being vertical, its value is most readily found by computation. Taking moments about the left support and considering the total wind load concentrated at the middle of the rafter,

$$7.6 \times 21.24 - FU \times 76 = 0, \text{ whence } FU = 2.12 \text{ tons.}$$

In Fig. 35 let af be drawn perpendicular to the loaded upper chord and made equal to 7.6 tons; ab and ef are then laid off equal to 0.95 tons each, and be divided into three equal parts. The vertical reaction fu is next drawn equal to 2.12 tons, and as the other reaction must close the force polygon, ua repre-

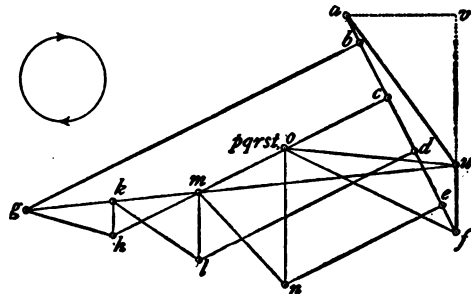


Fig. 35.

sents the magnitude and direction of the reaction UA at the fixed end.

The student should notice particularly that it is not possible for the reaction at the fixed end to be parallel to the wind loads when one end rests on rollers.

The stress diagram is constructed in the usual manner by beginning with the forces acting at the left support, and passing to joints alternately on the upper and lower chords. After the joint $DENML$ is reached the forces at the peak are taken instead of passing to the central joint of the lower chord. The force polygon for the peak is $nefon$, the point o being determined by it. Now passing to the joint below the peak the corresponding force polygon requires a parallel to UP to be drawn through u , and a parallel to OP through o . It is found however that the former parallel passes through o , thus closing the polygon and reducing op to zero. But uo , of , and fu form a closed force triangle which indicates that O belongs to the entire space between the chords in the right half of the truss; therefore in this part of the truss each chord has the same stress in every panel and no web member is stressed when the wind blows on the opposite side.

The same thing may be shown in a different manner by beginning at the right support where the reaction FU is held in equilibrium by the stresses in UT and FT . The force triangle fuo represents this relation, uo being the stress in UT and fo that in FT . Passing to the next joint on the upper chord it is required to draw a triangle two of whose sides shall be parallel to the straight upper chord and the third side parallel to ST . This causes the two sides to coincide and the third side to disappear, hence the stress in FS equals that in FT and the stress in ST is zero. The same conditions occur at each joint on the upper and lower chords to the right of the middle of the truss.

If the stress diagram be accurately drawn, the point *m* marks the intersection of *ch*, *ug*, *lm*, and *nm*. The points *g*, *h*, *l*, and *n* will lie in a straight line and be equidistant.

When the wind blows upon the free side of the roof, as in Fig. 36, the apex loads are the same as before, and the reaction

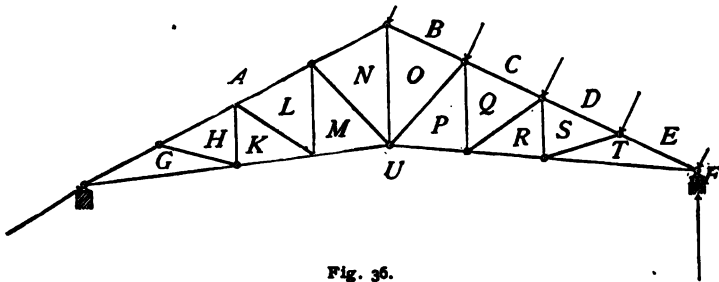


Fig. 36.

FU equals 4.68 tons. After *fa* in Fig. 37 is laid off, *fu* is drawn vertically equal to 4.68 tons by scale, its length being the same as *uv* in Fig. 35. In this stress diagram which is completed similarly to Fig. 35, *an* represents the stress in the upper chord, and *un* that in the lower chord, of the left half of the truss. The braces on the left of *NO* are not affected by the wind on the right.

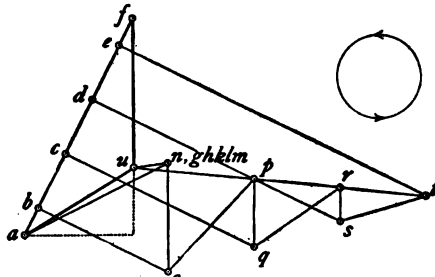


Fig. 37.

The actual construction of the diagrams for this example was made to scales of 6 feet to an inch and 2 tons to an inch, and the results are shown in Figs. 38 and 39. The stresses are marked on the skeleton truss diagrams for convenient comparison, the members in compression being indicated by heavy lines and the tensile members by light lines. The checks by computation give - 6.01 tons for the stress in *FO*, Fig. 34, and - 5.00 tons in *AN*, Fig. 36.

It is seen that greater stresses are produced in the chords except EN , and in the center vertical when the wind blows on the

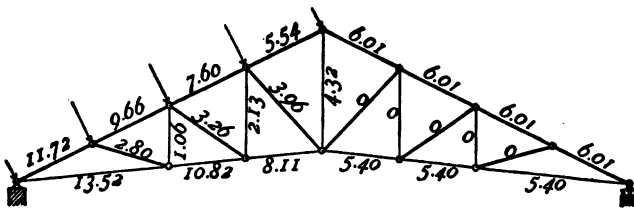


Fig. 38.

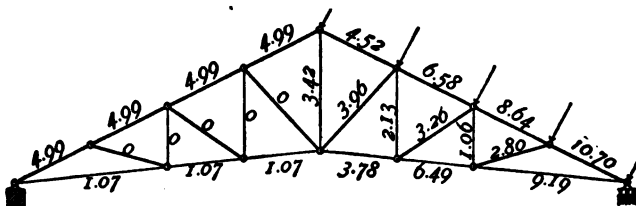


Fig. 39.

fixed side, while the stresses in the braces to the windward with the exception of NO , are the same for the wind blowing on either side.

The reactions may also be obtained graphically. The direction of the reaction at the fixed end is unknown, but its line of action passes through the joint at that end, hence the equilibrium polygon should be drawn from that joint to a vertical through the support at the free end. The ray drawn parallel to the closing line will then intersect the vertical through f at the point u .

Prob. 29. Determine the reactions for the example in this article by the equilibrium polygon.

Prob. 30. Find the wind stresses for the truss in Fig. 28, using the dimensions given in Art. 18. The right end is to rest on rollers.

ART. 22. ABBREVIATED METHODS FOR WIND STRESS.

When the lower chord is horizontal the stresses in the main rafter either to the windward or to the leeward are the same

for the wind blowing either on the fixed or on the free side. The difference between the stresses in the horizontal chord

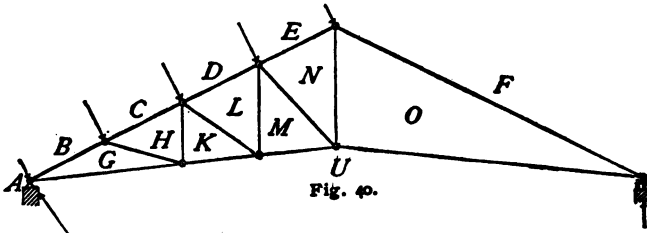


Fig. 40.

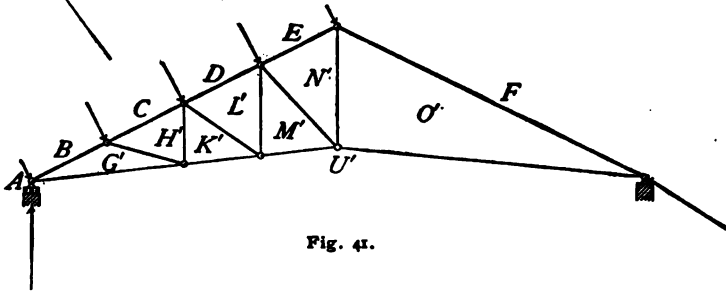


Fig. 41.

under the two conditions equals the horizontal component (av , in Fig. 35) of the wind loads, the tension being less when the wind blows on the free side. In such a case, then, only one wind stress diagram is really needed.

Even if the lower chord is raised, a few additional lines on the diagram for wind on the fixed side render the other diagram unnecessary. The full lines in Fig. 42 are simply a copy of Fig. 35 and the truss diagram in Fig. 40 is lettered to correspond, the rollers being at the right support. Now supposing the wind loads to remain unchanged and the rollers to be transferred to the left support,

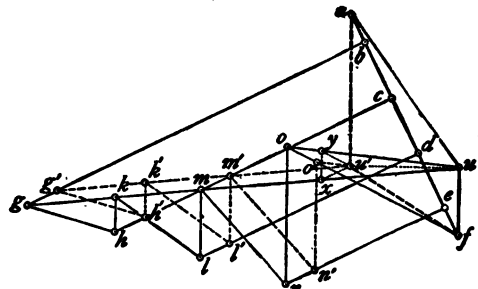


Fig. 42.

the corresponding stress diagram is that shown in broken lines. This relation of the wind loads, the truss, and the rollers is illustrated in Fig. 41.

Let a horizontal line be drawn through u until it meets the vertical through a at u' , and join u' with f and a thus giving the new reactions fu' and $u'a$. Let $u'x$ be drawn parallel to bg meeting ug at x , and $u'y$ parallel to fo meeting uo at y . The line joining x and y will be parallel to no .

The stresses in the main rafter are changed when the rollers are transferred to the left support by the amount $gg' = hh' = ll' = nn' = u'x = u'y = oo'$, those in the lower chord are changed by $ux = uy$, and that in NO by xy , while the remaining stresses are unaltered.

Applying the scale, $u'x$ and $u'y$ are each found to be 1.02 tons, the differences ux and uy are each 4.33 tons and xy measures 0.90 tons. In the following table the first line contains the stresses obtained from Fig. 35, and after subtracting the changes of stress, the same results are obtained as those derived from Fig. 37:

STRESSES FOR WIND ON THE LEFT.

TRUSS MEMBERS, . .	BG	CH	DL	EN	FO	UG	UK	UM	UO	NO
Rollers on right, . .	11.72	9.66	7.60	5.54	6.01	13.52	10.82	8.11	5.40	4.32
Changes in stresses, .	1.02	1.02	1.02	1.02	1.02	4.33	4.33	4.33	4.33	0.90
Rollers on left, . . .	10.70	8.64	6.58	4.52	4.99	9.19	6.49	3.78	1.07	3.42
TRUSS MEMBERS, . .	BG'	CH'	DL'	EN'	FO'	U'G'	U'K'	U'M'	U'O'	N'O'

For any other type of truss the changes are likewise easily obtained. When the middle panel has a horizontal tie as in the example given on Plate I, the form of the auxiliary polygon $u'xzy$ is somewhat different from the preceding one and the change for the horizontal tie is measured from k to z . The following measurements were obtained from the original diagram which was made with a scale of 2 tons to an inch: $u'x =$

ART. 23. COMPLETE STRESSES FOR A TRIANGULAR TRUSS. 57

$u'y = 0.88$ tons, $kx = ky = 4.29$ tons, $kz = 4.17$ tons, and $xz = yz = 0.40$ tons.

Prob. 31. Prepare a table of wind stresses similar to the above for the example given on Plate I.

Prob. 32. Find the wind stresses for a wooden truss like Fig. 34 whose span is 74 feet, rise of peak 19 feet, the lower chord being horizontal and the trusses 16 feet 3 inches apart.

ART. 23. COMPLETE STRESSES FOR A TRIANGULAR TRUSS.

On Plate I are given the dimensions of a wrought iron roof truss together with the specified loads. The struts are normal to the rafters as shown on the skeleton outline of the truss. All the diagrams required to determine the stresses due to dead, snow, and wind loads are shown, and are constructed in the manner explained in the preceding articles of this Chapter. The stresses as measured by scale (2 tons to an inch on the original) are arranged in tabular form.

The preliminary computations give the following results :

Length of rafter,	41.15 feet.
Weight of truss,	3.85 tons.
Weight of roof covering,	8.15 tons.
Total dead load,	12.00 tons.
Dead apex load,	1.50 tons.
Dead load reaction,	6.00 tons.
Snow apex load,	1.14 tons.
Ratio of snow load stresses to dead load stresses,	0.76.
Inclination of roof surface,	25° 57'.
Normal wind pressure per square foot of roof,	23.3 pounds.
Total wind load,	7.92 tons.
Wind apex load,	1.98 tons.
Horizontal component of total wind load,	3.47 tons.
Vertical component of total wind load,	7.12 tons.
Reaction at free end for wind on fixed side,	2.20 tons.
Reaction at free end for wind on free side,	4.92 tons.



The reactions are obtained graphically as follows: Supposing both ends of the truss to be fixed, the reactions due to wind on the left side are au and ua in the stress diagram marked 'wind on fixed side.' They are obtained by the method of Art. 8. The pole is at o and the equilibrium polygon is rst , the wind apex loads being concentrated at apex 2. But since the right end of the truss rests on rollers the reaction AK of the right support is vertical and is represented by the line ak or the vertical component of au . The closing side ka of the force polygon represents the reaction of the left support. Applying the scale the value of ak is found to be 2.2 tons, which is also the value of the vertical component of the reaction of the left support when the wind blows on the right side.

In order to design a member for the range of stress (Mechanics of Materials, Art. 81), it is necessary to know the minimum stress as well as the maximum stress to which it is subjected by the combined loads. As the dead load always acts its effect must be included in finding both the minimum and the maximum stresses. Snow load always produces stresses of the same kind as the dead load when the rafters are straight, and, hence is used only in obtaining the maximum. As the wind cannot blow on more than one side of the roof at the same time, only one of the wind stresses is to be combined with the dead, or with the dead and snow load stresses. If in any member a stress produced by the wind is of a different kind from that due to dead load, the minimum stress equals the algebraic sum of the two, but when, as in the present example, all the stresses in any member are either tensile or compressive, the minimum equals the dead load stress and the maximum equals the sum of the dead, snow, and larger wind load stresses.

It is seen from the table that the maximum chord stresses are greater on the fixed side than on the free side, while the maximum stresses in the bracing are the same on both sides.

LOADS.


DIMENSIONS of wrought iron truss, see formula.
 Span, 74 feet. Roof covering, 12 pounds per square foot of roof surface.
 Rise of lower chord, 12 feet. Snow load, 15 pounds per square foot of horizontal projection.
 Trusses 16.5 feet apart. Wind load, 40 pounds per square foot of vertical projection.
 Length of rafters, 20 feet.
 Eight equal panels.

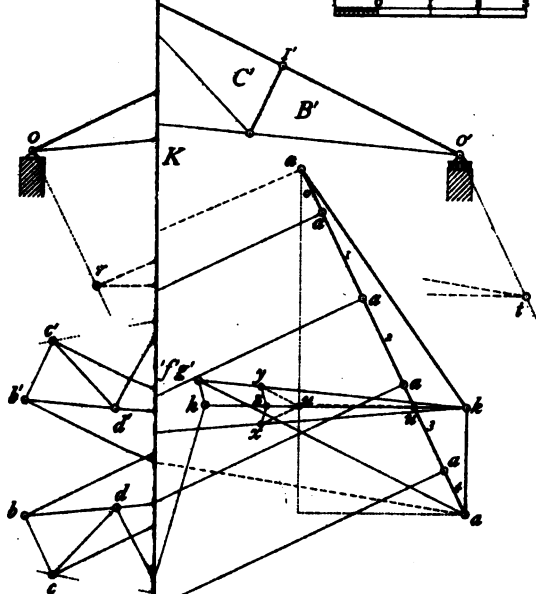

WIND ON FIXED SIDE.


TRUSS MOMENTS.	
Dead load.....	
Snow load.....	
Wind on fixed side.....	
Wind on free side.....	
Maximum.....	
Minimum.....	

TRUSS MOMENTS.	
Dead load.....	
Snow load.....	
Wind on fixed side.....	
Wind on free side.....	
Maximum.....	
Minimum.....	



WIND ON FREE SIDE.

+ 1



ART. 24. COMPLETE STRESSES FOR A CRESCENT TRUSS. 59

Prob. 33. A wrought iron truss of the type shown in Fig. 28 has a span of 76 feet, rise of peak 18 feet, and rise of tie *MN* 3 feet. The trusses are 16 feet 6 inches apart, their right ends resting on rollers. Find the maximum and minimum stresses in all the members.

ART. 24. COMPLETE STRESSES FOR A CRESCENT TRUSS.

In the crescent truss whose outline and general dimensions are given on Plate II the joints on both the upper and lower chords lie on arcs of circles, and the alternate braces are radials of the upper circular arc.

The following dimensions and apex loads are obtained either graphically or by computation, and in some cases by both methods, one being a check on the other :

Radius of circle containing the joints of the upper chord,	51.25 feet.
Radius of circle containing the joints of the lower chord,	99.06 feet.
Length of panels on the upper chord,	11.08 feet.
Weight of truss,	4.12 tons.
Weight of roof covering,	8.52 tons.
Total dead load,	12.64 tons.
Dead apex load,	1.58 tons.
Dead load reaction,	6.32 tons.
Horizontal projection of panels of upper chord,	8.04, 9.44, 10.53, 10.99 feet.
Snow apex loads,	0.48, 1.05, 1.20, 1.29, 1.32 tons.
Snow load reaction,	4.68 tons.
Inclinations of roof surface,	$43^{\circ} 20'$, $31^{\circ} 05'$, $18^{\circ} 30'$, $6^{\circ} 10'$.
Normal wind pressures per sq. ft.,	35.2, 27.3, 17.2, 6.2 pounds.
Total wind loads on the panels,	3.12, 2.44, 1.52, 0.54 tons.

The dead load stress diagram is constructed in the same way as in previous examples, and is symmetrical with respect to a horizontal axis through *k*. As the snow apex loads are not

uniform a separate diagram for stresses due to snow loads is required, and this one is also symmetrical with respect to a horizontal axis through k .

The wind apex loads are next obtained by combining half of the wind loads on the panels adjacent to each apex as illustrated in Art. 19. On the truss diagram in Plate II the wind apex loads are drawn to double the scale of tons in order to determine their directions with greater precision. The reactions are then obtained by means of the equilibrium polygon (Arts. 6, 8, and 21). The ray ou' , parallel to the closing side of the polygon, intersects the resultant of the wind loads $au'a$ at the point u' giving au' and $u'a$ as the reactions of the right and left supports if both ends of the truss were fixed, but as the right end is free its reaction ak is vertical and equal to the vertical component of au' . The load line for wind on the free side is obtained from that for wind on the fixed side by revolving it about a vertical axis, which operation may be conveniently performed by means of a piece of tracing paper. The point u'' in this diagram is the same as u' in the preceding one, hence only one equilibrium polygon is required. The reaction ka of the right support is the vertical component of $u''a$.

It is observed that when the wind blows on the free side of the truss, it causes compression in the lower chord from KH' to the left end. The stresses in the upper chord are also considerably less than for wind on the fixed side, and if the rise were a little greater it would cause tension in one or more panels near the left support.

The truss diagram for this example should be twice as large as that on Plate II so that no line in any stress diagram would be longer than the truss member to which it is parallel. This relation was here disregarded as the limited size of the plate would have reduced the stress diagrams to indistinctness.




Unless special care is exercised in drawing the wind stress

DIMENSIONS.


Span, 78 feet. Rise, 18 feet.
 Depth at center, 10 feet.
 Trusses 16 feet apart, c to c.
 Eight panels equal on upper chord.

LOADS.

Same as on Plate I.

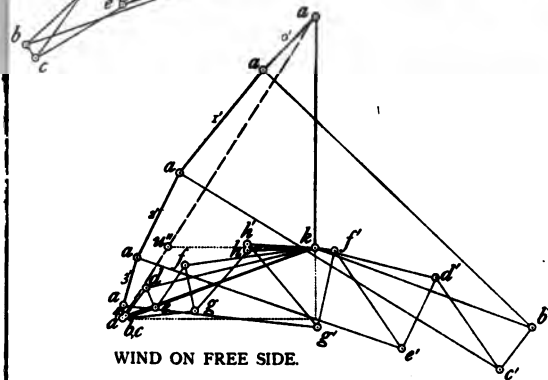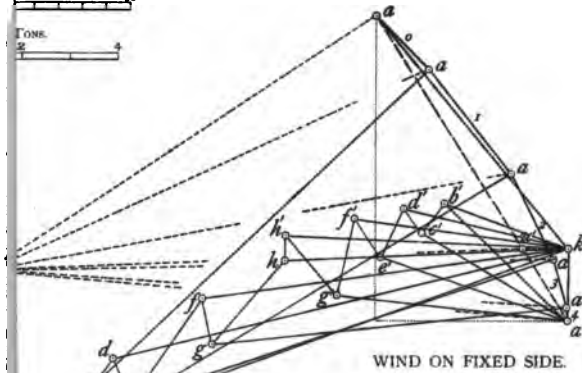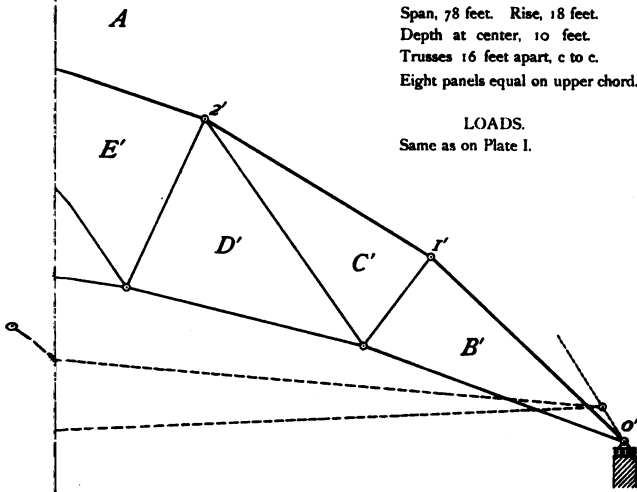

H.S.J.



diagrams they will not close. As they lack the check of symmetry it is not so easy to locate the error, and therefore it is best to construct new diagrams until one is obtained that closes properly. In all cases the work should proceed from each support toward the center of the truss.

Upon the completion of the stress diagrams their lines are measured by the scale of force, the stresses arranged in a table and the maximum and minimum stresses found, as explained in the preceding article. For instance, the maximum stress in KD is $+ 10.8 + 8.5 + 9.7 = + 29.0$ tons, and its minimum stress is $+ 10.8 - 3.6 = + 7.2$ tons. The maximum stress in GH is $- 0.1 + 2.3 = + 2.2$ tons and the minimum stress in the same member is $- 0.1 - 0.1 - 1.7 = - 1.9$ tons.

Prob. 34. Find the maximum and minimum stresses in all the members of Fig. 30, the right end resting on rollers.

ART. 25. AMBIGUOUS CASES.

When, in the determination of the stresses in the Fink truss shown in Fig. 43, the joint at the middle of the rafter is reached the load BC and the stresses in BG and GH are known, leaving three stresses unknown, namely, those in CL , LK , and KH . As the resultant of the load and the known stresses cannot be resolved into more than two given directions, another condition needs to be added.

If the loads AB and CD be equal, as in this example, the symmetrical relation of GH and LK causes them to have equal stresses and therefore fg and lm lie in the same straight line parallel to hk . The polygon $hgbclkh$ is then readily completed. If the loads AB and CD be unequal, the panels remaining equal on the upper chord, the polygon may be drawn by noting that the point k must lie midway between the parallels cl and dm . This follows from the fact that LM is normal to the upper

chord and that KL and MN are of equal length and make the same angle with LM as well as with the upper chord. The triangle lkm is hence an isosceles triangle.

If CL and DM be of unequal lengths then both of these methods fail. A general solution of this problem was given by

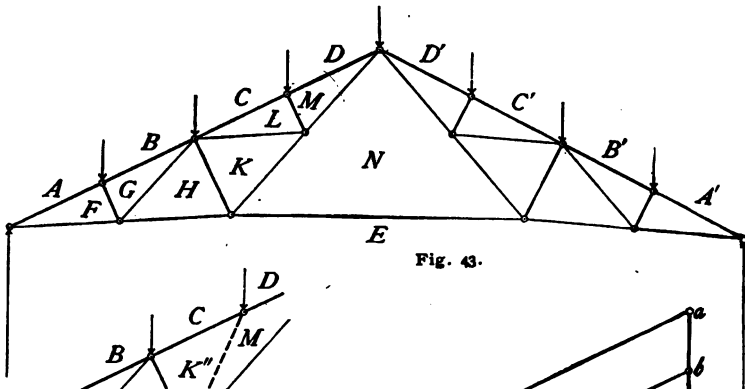


Fig. 43.




Fig. 44.



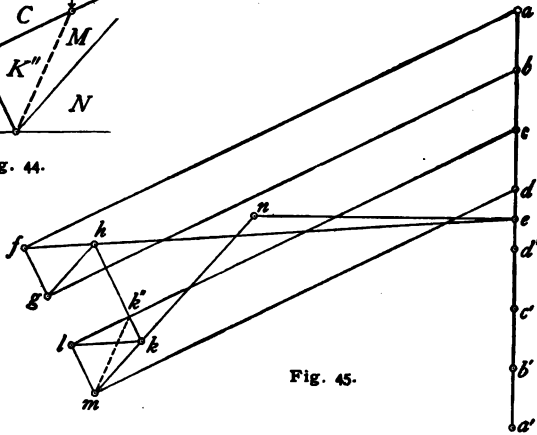


Fig. 45.

WILLETT in a paper read before the Chicago Chapter of the American Institute of Architects, March 22, 1888, which consists in temporarily changing the webbing of the truss.


Let the braces KL and LM be removed and the diagonal $K''M$ be substituted as shown in Fig. 44. The load BC and the stresses in BG and GH being known, those in HK'' and $K''C$ are found from the polygon $hgbck''h$ in Fig. 45. For the next apex on the upper chord the polygon is $k''cdmk''$, the

line mk' being the unknown stress thus determined. Passing to the joint $HK''MNE$ where three stresses are now known, the polygon $chk''mne$ gives the unknown stresses mn and ne . As the line mn is now fixed, the original webbing is restored and the remaining parts of the stress diagram drawn; hk'' is produced to meet mn at k , and kl and ml are drawn parallel to KL and ML respectively to meet ck'' produced at l .

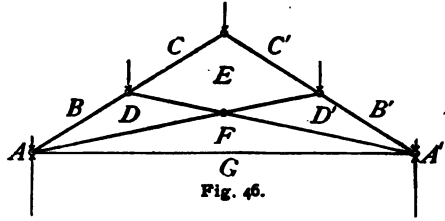

The remaining half of the diagram is not shown in Fig. 45. If each half of the truss and the loading upon it be equal to the other, the complete stress diagram will be symmetrical with respect to a horizontal axis through e .

In the truss whose outline is given in Fig. 46 it is not possible to begin the stress diagram by considering the forces acting at the left support, since three unknown stresses hold in equilibrium the known reaction and half apex load.



At the peak the load CC' is supported by two members whose stresses are $c'e$ and ec in Fig. 47. The quadrilateral $bced$ gives the stresses in the members meeting at the joint $BCED$, and $c'b'd'e$ gives those for the corresponding joint in the right half of the truss. Passing to the joint below the peak the stress polygon is found to be $ded'f$. For the left support the reaction, half apex load, and the stresses bd and df are known, but one stress remains unknown. As equilibrium exists at this joint the polygon must be closed by the line fg , which is also to be parallel to FG . This completes the diagram, and by following around the

polygons all the stresses are found to be compression except fg , which is tension.

Suppose the tie FG to be omitted. Each reaction must then be inclined in order to maintain equilibrium, its horizontal component being equal to fg . The reaction of the right support is therefore $a'f$ (not drawn) and that of the left support fa .

Prob. 35. Find the dead load stresses in the wooden truss of Fig. 48, the span being 36 feet, the rise 12 feet, and the distance between trusses 12 feet. Then find the stresses for a truss like Fig. 46 of the same dimensions and compare the results.



Fig. 48.

Prob. 36. A wooden truss like Fig. 49 has a span of 48 feet and a rise of 12 feet, both ends being fixed. Find the maximum and minimum stresses, the trusses being 14 feet apart.




Fig. 49.

ART. 26. UNSYMMETRICAL LOADS AND TRUSSES.

In mills and shops, loads are frequently suspended from the lower chords of the roof trusses, as for instance, lines of shafting, etc. In such cases it is convenient to determine the stresses due to the loads by means of a separate diagram, as illustrated in Fig. 50. The load AB produces no stress in DE or FG , while it causes stresses in the other members of the same kind as those due to dead, snow, and wind loads, and hence their

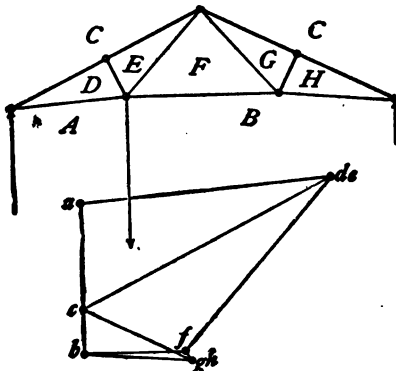


Fig. 50.

maximum stresses are increased. In special cases such sus-

pended loads may even change some maximum stresses due to the other loads from compression to tension or from tension to compression.

When a ceiling is attached to the lower chord it becomes a part of the dead load and needs no separate diagram. It is combined at once with the other loads in the dead load diagram, all the loads and reactions being taken in regular order around the truss and laid off on the load line, some portions of which will be found to overlap.

It was formerly the practice in England to find the effect of the wind on roof trusses by taking vertical loads of 20 pounds or more per square foot of horizontal projection, acting upon one side of the roof. Fig. 51 shows a truss under such loads and the resulting stress diagram.

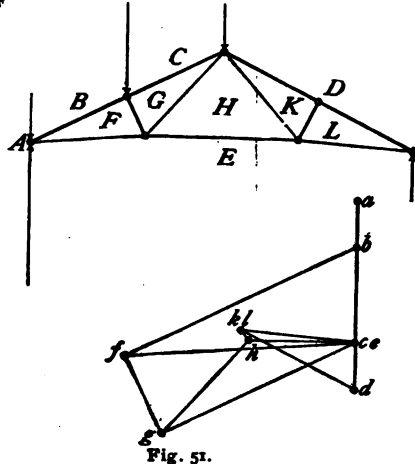


Fig. 51.

It is observed that the stress thus caused in BF is greater than that in CG , while under normal wind loads they are equal.

In Fig. 52 is given an unsymmetrical truss under the action of dead load. The stress diagram is hence unsymmetrical and has also fewer checks upon its construction. The main check however still remains, which requires that after working from each support toward the peak the closing line op shall be parallel to the member OP . To determine the stresses in an unsymmetrical truss by the analytic method materially increases the labor of computation required for a symmetrical truss, but with the graphic method it makes no difference whatever for any type of truss.

Prob. 37. Let the load AB in Fig. 50 be 1.75 tons, and the dimensions of the truss the same as given in Art. 20. Find the stresses in all the members.

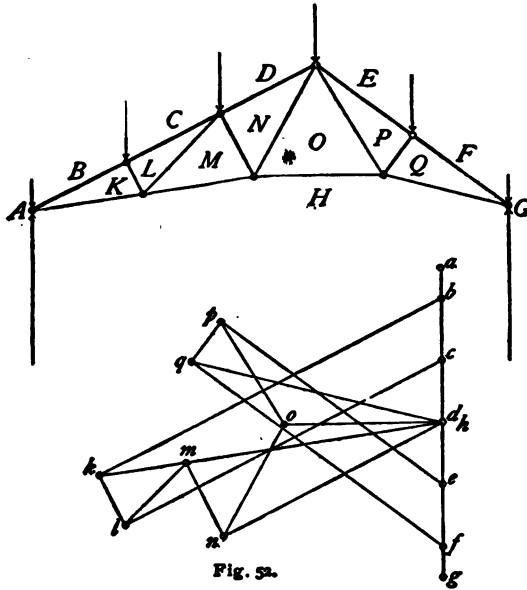


Fig. 50.

Prob. 38. Find the wind stresses for the same truss under a vertical wind pressure of 20 pounds per horizontal square foot, and compare the results with those obtained in Art. 20.

CHAPTER III.

BRIDGE TRUSSES.

ART. 27. LOADS ON BRIDGE TRUSSES.

The weight of the floor, lateral bracing, trusses, and all the pieces that unite and stiffen them, compose the dead load of a bridge. This weight depends upon the span, width, and style of the bridge, and upon the live load and unit stresses adopted in its design, and varies considerably in individual cases; it is usually lighter for a highway bridge than for a railroad bridge.

The total weight or dead load of a highway bridge with two trusses may be expressed approximately by the following empirical formula :

$$w = 140 + 12b + 0.2bl - 0.4l,$$

in which w is the weight in pounds per linear foot, b the width of the bridge in feet (including sidewalks, if any), and l the span in feet. The width of a highway bridge in the clear varies from 16 to 24 feet, which is only exceeded in large cities.

The total dead load of a railroad bridge for a standard gauge track may be approximately found from the following empirical formulas :

$$\text{For single track, } w = 560 + 5.6l,$$

$$\text{For double track, } w = 1070 + 10.7l.$$

For spans not exceeding 300 feet these formulas give values usually a little larger than the actual weights, but sufficiently exact for the determination of the stresses. For spans greater than 300 feet they should not be used. The width in the clear between the trusses of a through railroad bridge is about 13 or

14 feet for a single track, and 25 feet for a double track. Wooden and iron bridges of the same strength do not materially differ in weight.

The live load is that which passes over the bridge, and consists of wagons and foot passengers on highway bridges and trains on railroad bridges.

The live loads usually assumed for highway bridges, in pounds per square foot of floor surface, are as follows:

	FOR COUNTRY BRIDGES.	FOR CITY BRIDGES.
Spans under 50 feet,	90	100
Spans 50 to 125 feet,	80	90
Spans 125 to 200 feet,	70	80
Spans over 200 feet,	60	70

This maximum load consists of a dense crowd of people covering the roadway and sidewalks, and as there is less liability to crowds on long spans as compared with short spans, and for country bridges as compared with those in the city, the load is varied accordingly. Each truss supports one-half of the whole load.

By multiplying the given weight per square foot by the clear width of roadway and sidewalks the live load per linear foot of bridge is obtained. This load is to be placed so as to produce the largest possible stress in any truss member considered.

The live load for a railroad bridge is that of the heaviest cars and locomotives which pass, or are to pass, over it. When a bridge is to be designed these loads are generally specified by the railroad company. Several methods of stating the live load are in use:

1st. A uniform load per linear foot of single track, the shortest spans having the heaviest loads, and about as follows:

Span,	50,	100,	150,	200,	300,	400 feet.
Load,	4 200,	3 600,	3 200,	3 000,	2 600,	2 400 pounds.

This method was formerly much used, but is now only occasionally employed for computing the chord stresses.

2d. A uniform train load, varying as above, which is preceded by one panel of heavy locomotive load. If p be the length of the panel in feet this preceding load in pounds is for a single track often taken as $30\,000 + 3\,500p$. Sometimes the locomotive load is used for two or three panels in front of the train instead of for one.

3d. A uniform train load, varying as above, preceded by one or two locomotives with their tenders, the weight of these being taken as concentrated upon the drivers and other wheels. This style of loading will be fully explained in Art. 39.

If the bridge have only one track each truss sustains but one-half the loads above given, but if it have two tracks each truss sustains the loads as stated, for it might happen that both tracks would be covered at the same time.

Prob. 39. A highway bridge in the country has a span of 88 feet, a roadway 16 feet wide, two sidewalks each 4 feet wide, and each truss has 9 panels. Find the dead and live panel loads.

ART. 28. DEAD LOAD STRESSES.

The principle of the force polygon used in the last chapter for the determination of stresses in roof trusses may often be advantageously employed for the analysis of bridge trusses.

As an illustration let a through Pratt truss for a highway bridge be taken, having 8 panels, a span of 176 feet, and a depth of 26 feet. Let the bridge have a roadway 21 feet wide and two sidewalks each 6 feet wide. By the formula in Art. 27 the dead load per linear foot of bridge is found to be 1 627 pounds, and the dead panel load per truss is 8.95 short tons. It is required to determine the stresses due to this dead load, all being supposed to be on the lower chord.

In Fig. 54 let qy be laid off by scale equal to $8.95 \times 7 = 62.65$ tons, let it be divided carefully into 7 equal parts, lettered in

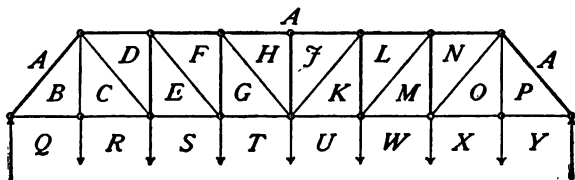


Fig. 53.

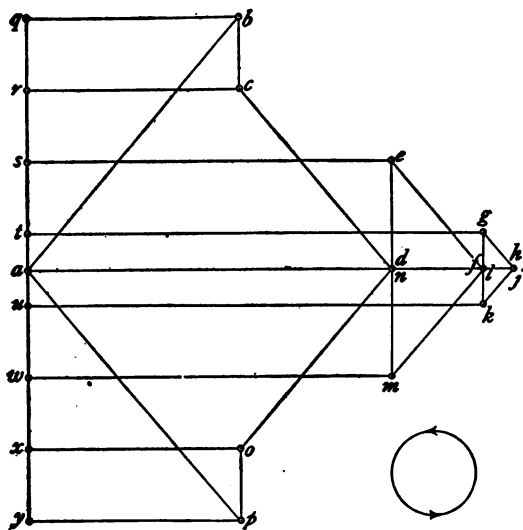


Fig. 54.

the manner indicated and bisected at a . The effective reactions are ya and aq , the half panel loads at the supports being omitted for convenience. At the left support the reaction AQ is held in equilibrium by the stresses in QB and BA , and by Art. 1 these will form the closed force triangle

triangle aqb . As aq acts in the direction from a to q the other forces must act in the same direction around the triangle, that is, from q to b and from b to a . Transferring these directions to the joint AQB the stress in QB acts away from the joint and is therefore tension, while the stress in BA acts toward the joint and is compression. The construction of the stress diagram is continued by passing to the joints alternately on the lower and upper chords until the middle of the truss is reached, then beginning at the right support and passing to the joints in the opposite direction until the diagram closes. If

accurately drawn the diagram will be symmetrical with respect to ah . The polygon $qrcb$ being a rectangle shows the tension in CB to be equal to the load QR , and the tension in RC to be equal to that in BQ . The rectangle $esad$ shows the stresses in AD and ES to be equal in magnitude, the former being compression and the latter tension as previously determined. Again, af equals gt for a similar reason. It is seen therefore that the stresses in any two chord members whose adjacent spaces are separated only by a vertical have the same magnitude.

The compression in the upper chord increases toward the middle of the truss, and the same is true of the tension in the lower chord. The diagonals are all in tension but AB , while the verticals are all in compression but BC . In the web members the stresses increase from the middle toward the ends of the truss, with the exception of BC , which only serves to transfer the load QR to the upper chord.

The following results were obtained from a stress diagram drawn to a scale of 8 tons to an inch :

TRUSS MEMBERS.	STRESSES.	TRUSS MEMBERS.	STRESSES.
	Tons.		Tons.
Upper chord	$\left\{ \begin{array}{l} AD \\ AF \\ AH \end{array} \right. \begin{array}{l} - 45.4 \\ - 56.8 \\ - 60.6 \end{array}$	Diagonals	$\left\{ \begin{array}{l} AB \\ CD \\ EF \\ GH \end{array} \right. \begin{array}{l} - 41.1 \\ + 29.3 \\ + 17.6 \\ + 5.9 \end{array}$
Lower chord	$\left\{ \begin{array}{l} BQ \\ CR \\ ES \\ GT \end{array} \right. \begin{array}{l} + 26.5 \\ + 26.5 \\ + 45.4 \\ + 56.8 \end{array}$	Verticals	$\left\{ \begin{array}{l} BC \\ DE \\ FG \\ HJ \end{array} \right. \begin{array}{l} + 9.0 \\ - 13.5 \\ - 4.5 \\ 0 \end{array}$

As a final check the stress in AH is computed thus :

$$31.325 \times 88 - 8.95(66 + 44 + 22) + AH \times 26 = 0,$$

whence $AH = -60.6$ tons.

If instead of concentrating all the dead load on the lower

chord, it be divided so that panel loads of 2.95 tons be applied on the upper chord and 6.0 tons on the lower, the stress diagram assumes the form shown in Fig. 56, the broken lines referring to stresses in the right half of the truss. The loads and

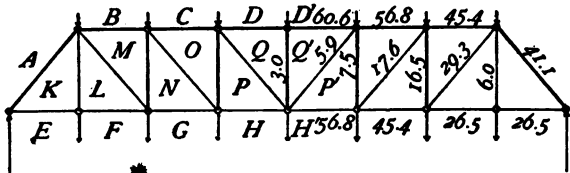


Fig. 55.

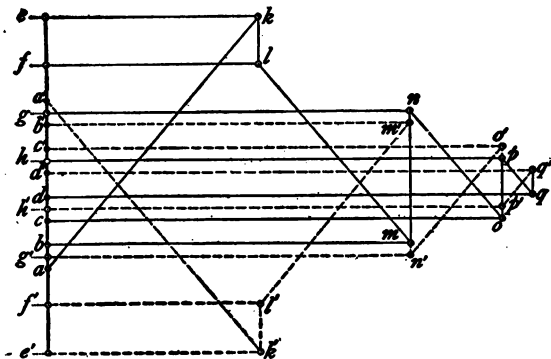


Fig. 56.

reactions are taken in regular order around the truss and laid off in succession on the load line. The lower panel loads are taken from left to right, then the right reaction followed by the panel loads on the upper chord from right to left, and finally the left reaction which closes the polygon. This polygon is $efghh'g'f'e'a'b'c'd'd'cbae$. The stresses obtained are marked on the right half of the truss diagram, compression being indicated by the heavy lines and tension by the light lines.

Comparing Fig. 56 with Fig. 54 it is observed that all the stresses are the same except those in the verticals whose compression is increased by 2.95 tons—the weight of the upper panel loads. The tension in KL is accordingly diminished by the same amount.

A further examination of Fig. 56 shows that the vertical component of ak is ae , the reaction; the vertical component of lm is $ae - ef - ba$; $mn = ae - ef - fg - ba$; and so on. Therefore the following principle is established:

ART. 29. LIVE LOAD STRESSES IN A WARREN TRUSS. 73

For trusses with horizontal chords the vertical component of the stress in any web member equals the reaction minus all the loads on the left, that is, equals the vertical shear for that member.

The only exception to this is the vertical KL for reasons already given in the first part of this article. The above principle may be derived from the relation existing between the stresses in any section of a truss and the external forces on either side of that section as demonstrated in Arts. 7 and 17.

The diagram also shows that the difference between the magnitudes of the stresses in any two chord members equals the sum of the horizontal components of the stresses in the web members situated between them. For instance, the difference between hp and gn is the horizontal component of no , which also equals the difference between co and gn or between ph and bm . The horizontal component of any diagonal is called a chord increment and forms the base of a right triangle whose height is the vertical shear in that diagonal. (Roofs and Bridges, Part I, Art. 26.)

Prob. 40. A through Pratt truss of a single track railroad bridge consists of 7 panels, each 23 feet 2 inches long and 25 feet deep. One-third of the dead load being on the upper chord, find the stresses in all the members.

ART. 29. LIVE LOAD STRESSES IN A WARREN TRUSS.

As every load placed upon a bridge truss produces compression in the upper chord and tension in the lower chord, the greatest chord stresses produced by a live load occur when every panel point of the chord supporting the floor beams is loaded. The chord stresses due to a uniform live load are hence obtained from a diagram exactly similar to that for a dead load applied only upon one chord. Hence the stress in any chord member, due to a uniform live load, bears the same

ratio to the dead load stress as that of the corresponding apex loads, and accordingly either stress may be derived from the other by using this constant ratio.

In order to investigate the effect of live load on the web members, let a deck Warren truss of 7 panels be taken, the span being 126 feet, the depth 12 feet, and the live load 1 700 pounds per linear foot per truss. The live panel load is then 15.3 tons.

Placing a panel load at apex 1 in Fig. 57, the stresses due to this single load are obtained by drawing Fig. 58 in the usual




Fig. 57.

manner. The reaction $a'k$ is one-seventh of the panel load. The stresses in the braces are found to be alternately compression and tension each way from the load, and on either side the stresses are the same in magnitude from the load to the support, their vertical components being equal to the reaction on that side.

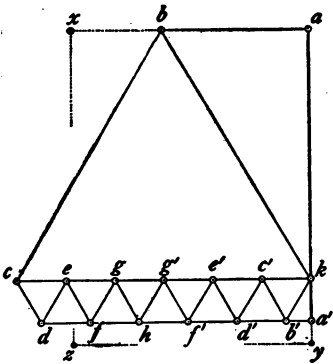


Fig. 58.

For a panel load at apex 2 the reaction of the right support will be twice as great as for the load at 1, and hence the stresses in all the braces on the right of apex 2 will also be twice as large; for a load at apex 3 the stresses on its right will be three times as great as for the load at 1, and so on. Again, a panel load at apex 6 will produce the same stresses on its left as the load at 1 caused on its right, and a load at 3 will produce stresses in the braces on its left equal to four times those due to the load at

6. The stress in each web member due to a single live panel load at any apex may therefore be obtained by taking a simple multiple of the stress for that member as given by Fig. 58.

In the following table the first and sixth lines are thus filled out directly with the results scaled off from the diagram (which was originally drawn to a scale of 5 tons to an inch), and the other lines by taking multiples of these as indicated above. The stresses in each column are then combined so as to give the greatest and least stresses and those due to a uniform live load throughout.

WEB MEMBERS.	<i>KB</i>	<i>BC</i>	<i>CD</i>	<i>DE</i>	<i>EF</i>	<i>FG</i>	<i>GH</i>
Live panel load at 1,	+16.38	-16.38	-2.73	+2.73	-2.73	+2.73	-2.73
2,	+13.65	-13.65	+13.65	-13.65	-5.46	+5.46	-5.46
3,	+10.92	-10.92	+10.92	-10.92	+10.92	-10.92	-8.19
4,	+8.19	-8.19	+8.19	-8.19	+8.19	-8.19	+8.19
5,	+5.46	-5.46	+5.46	-5.46	+5.46	-5.46	+5.46
6,	+2.73	-2.73	+2.73	-2.73	+2.73	-2.73	+2.73
Live load, greatest,	+57.33	-57.33	+40.95	-40.95	+27.30	-27.30	+16.35
Live load, least,	0	0	-2.73	+2.73	-8.19	+8.19	-16.35
Uniform live load,	+57.33	-57.33	+38.22	-38.22	+19.11	-19.11	0

It is found that for any given diagonal all the loads on one side of it cause one kind of stress, while those on the other side cause the opposite stress. The maximum stress is hence produced in a web member when the live load covers the larger segment of the span, and the minimum stress when the smaller segment is loaded.

In the construction of stress diagrams for a truss with horizontal chords and equal panels it is not necessary to draw the skeleton outline of the truss to a large scale. If in this example ax be laid off by the linear scale, equal to some convenient multiple of the half panel length and ay equal to the same multiple of the depth of truss, xy will give the direction of half

the web members, and in transferring this direction the triangle will require very little shifting along a straight edge, thus promoting accuracy. The line ay should be longer than ak . Completing the rectangle $xayz$, the direction of the remaining braces will be given by az .

The results in the line 'uniform live load' in the table should be the same as those derived from a stress diagram made for a live panel load at every panel point or apex, and may thus be checked. As such a diagram is required for the chord stresses it will also answer this purpose.

As the live load cannot act alone, but always in conjunction with the dead load, the stresses due to the combined loads are required. These are given in the following table. The dead apex load on the lower chord is 1.71 tons, and on the upper chord 3.42 tons. The dead load stresses were obtained from a diagram of 5 tons to an inch.

WEB MEMBERS.	KB	BC	CD	DE	EF	FG	GH
Live load, greatest,	+ 57.33	- 57.33	+ 40.95	- 40.95	+ 27.30	- 27.30	+ 16.35
Live load, least,	0	0	- 2.73	+ 2.73	- 8.19	+ 8.19	- 16.35
Dead load,	+ 20.35	- 18.18	+ 13.85	- 11.68	+ 7.44	- 5.34	+ 1.07
Maximum,	+ 77.68	- 75.51	+ 54.80	- 52.63	+ 34.74	- 32.64	+ 17.42
Minimum,	+ 20.35	- 18.18	+ 11.12	- 8.95	- 0.75	+ 2.85	- 15.28

The stresses due to the combined load are obtained by adding the dead load stresses to each of the corresponding live load stresses.

By comparing these results with the computations for the same example in Roofs and Bridges, Part I, Art. 34, it is seen that they are correct to or within one-tenth of a ton, which is sufficiently accurate for all purposes of design.

The same method of tabulation might be applied to the

chord stresses, but the diagram for a full live load can be made in less time.

Prob. 41. Find the maximum and minimum chord stresses for the above example.

ART. 30. LIVE LOAD STRESSES IN A PRATT TRUSS.

If a Pratt truss were built having only those diagonals which are strained under dead load it would be necessary that some of them resist the compression produced by certain positions of the live load. As, however, the diagonals are only to be subjected to tension this is prevented by inserting other diagonals inclined in the opposite direction. Panels having two diagonals are said to be counter-braced and the additional diagonals are called counter-ties or counter-braces. The main and counter brace in any panel cannot both be strained at the same time by any system of loading.

When the counter-ties are called into action by the live load the stresses in the adjacent verticals are different from what they would be provided the main braces could withstand compression. This can readily be seen by changing any diagonal and making the corresponding alteration in the stress diagram.

Let the Pratt truss whose dead load stresses were determined in Art. 28 be again considered. It consists of 8 panels each 22 feet long and 26 feet deep. The total width of the bridge, including sidewalks, is 33 feet. Taking the live load at 80 pounds per square foot of floor surface the panel load per truss is

$$\frac{1}{2} \times 22 \times 33 \times 80 = 29\,040 \text{ pounds} = 14.52 \text{ tons.}$$

The truss diagram, Fig. 59, is drawn with the diagonals all inclined one way, the main ones being on the left of the center and the counters on the right. Placing one live panel load RR at apex 1 the stress diagram, Fig. 60, is constructed which gives

all the stresses due to this load. Fig. 61 gives the stresses due to a live panel load at apex 7. After rr is laid off equal to the panel load of 14.52 tons, ru is marked off, by a suitable linear scale, equal to 26 feet and rt equal to 22 feet, then ut gives the inclination of the diagonals. Drawing rs parallel to ut it is found




Fig. 59.




Fig. 60.




Fig. 61.

to measure 19.02 tons. In both Fig. 60 and Fig. 61 the smaller vertical lines are one-eighth of the length of rr , or 1.82 tons, and the smaller diagonals are one-eighth as long as rs , or 2.38 tons. The only part of the stress diagrams actually required consists of the similar right triangles urt and rrs , and the line rs is to be carefully determined. Unless these triangles are very nearly of the same size, as in the above example, the latter should be made larger than the former.

The live load stresses are then tabulated as explained in Art. 29. The dead load stresses are obtained from Fig. 62, one-half of which is like the same part of Fig. 56, while the other half is changed so as to give the stresses when the counter-

braces alone are inserted in the right half of the truss as shown in Fig. 59. Two lines in this diagram are marked *hj*, the upper one measures 3.0 tons and represents the compression in *HJ* when the main ties act on each side of it (which occurs under a full live load), and the lower line meas-

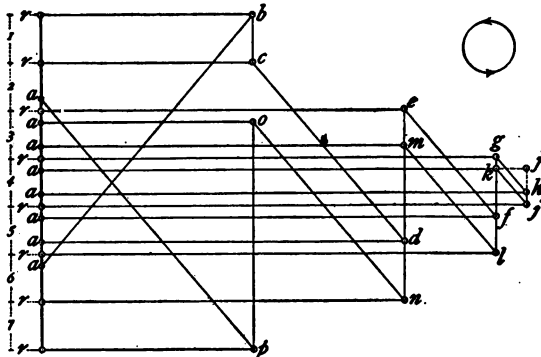


Fig. 62.

ures 1.5 tons being the tension in *HJ* when the main tie acts on the left and the counter-tie on the right, as indicated in the truss diagram.

All of the tabulated results except those in the last two lines of each table were obtained as if the web members in Fig. 59

TRUSS MEMBERS.	END POSTS.	MAIN TIES.			COUNTER-TIES.			
	<i>AB = PA</i>	<i>CD</i>	<i>EF</i>	<i>GH</i>	<i>JK</i>	<i>LM</i>	<i>NO</i>	
Live panel load at	1	- 16.7	- 2.4	- 2.4	- 2.4	- 2.4	- 2.4	
	2	- 14.3	+ 14.3	- 4.8	- 4.8	- 4.8	- 4.8	
	3	- 11.9	+ 11.9	+ 11.9	- 7.1	- 7.1	- 7.1	
	4	- 9.5	+ 9.5	+ 9.5	+ 9.5	- 9.5	- 9.5	
	5	- 7.1	+ 7.1	+ 7.1	+ 7.1	- 11.9	- 11.9	
	6	- 4.8	+ 4.8	+ 4.8	+ 4.8	+ 4.8	- 14.3	
	7	- 2.4	+ 2.4	+ 2.4	+ 2.4	+ 2.4	+ 2.4	
Uniform live load,		- 66.7	+ 47.6	+ 28.5	+ 9.5	- 9.5	- 28.5	- 47.6
+ Total,		0	+ 50.0	+ 35.7	+ 23.8	+ 14.3	+ 7.2	+ 2.4
- Total,		- 66.7	- 2.4	- 7.2	- 14.3	- 23.8	- 35.7	- 50.0
Dead load,		- 41.1	+ 29.3	+ 17.6	+ 5.9	- 5.9	- 17.6	- 29.3
Maximum,		- 107.8	+ 79.3	+ 53.3	+ 29.7	+ 8.4	0	0
Minimum,		- 41.1	+ 26.9	+ 10.4	0	0	0	0

TRUSS MEMBERS.		VERTICALS.						
		<i>BC</i>	<i>DE</i>	<i>FG</i>	<i>HJ</i>	<i>KL</i>	<i>MN</i>	<i>OP</i>
Live panel load at	1	+ 14.5	+ 1.8	+ 1.8	+ 1.8	+ 1.8	+ 1.8	+ 1.8
	2	o	+ 3.6	+ 3.6	+ 3.6	+ 3.6	+ 3.6	+ 3.6
	3	o	- 9.1	+ 5.5	+ 5.5	+ 5.5	+ 5.5	+ 5.5
	4	o	- 7.3	- 7.3	+ 7.3	+ 7.3	+ 7.3	+ 7.3
	5	o	- 5.5	- 5.5	- 5.5	+ 9.1	+ 9.1	+ 9.1
	6	o	- 3.6	- 3.6	- 3.6	- 3.6	+ 10.9	+ 10.9
	7	o	- 1.8	- 1.8	- 1.8	- 1.8	- 1.8	+ 12.7
Uniform live load,		+ 14.5	- 21.9	- 7.3	+ 7.3	+ 21.9	+ 36.4	+ 50.9
+ Total,		+ 14.5	+ 5.4	+ 10.9	+ 18.2	+ 27.3	+ 38.2	+ 50.9
- Total,		o	- 27.3	- 18.2	- 10.9	- 5.4	- 1.8	o
Dead load,		+ 6.0	- 16.5	- 7.5	[- 3.0] + 1.5	+ 10.5	+ 19.5	+ 28.5
Maximum,		+ 20.5	- 43.8	- 25.7	- 9.4
Minimum,		+ 6.0	- 11.1	- 3.0	- 3.0

could take either tension or compression. It is now required to find the actual maximum and minimum stresses due to the combined loads under the limitation that the diagonals can take only tension. To avoid repetition only those members are referred to in the following explanation whose treatment differs from that of the preceding article.

The minimum stress in *GH* is zero as the compression due to the live panel loads at 1, 2, and 3 is greater than its dead load tension. The maximum stress in the counter *JK* is $+ 14.3 - 5.9 = + 8.4$ tons; the minimum stress is zero since the dead load as well as the live panel loads at 1, 2, 3, and 4 tend to compress this member. A counter is therefore required in the fourth and fifth panels of the truss. The counters *LM* and *NO* are not theoretically required because the greatest tensile stress produced by the live load in each one is not sufficient to overcome the tendency of the dead load to compress the same. This is seen also from the fact that the minimum stresses in *CD* and *EF* are $+ 26.9$ and $+ 10.4$ tons respectively, which

implies that their dead load tension is not reduced to zero under the most unfavorable position of the live load.

In finding the maximum and minimum stresses in any vertical it is necessary to consider whether the adjacent diagonals shown in the truss diagram really act under the various conditions of loading. If it is found that they do not act, then the stresses given by the table for the vertical cannot occur.

The live panel loads at 3, 4, 5, 6, and 7 together with the dead load produce in DE the maximum compressive stress equal to $-27.3 - 16.5 = -43.8$ tons, provided the adjacent diagonals are in tension. Under the influence of these loads CD and EF are both found to be in tension, and hence the value just obtained is the required stress. The live loads at 1 and 2 acting in addition to the dead load produce the minimum stress of $+5.4 - 16.5 = -11.1$ tons for the same reason.

The minimum stress in FG is due to the live panel loads at 1, 2, and 3, which with the dead load give a stress of $+10.9 - 7.5 = +3.4$ tons, provided the adjacent diagonals EF and GH are in tension. These loads would cause a tension of 22.3 tons in EF and 8.4 tons compression in GH , but as GH cannot take compression the counter-tie in the same panel is brought into action. The stress of $+3.4$ tons in FG therefore cannot occur. When the main tie acts on its left and the counter on its right, the vertical simply supports the dead panel load on the top chord, hence the minimum stress in FG is -3.0 tons. In the same way the minimum stress in HJ is also found to be -3.0 tons. Under the live panel loads at 5, 6, and 7 with the dead load the diagonals GH and JK are strained, hence the stress of -10.9 tons in HJ must be added to that produced by the dead load, $+1.5$ tons, to give the maximum of -9.4 tons.

Passing to the verticals on the right of the center it is seen that the combination of loads which would give either the

maximum or the minimum stress according to the table will not produce tension in both of the adjacent diagonals, and accordingly no additional values can be inserted in the table. The maximum and minimum stresses for these verticals will be the same as for those on the left of the center. The tabulation for the verticals beyond HJ is also shown to be unnecessary as KL in Fig. 59 has no diagonal on its right, the counters LM and NO not being required.

The chord stresses are found in the same way as for dead load (Art. 28), only the main ties however being inserted in the truss diagram. The stresses in a Howe truss are determined in a similar manner to that employed for the Pratt truss, the diagonals in that case taking only compression.

The following important principles may now be stated, attention to which will materially reduce the work in solving other problems for either type of truss mentioned :

The maximum stress in any vertical or main diagonal is produced when the live load covers the larger segment of the span.

The maximum stress in any counter diagonal occurs when the live load covers the smaller segment of the span.

The minimum stresses in both diagonals of a counter-braced panel are zero.

The minimum stress in the diagonal of a panel not counter-braced is given when the live load covers the smaller segment of the span.

The minimum stress in any vertical adjacent to a counter diagonal equals the dead apex load on the upper chord of a Pratt truss or the lower chord of a Howe truss.

The minimum stress in a vertical not adjacent to a counter diagonal is produced when the live load covers the smaller segment of the span.

Prob. 42. A Howe truss of 12 panels for a through single track railroad bridge has a span of 123 feet and a depth of 15

feet. The dead load is 625 pounds per linear foot, one-third to be taken on the upper chord, and the uniform train load is 1 700 pounds per linear foot per truss. Find the maximum and minimum stresses.

ART. 31. SNOW LOAD STRESSES.

In addition to the dead and live load stresses must be considered those due to the snow and wind. The snow load for highway bridges is taken lower than for roofs since in the country it is not probable that the full live load would come on the bridge while a heavy fall of snow rests upon it, while in towns the sidewalks are generally cleared of snow. The snow load may vary from 20 to 0 pounds per square foot of floor surface depending upon the climate where the bridge is situated. As the floor of railroad bridges is open so that but little is retained no snow load is regarded.

As the snow load is uniform the stress diagram is exactly similar to that for dead load if the latter be taken only on the chord supporting the floor, or, like the diagram for a full live load. A separate diagram is hence not required as the stresses may be obtained from either of those mentioned by graphic multiplication, the same ratio existing between the stresses as that of the respective panel loads.

For the example in the preceding article the snow panel load is

$$\frac{1}{2} \times 21 \times 22 \times 15 = 3465 \text{ pounds} = 1.73 \text{ tons,}$$

for a load of 15 pounds per square foot of floor surface for the roadway only. The ratio of snow to uniform live load stresses is therefore $\frac{1.73}{14.52} = 0.119$. This gives a snow load stress of -8.0 tons in the end post AB , $+3.4$ tons in EF , -2.6 tons in DE , etc.

Prob. 43. A through Pratt truss for a highway bridge in a village has 12 panels each 11 feet long and 14 feet deep. The roadway is 18 feet 9 inches wide, and there are two side-walks each 5 feet wide. Find the stresses due to a snow load of 10 pounds per square foot.

ART. 32. WIND STRESSES.

The greatest stresses due to wind are produced when it blows horizontally at right angles to the line of the bridge. The surface exposed to wind action is usually taken as double the area of the side elevation of one truss. If this area be not known an approximate value may be obtained by taking as many square feet as there are linear feet in the skeleton outline of the truss. For railroad bridges the surface of the side of a train, taken at 10 square feet per linear foot of train, is added to the above. No similar addition is made for highway bridges as it is not probable that the live loads would cover them when the wind is blowing at its maximum rate.




Fig. 63.




Fig. 64.




Fig. 65.

The wind pressure is taken from 30 to 40 pounds per square foot and produces its maximum effect when acting like a live load. The wind load on the trusses is divided between the upper and lower lateral bracing while the wind load upon the train is all taken by the lateral bracing of those chords which support the floor. The lateral bracing is generally of the Pratt type, the floor beams acting as the normal struts in one of the systems.

For an example let the through Pratt truss highway bridge whose dimensions are given in Art. 28 be again taken. The

side elevation of the outline of the left half of the truss is shown in Fig. 64, the plan of the upper lateral bracing in Fig. 63, and that of the lower lateral bracing in Fig. 65. When the wind blows in the direction indicated by the arrows and moves from the right toward the left the diagonals drawn in full lines are strained and when it blows in the opposite direction the other set of diagonals is strained.




Fig. 66.

The approximate area exposed to wind action is,

$$176 + 132 + 7 \times 26 + 12 \times 34.1 = 889 \text{ square feet.}$$

Taking the wind pressure at 40 pounds per square foot the total wind load is

$$889 \times 40 = 35\,560 \text{ pounds} = 17.78 \text{ tons,}$$

and the wind panel load is

$$17.78 \div (6 + 8) = 1.27 \text{ tons.}$$

The chord stresses are determined for uniform wind load by means of Fig. 66 for the upper lateral bracing and from Fig. 67 for the lower system. Only one-half of each diagram is shown, the other half being symmetrical with it. When the wind blows in the opposite direction the chord stresses on each side of the bridge will exchange values.

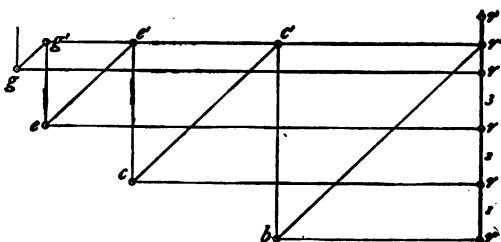


Fig. 67.

For the wind blowing in the direction of the arrows the diagrams give the following stresses in tons; for the upper chord,

AD	AF	AH	A'F'	A'H'
- 3.3	- 5.3	- 6.0	+ 3.3	+ 5.3

and for the lower chord,

<i>RB</i>	<i>RC</i>	<i>RE</i>	<i>RG</i>	<i>R'C'</i>	<i>R'E'</i>	<i>R'G'</i>
- 4.7	- 7.9	- 9.9	- 10.6	+ 4.7	+ 7.9	+ 9.9

In accordance with the simplified construction given in Art. 30 let a horizontal and a vertical line be drawn through *s* in Fig. 68. Let *st* be laid off equal to 21 feet and *su* equal to 22 feet, then *tus* will be the angle which the diagonals make with the chords. With a suitable scale of force let *sw* be made equal to 1.27 tons and *wx* drawn parallel to *tu*. Applying the scale to *wx* it is found to measure 1.84 tons. Dividing this value by 6 and 8, the number of panels in the upper and lower chords respectively, the quotients 0.31 and 0.23 tons are obtained which form the basis of the tabulations for the stresses in the diagonals. Dividing the panel load, 1.27 tons, by the same numbers the corresponding quotients 0.21 and 0.16 tons are found for the verticals. The following tables are now prepared:




Fig. 68.

For the upper lateral bracing,

	DIAGONALS.			STRUTS.			
	<i>DD'</i>	<i>FF'</i>	<i>HH'</i>	<i>DF'</i>	<i>FH'</i>	<i>HJ'</i>	
Wind panel load at	1	+ 1.55	- 1.05
	2	+ 1.24	+ 1.24	- 0.84	- 0.84
	3	+ 0.93	+ 0.93	+ 0.93	- 0.63	- 0.63	- 0.63
	4	+ 0.62	+ 0.62	+ 0.62	- 0.42	- 0.42	- 0.42
	5	+ 0.31	+ 0.31	+ 0.31	- 0.21	- 0.21	- 0.21
Maximum wind stresses		+ 4.7	+ 3.1	+ 1.9	- 3.2	- 2.1	- 1.3

and for the lower lateral bracing,

	DIAGONALS.				STRUTS.			
	<i>BB'</i>	<i>CC'</i>	<i>EE'</i>	<i>GG'</i>	<i>BC'</i>	<i>CE'</i>	<i>EG'</i>	<i>GK'</i>
Wind panel load at								
1	+ 1.61	- 1.12
2	+ 1.38	+ 1.38	- 0.96	- 0.96
3	+ 1.15	+ 1.15	+ 1.15	- 0.80	- 0.80	- 0.80
4	+ 0.92	+ 0.92	+ 0.92	+ 0.92	- 0.64	- 0.64	- 0.64	- 0.64
5	+ 0.69	+ 0.69	+ 0.69	+ 0.69	- 0.48	- 0.48	- 0.48	- 0.48
6	+ 0.46	+ 0.46	+ 0.46	+ 0.46	- 0.32	- 0.32	- 0.32	- 0.32
7	+ 0.23	+ 0.23	+ 0.23	+ 0.23	- 0.16	- 0.16	- 0.16	- 0.16
Maximum wind stresses	+ 6.4	+ 4.8	+ 3.5	+ 2.3	- 4.5	- 3.4	- 2.4	- 1.6

Both diagonals in the same panel have equal stresses due to wind. The minimum stresses in all the web members are zero. Since every panel is counter-braced only tensile stresses in the diagonals and compressive stresses in the struts need to be tabulated.

Prob. 44. A through single track railroad bridge has a span of 120 feet. Its trusses are of the Pratt type, have 6 panels, 21 feet deep, and are 16 feet apart between centers. Find the stresses due to a wind pressure of 40 pounds per square foot, provided only the wind pressure on the train be considered as a moving load.

ART. 33. STRESSES DUE TO INITIAL TENSION.

In trusses whose diagonals take only tension the counter-ties are made adjustable in order to be drawn up to a certain degree of tension when the bridge is unloaded. The stress thus introduced in these truss members is called initial tension, and serves to prevent the vibration of the diagonals in the counter-braced panels under moving loads and to stiffen the truss as a whole.

It is required to determine the stresses produced in other members of the truss when all the counters are subjected to a

given amount of initial tension. The number of counters in practice is larger than is theoretically required. As the stress in any counter is equivalent to two external forces, each equal to the initial tension, applied at the joints united by the counter-tie and acting toward each other, it may be replaced by them in this analysis.

In the Pratt truss considered in Arts. 28, 30, and 32 let the counters in the third, fourth, fifth, and sixth panels be each subject to an initial tension of 4 tons. The truss diagram is shown in Fig. 69, each of the external forces being equal to 4 tons.

In Fig. 70 let these external forces, taken in regular order around the truss, be laid off, thus forming the closed polygon $cdrd'c'g'h'hgc$. Since each pair of forces is in equilibrium the entire system is in equilibrium and hence there are no reactions at the supports. No forces being applied at any of the joints of the first panel the members drawn in broken lines may be omitted.




Fig. 70.

CHORDS.	STRESSES.	VERTICALS.	STRESSES.	MAIN TIES.	STRESSES.
CO and GN	- 2.6	MN	- 3.1	NO	+ 4.0
DQ and HP	- 2.6	OP and QQ'	- 6.1	PQ	+ 4.0

The stress diagram shows that the tension in any counter affects only the members of the panel to which it belongs. It produces compression in both chords equal to the horizontal

component of the initial tension, compression in the verticals equal to its vertical component, and tension in the main tie equal to that in the counter. The general effect is therefore to increase the stresses due to other loads in all the members of the counter-braced panels except the lower chord, whose stresses are diminished. In the upper and lower lateral bracing both diagonals in each panel are made adjustable.

It is not necessary to make stress diagrams for these lateral systems, but simply to draw a right triangle whose base is parallel to the chords and whose hypotenuse, measuring 4.0 tons, is parallel to one of the diagonals. Applying the scale the base is found to measure 2.9 tons and the perpendicular 2.8 tons. The stress in the chords is therefore -2.9 tons throughout; in the end struts -2.8 tons; in the remaining struts $2(-2.8) = -5.6$ tons; and in the diagonals $+4.0$ tons. When the struts are not normal to the chords it is best to construct the complete stress diagrams.

It has not been customary, however, to consider the stresses caused by initial tension in the counters except those in the main ties. An examination of the tables in the next article will show the relation which these stresses bear to the others and to the final maximum and minimum stresses.

Prob. 45. A through double-track railroad bridge 140 feet in span has Pratt trusses of 7 panels and 32 feet deep. The bridge is 28 feet wide between centers of chords. Find the stresses due to an initial tension of 5 tons in every counter of the trusses and lateral systems.

ART. 34. FINAL MAXIMUM AND MINIMUM STRESSES.

The final maximum and minimum stresses in any truss member are the extreme limits of stress to which it is subjected by all possible combinations of the dead, live, snow, and wind loads, and initial tension. The larger limit is called the maxi-

imum and the smaller the minimum stress, and they may have the same or opposite signs. In finding the maximum and minimum stresses in the following tables, it is assumed that the initial tension as well as the dead load is always acting. In practice the wind stresses in the chords are more frequently disregarded than taken into account.

In Art. 30 the maximum and minimum stresses due only to dead and live loads were found for the through Pratt truss whose stresses due to snow load were found in Art. 31, those due to wind load in Art. 32, and to initial tension in Art. 33. The various results are now brought together in the following table and the final maximum and minimum stresses obtained by addition. The members are designated as in Figs. 63, 64, and 65.

	UPPER CHORD.			LOWER CHORD.			
	AD	AF	AH	RB	RC	RE	RG
Dead load,	-45.4	-56.8	-60.6	+26.5	+26.5	+45.4	+56.8
Live load,	-73.7	-92.2	-98.3	+43.0	+43.0	+73.7	+92.2
Snow load,	-8.8	-11.0	-11.7	+5.1	+5.1	+8.8	+11.0
North wind,	-3.3	-5.3	-6.0	-4.7	-7.9	-9.9	-10.6
South wind,	0	+3.3	+5.3	0	+4.7	+7.9	+9.9
Initial tension—Truss,	0	-2.6	-2.6	0	0	-2.6	-2.6
—Lateral system,	-2.9	-2.9	-2.9	-2.9	-2.9	-2.9	-2.9
Maximum stress,	-134.1	-170.8	-182.1	+71.7	+76.4	+130.3	+164.4
Minimum stress,	-48.3	-59.0	-60.8	+18.9	+15.7	+30.0	+40.7

	END POST.	MAIN TIRES.			COUNTER-TIE.	VERTICALS.			
	AB	CD	EF	GH	GH	BC	DE	FG	HJ
Dead and live load max.,	-107.8	+79.3	+53.3	+29.7	+8.4	+20.5	-43.8	-25.7	-9.4
Dead and live load min.,	-41.1	+26.9	+10.4	0	0	+6.0	-11.1	-3.0	-3.0
Snow load,	-8.0	+5.7	+3.4	+1.1	0	+1.7	-2.6	-0.9	0
Initial tension,	0	0	+5.0	+5.0	+5.0	0	-3.1	-6.1	-6.1
Maximum stress,	-115.8	+85.0	+61.7	+35.8	+13.4	+22.2	-49.5	-32.7	-15.5
Minimum stress,	-41.1	+26.9	+15.4	+5.0	+5.0	+6.0	-14.2	-9.1	-9.1

	UPPER LATERAL BRACING.					
	DIAGONALS.			STRUTS.		
	<i>DD'</i>	<i>FF'</i>	<i>HH'</i>	<i>DF'</i>	<i>FH'</i>	<i>HJ'</i>
Wind,	+ 4.7	+ 3.1	+ 1.9	- 3.2	- 2.1	- 1.3
Initial tension,	+ 4.0	+ 4.0	+ 4.0	- 5.6	- 5.6	- 5.6
Maximum stress,	+ 8.7	+ 7.1	+ 5.9	- 8.8	- 7.8	- 6.9
Minimum stress,	+ 4.0	+ 4.0	+ 4.0	- 5.6	- 5.6	- 5.6

	LOWER LATERAL BRACING.							
	DIAGONALS.				STRUTS.			
	<i>BB'</i>	<i>CC'</i>	<i>EE'</i>	<i>GG'</i>	<i>BC'</i>	<i>CE'</i>	<i>EG'</i>	<i>GK'</i>
Wind,	+ 6.4	+ 4.8	+ 3.5	+ 2.3	- 4.5	- 3.4	- 2.4	- 1.6
Initial tension,	+ 4.0	+ 4.0	+ 4.0	+ 4.0	- 5.6	- 5.6	- 5.6	- 5.6
Maximum stress,	+ 10.4	+ 8.8	+ 7.5	+ 6.3	- 10.1	- 9.0	- 8.0	- 7.2
Minimum stress,	+ 4.0	+ 4.0	+ 4.0	+ 4.0	- 5.6	- 5.6	- 5.6	- 5.6

Prob. 46. Find the maximum and minimum stresses in the chords of the above example, provided the effect of the wind be disregarded. Also, compute the greatest percentage of reduction in the maximum stress of any chord member on this account.

ART. 35. THE BOWSTRING TRUSS.

This form of truss is shown in Figs. 71, 72, and 73, and is frequently used for highway bridges. The apex points of the upper chord lie upon the arc of a circle. When the bracing is arranged like that in Fig. 71, the diagonals take only tension, while the verticals take either tension or compression. In the truss in Fig. 73, all the web members are made to sustain either kind of stress. The same is true of the form given in Fig. 72, with the exception of the middle and end verticals, which are subject to tension only.

For example, let a truss like Fig. 71 be taken whose upper panel points lie in the arc of a circle. Let it have 8 panels,




FIG. 71.




FIG. 72.




FIG. 73.

each 14 feet long on the lower chord, with a depth at the center of 16 feet. The bridge has a roadway 22 feet wide and two side-walks each 5 feet wide.

The dead panel load is found to be 4.19 tons, of which 1.40 tons is to be taken on the upper chord and 2.79 tons on the




Fig. 74.

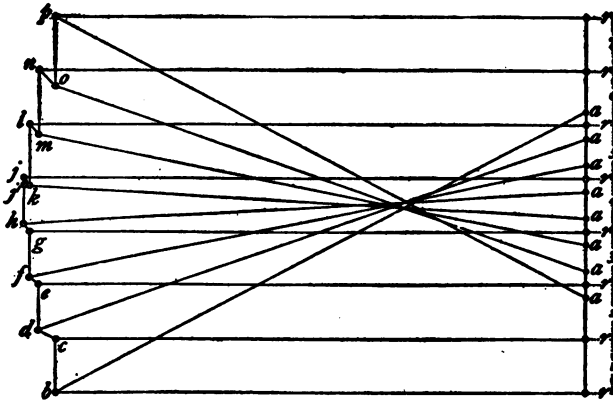


Fig. 75.

lower. The snow panel load is 1.68 tons. At 90 pounds per square foot of floor surface the live panel load is 10.08 tons, or 6 times the snow load.

Let a truss diagram be drawn as in Fig. 74, containing only the main diagonals in the left half and the counters in the right. The depths of the truss at the first, second, and third panel points are 7.32, 12.23, and 15.07 feet respectively. The stress diagram

obtained for dead load is shown in Fig. 75, that for a live panel load at apex 1 in Fig. 76, that for a live panel load at apex 7 in Fig. 77, and that for a uniform live load in Fig. 78. As a check upon the construction of these diagrams it is observed that in Figs. 75 and 78 bc and op are in the same

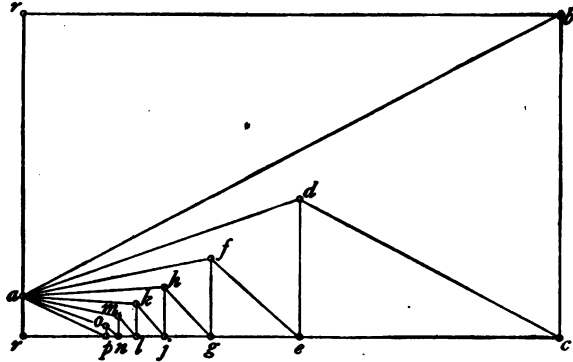


Fig. 76.

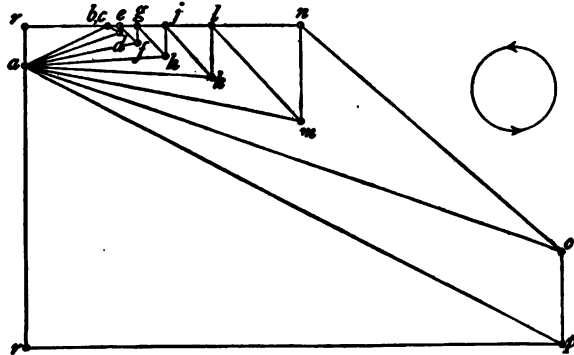


Fig. 77.

vertical line. The same is true of de and mn and of fg and kl . In general the lines representing stresses in verticals equally distant from the center of the truss lie in the same vertical line, or are equally distant from the load line. In Fig. 76 the line de is at the same distance from the load line as nm in Fig. 77, also nm in Fig. 76 and ed in Fig. 77 are similarly situated. The same relation exists between the lines representing stresses in any two verticals occupying symmetri-

cal positions in the truss. Again, if in Fig. 77 lk be produced to meet am and the intersection be called k' , then lk' will be equal to fg in Fig. 76 and nk' will be equal to fe in Fig. 76.

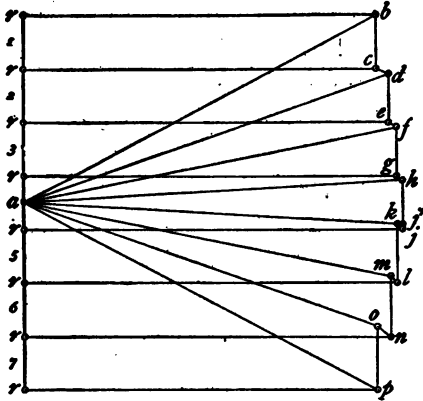


Fig. 78.

In Figs. 75 and 78 hj' represents the stress in HJ when the main diagonal is inserted on its right instead of the counter shown in Fig. 74, the point j' being at the intersection of the lines ak and hj . Only the stresses in web members

are scaled off from Figs. 76 and 77. The snow load stresses are obtained by dividing those due to uniform live load by six.

The stress diagrams from which the following results were obtained were drawn to the following scales: The dead load diagram, 4 tons to an inch; the diagrams for single live panel loads, 2 tons to an inch; and the uniform live load diagram, 10 tons to an inch.

The results expressed in tons are now tabulated as in Art. 30 and the maximum and minimum stresses obtained, the effect of wind and initial tension being omitted.

	UPPER CHORD.				LOWER CHORD.		
	<i>AB</i>	<i>AD</i>	<i>AF</i>	<i>AH</i>	<i>RB = RC</i>	<i>RE</i>	<i>RG</i>
Dead Load,	- 31.6	- 30.5	- 29.8	- 29.4	+ 28.0	+ 28.8	+ 29.2
Live Load,	- 76.1	- 73.2	- 71.5	- 70.6	+ 67.4	+ 69.1	+ 70.1
Snow Load,	- 12.7	- 12.2	- 11.9	- 11.8	+ 11.2	+ 11.5	+ 11.7
Maximum,	- 120.4	- 115.9	- 113.2	- 111.8	+ 106.6	+ 109.4	+ 111.0
Minimum,	- 31.6	- 30.5	- 29.8	- 29.4	+ 28.0	+ 28.8	+ 29.2

	MAIN DIAGONALS.			COUNTERS.		
	CD	EF	GH	JK	LM	NO
Live panel load at apex	1 - 9.3	- 5.8	- 2.1	- 1.4	- 0.9	- 0.6
	2 + 3.2	- 7.5	- 4.2	- 2.7	- 1.8	- 1.3
	3 + 2.7	+ 4.2	- 6.4	- 4.1	- 2.8	- 1.9
	4 + 2.1	+ 3.3	+ 5.2	- 5.4	- 3.7	- 2.5
	5 + 1.6	+ 2.5	+ 3.9	+ 6.6	- 4.6	- 3.2
	6 + 1.1	+ 1.7	+ 2.6	+ 4.4	+ 8.3	- 3.8
	7 + 0.5	+ 0.8	+ 1.3	+ 2.2	+ 4.1	+ 10.9
+ Total,	+ 11.2	+ 12.5	+ 13.0	+ 13.2	+ 12.4	+ 10.9
- Total,	- 9.3	- 11.3	- 12.7	- 13.6	- 13.8	- 13.3
Uniform live load,	+ 1.9	+ 1.2	+ 0.3	- 0.4	- 1.4	- 2.4
Dead load,	+ 0.8	+ 0.6	+ 0.2	- 0.2	- 0.6	- 1.0
Snow load,	+ 0.3	+ 0.2	+ 0.1	- 0.1	- 0.2	- 0.4
Maximum,	+ 12.3	+ 13.3	+ 13.3	+ 13.0	+ 11.8	+ 9.9
Minimum,	0	0	0	0	0	0

	VERTICALS.						
	BC	DE	FG	HJ	KL	MN	OP
Live panel load at apex	1 + 10.1	+ 4.3	+ 2.5	+ 1.6	+ 1.0	+ 0.7	+ 0.4
	2 0	+ 8.6	+ 4.9	+ 3.1	+ 2.0	+ 1.3	+ 0.8
	3 0	- 1.2	+ 7.3	+ 4.6	+ 3.1	+ 2.0	+ 1.2
	4 0	- 1.0	- 2.2	+ 6.2	+ 4.1	+ 2.7	+ 1.6
	5 0	- 0.7	- 1.6	- 2.9	+ 5.1	+ 3.4	+ 2.1
	6 0	- 0.5	- 1.1	- 1.9	- 3.3	+ 4.0	+ 2.5
	7 0	- 0.2	- 0.5	- 1.0	- 1.6	- 3.0	+ 2.9
+ Total,	+ 10.1	+ 12.9	+ 14.7	+ 15.5	+ 15.3	+ 14.1	+ 11.5
- Total,	0	- 3.6	- 5.4	- 5.8	- 4.9	- 3.0	0
Uniform live load,	+ 10.1	+ 9.3	+ 9.3	+ 9.7	+ 10.4	+ 11.1	+ 11.5
Dead load,	+ 2.8	+ 2.4	+ 2.4	+ 2.6	+ 3.0	+ 3.3	+ 3.4
Snow load,	+ 1.7	+ 1.5	+ 1.5	+ 1.6	+ 1.7	+ 1.9	+ 1.9
Maximum,	+ 14.6	+ 13.4	+ 13.2	+ 13.3	+ 12.1	+ 12.3	+ 14.4
Minimum,	+ 2.8	- 1.2	- 3.0	- 3.2	- 1.9	+ 0.3	+ 6.3

The student will have no difficulty in finding the maximum and minimum stresses in the chords and diagonals. It will be noticed that counters are required in every panel of this truss.

The application of the principles employed in Art. 30, for determining the maximum and minimum stresses in the

verticals of trusses with counterbraced panels may be further illustrated by finding those in DE . The greatest compression in this vertical is shown by the table to be due to the live panel loads 3 to 7 inclusive, combined with the dead load, giving a stress of $-3.6 + 2.4 = -1.2$ tons. This stress is a real one because the adjacent diagonals CD and EF shown in Fig. 74 are then acting, both of them receiving almost their maximum stress.

The tension of 12.9 tons given in the line marked ' + total ' when combined with that due to the dead and snow loads cannot actually occur because the adjacent diagonals are not brought into action by the corresponding loads. The greatest tension in DE will therefore occur under the full live, dead, and snow loads, unless one or more of the live panel loads on the right may be removed without causing either CD or EF to cease acting. If the live load be continuous, as it is customary to regard it, the live panel load 7 may be removed under the above conditions, and the corresponding stress will be $+9.3 + 2.4 + 1.5 - (-0.2) = +13.4$ tons. If the live panel loads 6 and 7 be removed, the diagonal EF ceases to act since its stress would become $+1.2 + 0.6 + 0.2 - (+1.7 + 0.8) = -0.5$ tons. Were it allowable to consider the live load as discontinuous, CD and EF would still be in tension after removing the live panel load 6 only, thus giving a stress in DE of $+9.3 + 2.4 + 1.5 - (-0.5) = +13.7$ tons.

In a similar manner the values of $+12.3$ and $+0.3$ tons are obtained for MN , and these are its maximum and minimum stresses under the condition that the adjacent counter ties LM and NO are both acting. On account of the symmetry of the truss the maximum and minimum stresses in DE have the same values provided the counter ties are acting in each adjacent panel.

Two more conditions for DE require attention. The first is that when the main diagonal acts on its right and the

counter on its left. The table indicates that this condition cannot exist under any combination of the given loads. The second condition occurs when the main tie acts on the left of *DE* and the counter on its right. This one is possible, and requires an additional tabulation.

The live panel load at apex 1 produces a tension in *DE* of 1.28 tons, and that at apex 7 of 0.43 ton. The former value is obtained from Fig. 76 by measuring the distance from *d* to the point where the vertical *de* meets *af* produced, while the latter is obtained from Fig. 77 by measuring the distance from *d* to the intersection of *af* with the vertical *de* produced. In the same way, Fig. 75 gives the corresponding dead load stress of + 2.8, and Fig. 78 (after dividing by six) the snow load stress of + 1.7 tons. From the stresses due to the live panel loads at 1 and 7 those produced by the loads at apexes 2 to 6 inclusive are found by the method used in the above tabulation to be + 2.6, + 2.1, + 1.7, + 1.3, and + 0.9, when expressed to the nearest tenth of a ton. Since all of these stresses are tension, it is clear that the maximum will be caused by the dead and snow loads combined with as many of the live panel loads as possible without bringing the main tie on the right of *DE* into action. The table for the diagonals indicates that this occurs when the live panel loads are placed at apexes 1 to 5 inclusive, and the resulting stress in *DE* is $+ 1.3 + 2.6 + 2.1 + 1.7 + 1.3 + 2.8 + 1.7 = + 13.5$ tons. If a similar tabulation were made for *MN* when the counter tie acts on its left and the main tie on its right, the same result of + 13.5 tons would be obtained.

On comparing the maximum stresses in *DE* under the three conditions above described and investigated, the last value obtained is seen to be the greatest in magnitude, and hence the true maximum to be used for both *DE* and the corresponding vertical *MN* in the other half of the truss. As the range of stress from this maximum of + 13.5 to - 1.2, the minimum in *DE*, is greater than to the minimum of + 0.3 in

MN , the true minimum stress to be used for both DE and MN is -1.2 tons.

The stresses in FG when the main tie acts on the left and the counter on the right are found to be $+0.8$, $+1.6$, $+2.4$, $+1.9$, $+1.4$, $+1.0$, and $+0.5$ for the live panel loads 1 to 7 inclusive, $+2.6$ for the dead load, and $+1.6$ tons for the snow load. The maximum occurs when the live load is at the apexes 1 to 6 inclusive, combined with the dead and snow loads, its value being $+13.3$ tons. On comparing this stress with the values given in the table for FG and KL , the true maximum for both of these verticals is seen to be $+13.3$ tons, and the greatest range of stress to the values of their minimum stresses shows that the true minimum for both verticals is -3.0 tons.

A similar tabulation might be made for HJ , but this is unnecessary since the main ties act on each side of it under the full load. The required stresses were obtained directly from Figs. 75 and 78 as previously explained, and are inserted in the table in brackets. The maximum and minimum stresses are caused by the full load. The largest tension which can occur in HJ when the main diagonal acts on the left and the counter on the right is 12.3 tons. The true maximum and minimum stresses of OP are equal to those of the vertical BC .

The form of truss shown in Fig. 79 is known as the lenticular truss and is also used for highway bridges. The panel points of the chords may lie on arcs of circles, but generally are placed on parabolas. The broken lines show the roadway and its connection to the trusses, the vertical end pieces being heavy posts and the others tension rods. In determining the stresses the same method is pursued as for the bowstring truss.




Fig. 79.

Prob. 47. A through bowstring truss has six panels each 15 feet long, the depth at the first and fifth panel points being 7.5 feet, at the second and fourth panel points 11.7 feet, and at the center 13 feet. The dead panel load is 2.5 tons and the live panel load 7.5 tons. Find the maximum and minimum stresses due to these loads only.

ART. 36. THE PARABOLIC BOWSTRING TRUSS.

When the panel points of the broken chord of a bowstring truss lie upon a parabola whose vertex is midway between the supports, the stress diagrams become simpler. Let a parabolic bowstring truss be taken with the same general dimensions and loads as given in the preceding article. In the diagrams like Figs. 75 and 78 the broken lines $bcd \dots nop$ become straight lines, and the points c and d , e and f , \dots n and o , coincide. This shows that under a uniform load the stress in the horizontal chord is the same throughout, the diagonals are not strained at all, and each vertical carries only the panel load on the horizontal chord. In the diagrams similar to Figs. 76 and 77, the points b , d , f , h , k , m , and o lie upon a straight line which intersects the load line produced at the shorter distance ar from r , thus checking the construction.

In the tabulated stresses for the webbing the sum of the '+ total' and the '- total' will give zero for the diagonals and + 10.08 for the verticals provided the work be done with the utmost precision. With diagrams like Figs. 76 and 77 made to a scale of 3 tons to an inch, the stresses obtained by tabulation for uniform live load averaged 0.05 tons in magnitude for the diagonals, three being tension and three compression, and those in the verticals varied on an average 0.01 tons from the true result, some being too large and others too small.

The final results in tons are given in the following table :

CHORDS.	MAXIMUM STRESSES.	MINIMUM STRESSES.	DIAGONALS.	MAXIMUM STRESSES.	VERTICALS.	MINIMUM STRESSES.
<i>AB</i>	- 124.9	- 32.8	<i>CD</i>	+ 9.9	<i>BC</i>	+ 2.8
<i>AD</i>	- 118.6	- 31.2	<i>EF</i>	+ 11.6	<i>DE</i>	- 0.4
<i>AF</i>	- 114.1	- 30.0	<i>GH</i>	+ 12.9	<i>FG</i>	- 2.3
<i>AH</i>	- 111.9	- 29.4	<i>JK</i>	+ 13.4	<i>HJ</i>	- 2.9
<i>RB</i>	+ 111.7	+ 29.3	<i>LM</i>	+ 12.9	<i>MN</i>	- 0.4
<i>RC</i>			<i>NO</i>	+ 11.6	<i>OP</i>	- 2.8
<i>RE</i>						
<i>RG</i>						

The minimum stresses in the diagonals are zero, and the maximum stress in each vertical equals

$$2.79 + 10.08 + 1.68 = 14.55 \text{ tons,}$$

or the sum of the dead, live, and snow panel loads.

If this truss were used as a deck bridge the maximum stresses in the verticals would be those given in the accompanying table, while the minimum stresses would equal the dead panel load on the horizontal chord, or - 2.79 tons. It will be observed that the differences between the minimum stresses in the verticals of the through truss and the maximum stresses in the same members of the deck truss equal twice the dead panel load plus the live and snow panel loads. The stresses in the remaining members are the same for a deck as for a through bridge except that the chord stresses change in character.

VERTICALS.	MAXIMUM STRESSES.
<i>BC and OP</i>	- 14.5
<i>DE and MN</i>	- 17.7
<i>FG and KL</i>	- 19.6
<i>HJ</i>	- 20.2

The properties of the parabola are such as to provide a very simple and abridged construction for obtaining directly the maximum and minimum stresses due to dead, live, and snow loads.

Let S be the stress in the horizontal chord due to the total uniform load W (including the half panel loads at the supports), l the span and d the depth of the truss at the center, then (Roofs and Bridges, Part I, Art. 39),


$$S = \frac{Wl}{8d}$$

Substituting for these terms their values for the truss considered above, the stress due to live load is

$$S = \frac{8 \times 10.08 \times 112}{8 \times 16} = 70.56 \text{ tons.}$$

Similarly the stress due to dead load is 29.33 tons and that due to snow load is 11.76 tons.

Now in Fig. 80 on the horizontal line ad with a scale of 4 or 5 tons to an inch, let ab be laid off equal to 29.33 tons, bc equal to

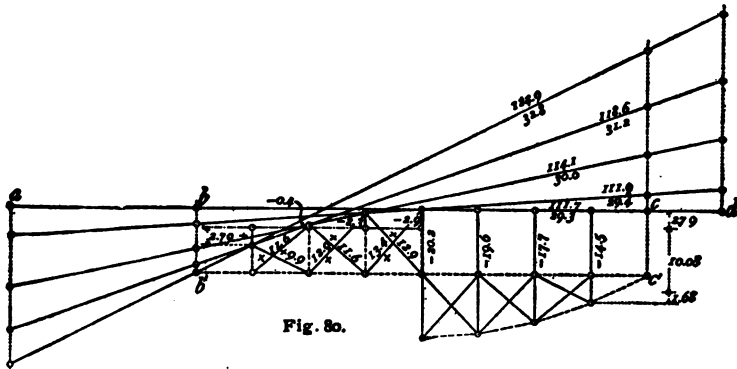

70.56 tons, cd equal to 11.76 tons, and verticals erected at each point of division. As the depth of the truss is one-seventh of its span let bb' and cc' be made equal to one-seventh of 70.56 or 10.08 tons, and on the span $b'c'$ let an outline diagram be drawn similar to the truss diagram. In the figure one-half is drawn as a through and the other half as a deck truss. By measuring the diagonals with the scale of force their maximum stresses are obtained. Their minimum stresses are zero.

Let the chord members be prolonged until they meet the verticals through a and d . Each of these lines is divided into three parts by the four verticals, these parts giving the stresses due to dead, live, and snow load respectively. For example, the dead load stress in the horizontal chord is represented by the part ab , the live load stress by bc , and the snow load stress by cd . The maximum stress in the same member is hence ad , or 111.7 tons, and the minimum stress is ab , or 29.3 tons.

On the through truss draw the horizontal broken and dotted base line 2.79 tons (the value of the dead panel load) above the first panel point on the upper chord. By measuring the verticals extending from this base line to each panel point on the upper chord, upward being compression and downward tension, the minimum stresses in the verticals are found. Their maximum stresses are each equal to the sum of the dead, live, and snow panel loads, or 14.55 tons.

On the deck truss let a similar base line be drawn 14.55 tons above the first panel point from the support on the lower chord, and the verticals measured from the panel points to the base line; thus are found the maximum stresses in the verticals, all of them being compression. Their minimum stresses are each equal to -2.79 tons. The measured stresses are marked on the different lines of the diagram.

Prob. 48. A deck parabolic bowstring truss of 10 panels has a span of 120 feet and a depth of 15 feet at the center. Find the maximum and minimum stresses for a dead panel load of 3 tons and a live panel load of 7 tons.

ART. 37. APPLICATION OF THE EQUILIBRIUM POLYGON.

In the preceding articles of this chapter the method of the force polygon has been employed exclusively. To illustrate the application of the equilibrium polygon in the determination

of stresses let the same example used in Art. 28 be taken, it being required to find the chord stresses, and afterward the web stresses due to the dead load. The span is 176 feet, the depth 26 feet, and the dead panel load 8.95 tons.

Let the truss diagram be drawn to a scale of 10 feet to an inch and the panel loads laid off successively on the load line *gy* in Fig. 81 to a scale of 10 tons to an inch (considerably re-

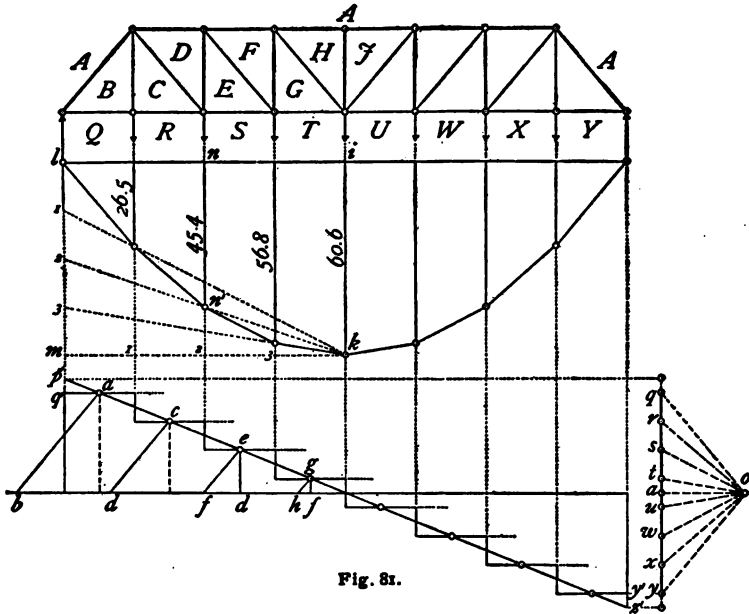


Fig. 81.

duced as here printed). The effective reactions are ya and aq , the load line being bisected at a . Let the pole o be taken on a horizontal through a , the pole distance H be made equal to 26 tons, and the equilibrium polygon constructed (Art. 6). The ordinates at the vertices of this polygon when measured by the linear scale and multiplied by H give the bending moments in tons-feet at the corresponding sections of the truss (Art. 7). The chord stresses are obtained by dividing these moments by 26 feet, the depth of the truss. For instance, the

ordinate nm' measures 45.4 feet, whence the stress in AD or ES is

$$\frac{45.4 \times 26}{26} = 45.4 \text{ tons.}$$

The stresses may therefore be directly obtained by measuring the ordinates with a scale of 10 tons to an inch, the results being marked on the diagram. Even with a smaller scale than that indicated above the same stresses, measured to tenths of a ton, are obtained as in Art. 28.

If the linear scale be 20 feet to an inch, and H be taken as 52 tons, the scale of tons remaining the same, the ordinates should be measured by a scale of $20 \times \frac{52}{26} = 40$ tons to an inch to obtain the chord stresses. Again, if H be laid off by the linear scale equal to double the depth of the truss, then the ordinates are to be measured by double the scale of force or 20 tons to an inch.

As the vertices of the equilibrium polygon lie upon a parabola whose vertex is at k , the ordinates may be obtained without drawing the equilibrium polygon. The chord stress at the center of a truss uniformly loaded is

$$S = \frac{Wl}{8d'}$$

in which W includes the half panel load at each support. Let the middle ordinate ik be made equal to

$$S = \frac{8 \times 8.95 \times 176}{8 \times 26} = 60.6 \text{ tons,}$$

let lm be made equal to ik and divided into the same number of parts as mk , in this case four. Drawing radial lines from k to these points of division their intersections with the corresponding verticals give the required points.

For an odd number of panels in a truss lm should be divided into as many parts as there are panels in the entire truss, only

the alternate points of division from l to m being used. For a uniform live load the same method may be employed as that here given, or the dead and live loads may be combined in one diagram.

The shear diagram for dead load is shown below the moment diagram in Fig. 81, the ordinates representing the vertical shear being limited by the line forming a series of steps from q' to y' . If the load were not concentrated at the panel points but uniform throughout the ordinates for shear would be measured to the straight line $p'z'$, which intersects the former at the center of each panel. The inclined line is the most convenient to use, but usually it is not employed, as the analytic method, consisting only of a few subtractions or additions, is more rapidly applied. The lines ab , cd , ef , and gh are the stresses in the diagonals, and de and fg in two of the verticals. To avoid confusing the diagram cd , ef and fg are turned toward the left, but have the same inclination as the diagonals of the truss. The stress in BC is one panel load, and that in HJ is zero. If 2.95 tons of the dead panel load be taken on the upper chord, a compression of that amount is to be added to each of the above stresses in the verticals.

In order to determine the maximum live load shear in any panel another shear diagram is necessary. On the horizontal axis AG in Fig. 82 let the positions of the panel loads be marked, and their magnitudes laid off on the load line ag . Let the pole o be placed in a horizontal line through the beginning of the load line, the pole distance made equal to the span of the truss by the linear scale and the equilibrium polygon $A'B'C' \dots H'$ constructed. Now let the span be so placed that its right support shall come at F , then every panel point from 3 to 7 inclusive is loaded. By Art. 29 this position of the load gives the maximum live load shear in EF or DE of Fig. 59. The ordinate $F'F''$ is equal to the reaction of the left support

and hence equals the vertical shear in the members named; for, the ordinate being contained between the sixth side of the equilibrium polygon and the first side produced measures the sum of the moments of all the loads between them with reference to the section through F' (Art. 7). Calling the value

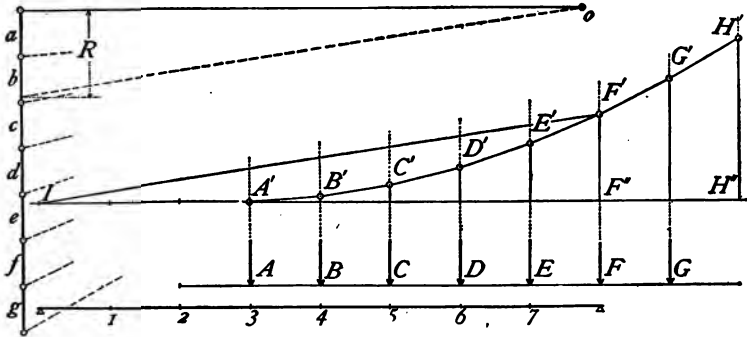


Fig. 82.

of the ordinate y , the sum of these moments equals $y \times H$. But the section at F' is at the right support of the truss, and hence the sum of the moments also equals the moment of the left reaction with reference to this support. Therefore

$$y \times H = R \times l,$$

and since H was made equal to l ,

$$y = R.$$

This may also be proved by drawing through the pole a parallel to the closing line $F'I$ of the equilibrium polygon forming a triangle which is equal to $IF'F''$ since one side is equal to its parallel IF'' and all the sides of both triangles are mutually parallel. $F'F''$ is hence equal to its parallel R .

The ordinates taken in succession from H' to A' measured by the scale of force give the maximum live load shears in each panel of the truss from left to right. The stresses in the diagonals are obtained from these shears in the manner indicated in Fig. 81. The results by this method are found to be

the same as those given in Art. 30 in the line '+ total' for the diagonals and in the line '- total' for the verticals.

For trusses with inclined chords the moment diagram gives only the horizontal component of any chord stress, the ordinate being measured in a section passing through the center of moments of the chord member. The shear diagram is not applicable in such cases except for the purpose of finding the reaction from which the stress in the required web member may be found by the method of the force polygon.

It will be observed by the student that the method of the equilibrium polygon does not indicate the character of the stresses as in the method of the force polygon. Whether a web member be in tension or compression is to be determined by cutting it by a plane, noting its direction and the sign of the shear, as was done in the analytic method in Part I, Art. 26.

Prob. 49. Find the maximum and minimum stresses due to dead and live loads for the truss in Prob. 42.

ART. 38. EXCESS LOADS.

It may be specified that a truss shall be designed to carry a given load extending over a certain distance in excess of the uniform live load. In a railroad bridge the excess load would represent the difference between the locomotive panel load and the uniform train panel load.

The chord stress due to a single load P distant x from the left support is a maximum at the load, and for any position of the load

$$S = \frac{M}{d} = \frac{P(l-x)x}{ld};$$

M being the bending moment at the load. If S be an ordinate corresponding to an abscissa x this is the equation of a parabola whose vertex is at the center of the truss. The middle

ordinate has a value of $\frac{Pl}{4d}$ and the ordinates are zero at each end. The ordinate at each panel point is the maximum stress in the chord member whose center of moments is at that point.

Although excess loads are not used in determining the stresses in highway bridge trusses, except for the floor system,




Fig. 83.

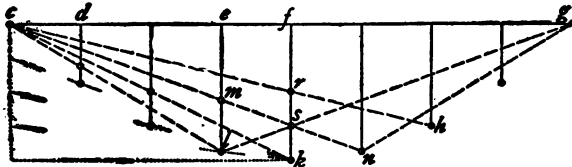


Fig. 84.

yet as an illustration of the method let the Pratt truss in Art. 30 be taken and the maximum chord stresses be found for one excess panel load of

5 tons. The ordinates in Fig. 84 are obtained as in the preceding article, the middle ordinate fk being

$$S = \frac{Pl}{4d} = \frac{5 \times 176}{4 \times 26} = 8.46 \text{ tons.}$$

The other ordinates on either side are 3.7, 6.4, and 7.9 tons.

Let it now be supposed that two excess loads of 5 tons each and 50 feet apart are specified. Let their distance apart be taken as 44 feet or two panel lengths. For two equal loads the maximum stress in a chord member in the left half of the truss occurs when one load is at the section passing through its center of moments and the other load is toward the right. For the member AF one load is to be placed at apex 3 and the other at 5. The stress in AF due to the load at 3 is el which measures 7.9 tons. The stresses for the load at 5 are given by the ordinates of the triangle cng , and since cn intersects el at m , the stress in AF due to this load is em , or 4.8 tons, and that

due to both loads is $7.9 + 4.8 = 12.7$ tons. In a similar manner the other chord stresses are found. The stress in AH may however be larger when the loads are at 3 and 5, than when at 4 and 6, being in this example $6.4 + 6.4 = 12.8$ tons for the former and $8.5 + 4.2 = 12.7$ tons for the latter position, f_s being 6.4 tons and f_r 4.2 tons.

By inspecting the table in Art. 30 it is seen that the maximum shear in any web member in the left half of the truss due to a single live panel load occurs when the load is placed at the nearest panel point on its right, the shear being equal to the left reaction. For a single excess load P the vertical shear is

$$V = R = \frac{P(l-x)}{l};$$

if V be an ordinate corresponding to an abscissa x this is the equation of a straight line. Thus, when $x = 0$, $V = P$ and when $x = l$, $V = 0$. From these data the diagram for maximum shear due to a rolling load may be readily drawn.

For the above example let the span ab be laid off in Fig. 85, marking the panel points as indicated and erecting verticals at

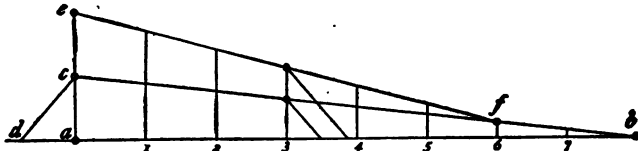


Fig. 85.

all of these points. Let ca be made equal to 5 tons by scale and cb joined, then the ordinates to this line give the maximum shear for each panel. The ordinate at 3 which measures 3.1 tons is the maximum shear in EF and DE and also the stress in DE . The stress in EF is given by a line drawn through the upper extremity of this ordinate with the same slope as EF and is found to be 4.1 tons. The stresses in all the diagonals may be obtained from $cd = 6.56$ tons by the use of a simple ratio which for EF is $\frac{4}{5}$ and for HG is $\frac{4}{3}$. These stresses may

also be obtained directly from the tabulation in Art. 30, by multiplying the greatest live load stress in any member due to a single panel load by the ratio of the excess load to the live panel load. For example, the stress in EF is $+ 11.9 \times \frac{5.0}{14.52} = + 4.1$ tons and that in DE is $- 9.1 \times \frac{5.0}{14.52} = - 3.1$ tons.

The same method might be applied to the chords, but would require more work than that used in this article.

For the two excess loads mentioned above the maximum stress in EF or DE is produced by placing one load at 3 and the other at 5. Let ce be drawn equal to $\frac{5}{8} \times 5$ tons and e joined with f which is on the line bc at a distance of two panels from b . The ordinates to the line efb give the maximum shears in each panel due to the two excess loads. The stress in DE is found to be 5.0 tons and in EF 6.6 tons.

The chord stresses are as follows,

	RB and RC	AD and RE	AF and RG	AH
First excess load,	3.7	6.4	7.9	8.5
Addition for second load,	2.6	4.2	4.8	—
Two excess loads,	6.3	10.6	12.7	$2 \times 6.4 = 12.8$

The stresses in the verticals are,

	BC	DE	FG	HJ	KL	MN	OP
First excess load,	+ 5.0	- 3.1	- 2.5	- 1.9	- 1.3	- 0.6	0
Addition for second load,	0	- 1.9	- 1.3	- 0.6	0	0	0
Two excess loads,	+ 5.0	- 5.0	- 3.8	- 2.5	- 1.3	- 0.6	0

and those in the diagonals are,

	AB	CD	EF	GH	JK	LM	NO
First excess load,	- 5.7	+ 4.9	+ 4.1	+ 3.3	+ 2.5	+ 1.6	+ 0.8
Addition for second load,	- 4.1	+ 3.3	+ 2.5	+ 1.6	+ 0.8	0	0
Two excess loads,	- 9.8	+ 8.2	+ 6.6	+ 4.9	+ 3.3	+ 1.6	+ 0.8

These results when combined with the stress given in Art. 34. will increase the maximum stresses in all the members and reduce some of the minimum stresses in the web members. The addition of the stresses in the web members due to excess loads should properly be made in the tables in Art. 30 by inserting a line above the dead load stresses and then obtaining the maximum and minimum stresses anew.

If one or more locomotive panel loads be required to precede the train on a railroad bridge, the maximum chord stresses in the left half of the truss will be obtained by placing the excess loads as near as possible to the left support.

Prob. 50. A Pratt truss for a deck single track railroad bridge has 6 panels each 13 feet 4 inches long and 13 feet 4 inches deep. Find the stresses due to one excess load of 6.5 tons per truss.

CHAPTER IV.

LOCOMOTIVE WHEEL LOADS.

ART. 39. STANDARD TYPICAL LOADS.

A uniform live load which is carried by the stringers and floor beams to the panel points of the trusses, giving uniform live panel loads throughout, is confined mainly to highway

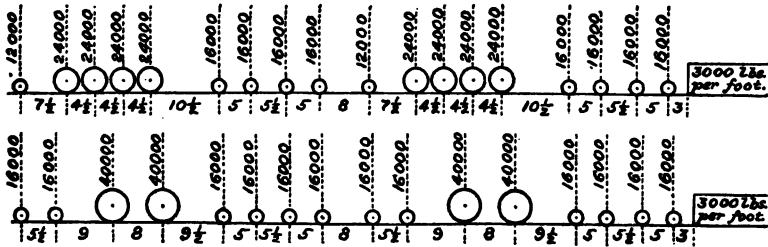


Fig. 86.

bridges. For railroad bridges it is generally specified that the live load shall consist of two coupled locomotives, followed by a uniform train load of a given weight per linear foot of track. The actual wheel loads thus taken constitute a system of concentrated loads whose relations remain unchanged to each other and to the uniform load following them while passing over the bridge.

The first of the diagrams in Fig. 86 represents two typical consolidation locomotives and the second the two typical passenger locomotives and train load specified in 1886 by the Pennsylvania Railroad. The numbers above the wheels show their weights in pounds for both rails of a single track and the numbers between them show their distances apart in feet.

A typical locomotive does not really exist, but is used so that the stresses due to it will be greater than those due to any locomotives that are likely to be built for some years in the future. Different railroads specify various typical locomotives and sometimes actual ones of the heaviest patterns. The typical locomotives shown in Fig. 86 are about the heaviest that have been employed for a number of years in designing




Fig. 87.

railroad bridges, while the two coupled consolidation locomotives and train shown in Fig. 87 were first specified in 1889 by the Lehigh Valley Railroad. The numbers between the wheels in Fig. 87 indicate inches.

For railroad bridges the "compromise standard system" of live loads recommended by WADDELL in 1893, after a discussion of the subject by many engineers, may be here noted as one which seems likely to be much used in the future. The typical consolidation locomotives are divided into seven classes, called T, U, V, etc., and the wheels in each class have the same spacing. Fig. 88 shows this spacing and the




Fig. 88.

loads for class T, while the loads for the other classes are given in the table. The student should always remember that the loads in the following table are for both rails of a single track and correspond in this respect to those given in Figs. 86 and 87. The distance from the front pilot wheel to the beginning of the uniform load is in all cases 104 feet,

and the loads are stated in pounds. Of course in designing a bridge the exact loads given in the specifications must be used, but it is hoped that engineers who write specifications will gradually abandon the awkward typical locomotives with wheels spaced apart at distances involving odd fractions of a

CLASS.	LOAD ON PILOT WHEEL.	LOAD ON EACH DRIVING WHEEL.	LOAD ON EACH WHEEL OF TENDER.	TOTAL WEIGHT OF ONE LOCOMOTIVE AND TENDER.	UNIFORM LOAD PER LINEAR FOOT.
Z	15 000	25 000	18 000	187 000	3 000
Y	16 000	28 000	19 000	204 000	3 200
X	17 000	31 000	20 000	221 000	3 400
W	18 000	34 000	21 000	238 000	3 600
V	19 000	37 000	22 000	255 000	3 800
U	20 000	40 000	23 000	272 000	4 000
T	21 000	43 000	24 000	289 000	4 200

foot, for surely this is straining at a precision unwarranted by actual conditions.

Alternate loads on two axles 7 feet apart are also specified for each class, the load on both rails of a single track for each axle being as follows: Class Z, 40 000; Y, 42 000; X, 44 000; W, 46 000; V, 48 000; U, 50 000; and T, 52 000 pounds. These loads represent the heavier drivers of the typical passenger locomotives, and apply only to beams of very short spans and to cross ties in the track on bridges.

Prob. 51. Find the maximum shear in an I beam 15 feet in span under the load represented in Fig. 87.

ART. 40. ANALYSIS OF A PLATE GIRDER.

To illustrate the method of determining the stresses when the live load consists of concentrated wheel loads, let a deck plate girder bridge for a single track railroad be taken, the span being 55 feet, measured between centers of bed plates, and the effective depth 5.5 feet. The total weight of both

girders and of the lateral bracing is 16.45 tons, and the floor system is estimated at 420 pounds per linear foot. The live load is to consist of one Lehigh Valley consolidation locomotive and tender followed by a uniform train load of 4000 pounds per linear foot. It is required to find the maximum flange stresses and the maximum shears throughout the girder due to the above loads.

The total dead load for each girder is first found to be,

$$\frac{1}{2} \left(\frac{420 \times 55}{2000} + 16.45 \right) = 14.0 \text{ tons,}$$

which is regarded as uniformly distributed. As this is a single track bridge the live load is divided by two, and for convenience the weights are reduced to tons.

On the axis AN , Plate III, and to a scale of 8 feet to an inch, are marked the positions of the wheel loads and the beginning, middle and end of a portion of the train 20 feet in length. Through these points indefinite verticals are drawn. On the load line hk , at the left of the plate, the wheel loads are laid off successively to a scale of 10 tons to an inch followed by 20 tons—the weight of the 20 linear feet of train. The pole o is chosen at a point above the middle of the load line, the pole distance being five times the depth of the girder, or 27.5 feet. It is not necessary to draw the rays from the pole, as the direction of each ray is determined by the pole and a point on the load line through which points the edge of the triangle is passed in the construction of the equilibrium polygon $A'B'FL'M'N'$. As the train load is not concentrated at its center but is uniformly distributed the required part $L'e'N'$ of the equilibrium polygon is a parabola tangent to $L'M'$ at L' and to $N'M'$ at N' (Art. 10). The construction is indicated on the diagram. The portion $A'B'$ of the polygon is a straight line parallel to ho and is produced as far as needed.

The left half of the girder is divided into five equal parts

each 5.5 feet in length, and the sections numbered as shown. After erasing the lines of action of the wheel loads above the equilibrium polygon, a series of verticals are drawn 5.5 feet apart. The two verticals each marked cc' are 55 feet apart and $c'e'$ is the closing side of the equilibrium polygon for the position cc of the girder. For this position the first driver stands at section 3 of the girder. The ordinate Pa' represents the flange stress at section 1 for this position of the load, the ordinate Qe' for section 2, and so on. The closing lines $a'a'$ to $g'g'$ are drawn, and all points on these lines distant one space from the left end are united by the curve PP , those distant two spaces from the left end by the curve QQ , those distant three spaces by RR , those distant four spaces by SS , and those distant five spaces by the curve TT . The ordinates between the polygon and the curve PP indicate the successive values of the flange stress at section 1 as the girder is moved from left to right with respect to the load, or, in other words, as the live load passes over the girder from right to left. The maximum ordinate between these lines is directly over the first driver, indicating that when the load is placed so that the first driver stands at section 1 it will give the maximum flange stress at that section. The maximum is always located at a vertex of the polygon, that is, at one of the loads. When the ordinate is not at an intersection through which the upper curve was drawn its length should be tested by drawing the closing line for the required position of the load. The pole distance H being five times the depth of the girder this ordinate must be measured with a scale five times that used on the load line or 50 tons to an inch. Applying the scale it is found to be 38.0 tons. The maximum ordinates to QQ and RR are 66.2 and 85.9 tons respectively, both being at the second driver; and the maximum ordinates to SS and TT are 97.0 and 99.6 tons, both being at the third driver.

The center of gravity of the locomotive and tender is 3

feet behind the third driver. When the load is so placed that the center of the girder is midway between these two points, only these loads being on the girder, the absolute maximum flange stress will occur in the section at the third driver. The section is therefore 1.5 feet from the center of the girder and the flange stress is 100.3 tons. The closing line for this position is shown near $c'c'$.

On an axis equal to the span in length and divided like the girder into ten parts the flange stresses just found are laid off as ordinates and a curve drawn through their upper extremities. Only one half is shown in the lower left side of the plate, the other half being symmetrical with it.

The diagram for flange stresses due to the dead load is now constructed below this axis by the method of Art. 35, and by measuring the ordinates the flange stress for the different sections of one-half of the girder are found to be 6.3, 11.2, 14.7, 16.8, and 17.5 tons respectively. These are to be added to the live load stresses in order to obtain the maximum stresses in the flanges.

To determine the maximum live load shears another equilibrium polygon $A''B''D''L''N''$ is drawn by taking a new pole distance equal to the span, and as it is convenient to have the first side $A''B''$ horizontal the pole o' is placed directly opposite h , the beginning of the load line. From the first driver at C'' the span is laid off toward the right extending to f and then successive positions ee , dd , etc., of the girder are marked when it is moved toward the left 5.5 feet at a time. The ordinates $f''z \dots d''d \dots a''a$ are the corresponding reactions of the left support (Art. 37) and those portions of the ordinates above the line uwz are the maximum shears at the sections. The line uw is parallel to ae , ua equals 4 tons—the load on the pilot wheel—and wz is a part of $B''C''$ produced, w being 55 feet distant from B'' . It is found that the maximum shear is caused

in each section when the leading driver stands at that section and the load covers the right segment of the girder. For instance, when the first driver is at section 5 the shear is $a''u$ or 13.6 tons, when the pilot is placed at 5 the shear, measured on the ordinate at the left of $a''u$, is 10.6 tons, and for the second driver at 5 the corresponding ordinate (not shown on the plate) is still smaller. When the first driver is at the left support the reaction and also the shear at the support are equal to $f''z$ or 45.0 tons, $f''z$ lying between the polygon and the second side $B''C''$ produced, since the pilot is beyond the girder (Arts. 7 and 35). The shears for the sections from 0 to 5 are 45.0, 38.0, 31.3, 24.9, 18.9, and 13.6 tons respectively. If shears are desired for intermediate sections they may be measured directly on the diagram.




The above shears may also be obtained from the moment diagram used for finding the flange stresses. When the first driver is at section 5 the closing line of the polygon is $a'a'$ and, drawing parallel to this a ray through o , it is found to cut off on the load line a reaction of 17.6 tons or a shear of 13.6 tons. The other rays shown are parallel to the closing lines $b'b'$ to $f'f'$. If one of the series of equidistant verticals did not coincide with the first driver another series of closing lines would have to be drawn to find the shears in this manner. The preceding method is usually the most economical in labor, but in this example the method just given has the advantage.

The shears due to dead load for the left half of the girder are given by the triangular shear diagram on the right of the lower end of the load line, and are to be added to the live load shears. Their values for the sections 0 to 5 are 7.0, 5.6, 4.2, 2.8, 1.4, and 0.0 tons.

Sometimes an approximate method is employed in which the pilot wheel is omitted from the system of loads. The differences between the true and the approximate shears in this

TRAIN LOADS.

DIME
 Deck gir
 Span, 55
 Weight of
 Floor sys
 Live load
 locom

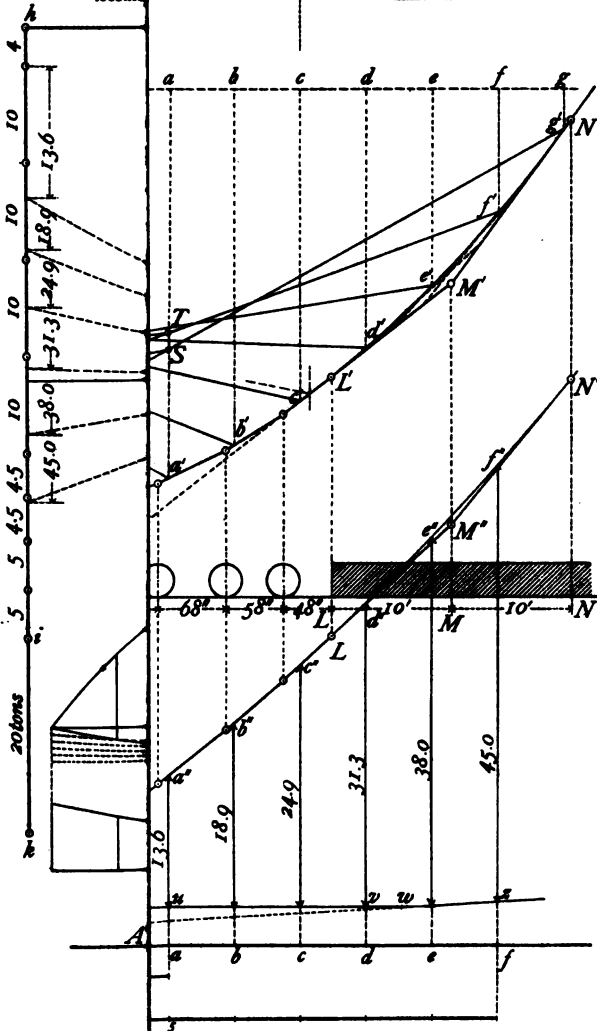

M.S.L.



example are indicated on the diagram by the ordinates between the lines uw and $C''w$.

In practice the equidistant verticals corresponding to the divisions of the girder are drawn upon a separate sheet of tracing paper that may be shifted horizontally over the one on which the equilibrium polygons are constructed. This facilitates some parts of the process very materially.

If two coupled locomotives be specified instead of ~~one~~ the maximum flange stresses will be somewhat greater, as in that case the drivers of the second locomotive when placed at the various sections give the positions for maximum moment. This may be seen from the fact that the straight line $B'A'$ will be replaced by a broken line starting from B' and bending upward, thus raising the left ends of a number of closing lines and consequently increasing the ordinates between them and the polygon.

Prob. 52. A plate girder for a single track bridge has a span of 31 feet 6 inches and a depth of four feet. Find the flange stresses and shears due to two coupled Pennsylvania consolidation locomotives.

ART. 41. ANALYSIS OF A PRATT TRUSS.

Let the example whose computations were made in Part I, Art. 63, be taken in order to compare the accuracy of the graphic method with the analytic method. The truss is a through Pratt for a double track railroad, of 140 feet span, having 7 panels, each 20 feet long and 24 feet deep. The dead load per linear foot is 1 400 pounds or 0.7 tons, and the live load a Pennsylvania typical passenger locomotive and tender followed by a uniform train load of 3 000 pounds or 1.5 tons per linear foot. Of the dead load 400 pounds per linear foot is to be taken on the upper chord.

As the construction required by this example (see Plate IV)

is in many respects similar to that in the preceding article, only those features which are different need explanation. The linear scale used on the original drawing was 10 feet to an inch, and the scale of force 20 tons to an inch. The pole distance is taken as twice the depth of the truss or 48 feet. The verticals above the equilibrium polygon are 10 feet or half a panel length apart, and the maximum ordinates for the sections through the panel points are drawn in heavy lines. The ordinates are measured by double the scale used in laying off the load line or 40 tons to an inch, and their values marked on the diagram. The maximum ordinate below the curve *SS*, drawn for the section through the fourth panel point, is smaller than that for the third, and is the last one required for the chord stresses.

If the Pennsylvania consolidated locomotive be used instead of the passenger locomotive, the maximum ordinates for the sections at 3 and 4 will be found at such positions as to place the engine beyond the bridge, and toward the right of these ordinates the stress curves will be parallel to the equilibrium polygon.

In the shear diagram on Plate IV the ordinates at d'' , b'' , etc., represent the reactions of the left support for various positions of the load since the pole distance $o'h$ is 140 feet, the length of the span. For instance, the left reaction when the first driver is at 2 is the ordinate below b'' which measures (by the scale of 20 tons to an inch) 79.2 tons. The shear in the second panel is this reaction minus that portion of the load on both pilot wheels carried by the stringers to the floor beam at 1, or 9.4 tons. Laying this off from b'' downward and drawing a line parallel to the diagonal CD the stress for that member is found to be 90.8 tons. If any other load be placed at 2 a smaller stress is found.

In the fifth panel the positive live load shear is a maximum when the second pilot wheel is at the panel point on the

right. The difference between the reaction and the shear is then 2.2 tons. The construction for two positions of the load is given for the fourth and fifth panels. The positive live load shear is a maximum in the sixth panel when the first pilot wheel is at panel point 6. The shear is then equal to the reaction, its value being 2.7 tons. The construction is omitted on the plate. The one shown is that due to the second pilot wheel at panel point 6.

The tension in the suspender BC is equal to that portion of the loads between 0 and 2 that is carried by the stringers to the floor beam at 1, such loads being brought on as to make it a maximum. This condition requires the drivers to be near 1. To determine this the small equilibrium polygon is drawn directly below the locomotive wheels using a pole distance equal to the panel length. The pole is o'' . When the first six wheels are so placed between 0 and 2 that their center of gravity is at 1, the reactions at 0 and 2 are each 16.7 tons, as given by the ordinate above the intersection of the outer sides produced (Arts. 7 and 37). The reaction at 1 is therefore $(8 + 8 + 20 - 16.7)2 = 38.6$ tons. The first driver is next placed at 1, thus moving the second tender wheel beyond 2, and the sides of the polygon are produced to meet the vertical under this load. The reaction at 1 is then $64 - (9.4 + 15.0) = 39.6$ tons. When the second driver is placed at 1 the reaction at 1 is $64 - (9.6 + 14.8) = 39.6$ tons. The greatest live-load tension in BC is therefore 39.6 tons.

It will be observed by the student that the ordinate of 9.4 tons under the first driver gives the amount that is laid off on five of the ordinates on the large shear diagram, while the small ordinate of 2.2 tons under the second pilot is deducted from three of them.

Another method of finding the stress in BC when the first driver is at 1 is shown on the diagram including the load line,

in which ot is parallel to the closing line $f'd'$ and ou is parallel to the closing line $f'h'$.

The stress diagram for dead load when the diagonals all incline one way is shown on the left of the shear diagram.

The stresses thus obtained are for the chords,

	<i>AD</i>	<i>AF and AH</i>	<i>RB and RC</i>	<i>RE</i>	<i>RG</i>
Dead load.....	- 58.3	- 70.0	+ 35.0	+ 58.3	+ 70.0
Live load.....	- 130.8	- 154.5	+ 81.8	+ 130.8	+ 153.5
Maximum.....	- 189.1	- 224.5	+ 116.8	+ 189.1	+ 223.5
Minimum.....	- 58.3	- 70.0	+ 35.0	+ 58.3	+ 70.0


for the diagonals,


	<i>AB</i>	<i>CD</i>	<i>EF</i>	<i>GH</i>	<i>JK</i>	<i>LM</i>
Dead load.....	- 54.7	+ 36.5	+ 18.2	0	- 18.2	- 36.5
Live load on right..	- 127.8	+ 90.8	+ 59.4	+ 33.5	+ 15.2	+ 3.5
Live load on left...	0	- 3.5	- 15.2	- 33.5	- 59.4	- 90.8
Maximum.....	- 182.5	+ 127.3	+ 77.6	+ 33.5	0	0
Minimum.....	- 54.7	+ 33.0	+ 3.0	0	0	0

and for the verticals,

	<i>BC</i>	<i>DE</i>	<i>FG</i>	<i>HJ</i>	<i>KL</i>
Dead load.....	+ 10.0	- 18.0	- 4.0	+ 10.0	+ 24.0
Live load.....	+ 39.6	- 45.6	- 25.8	- 11.7	- 2.7
Maximum.....	+ 49.6	- 63.6	- 29.8
Minimum.....	+ 10.0	- 6.3	- 4.0

The live load stress in AH is $- 154.5$, and that in RG is $+ 153.5$ tons, because under the loads which cause both chord stresses of these magnitudes combined with the dead load the shear in the middle panel is negative, thus bringing into action the diagonal which slopes downward toward the

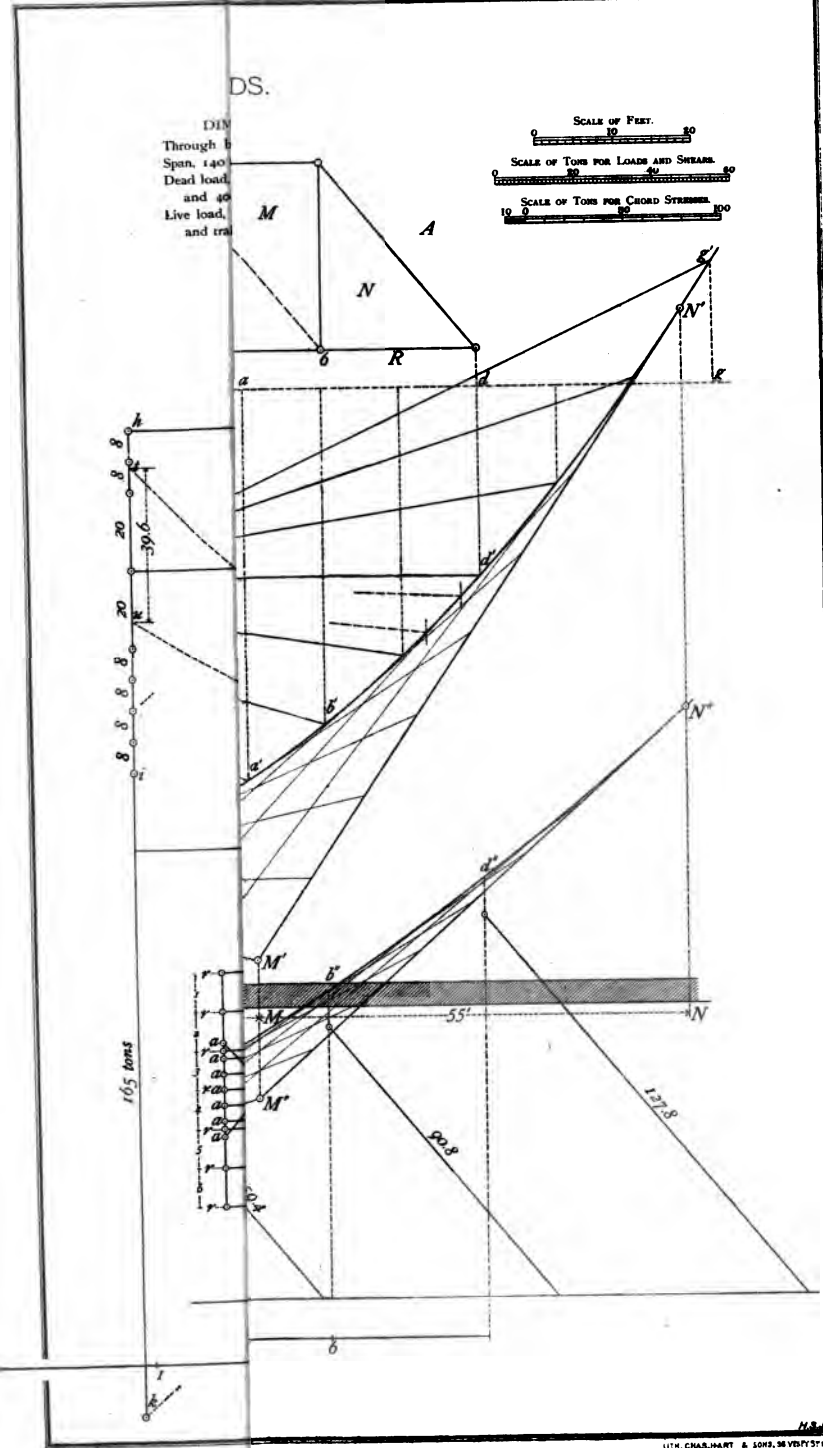



left. As, however, the dead load shear is zero, its sign depends only on the live load and may therefore be most readily determined by drawing the corresponding closing lines on the moment diagram on Plate IV and observing the relative lengths of the ordinates at panel points 3 and 4, as explained in Art. 9. In both cases the ordinate at panel point 3 was found to be the greater. In practice the larger of the two values is often used for both chords of the middle panel.

The maximum and minimum stresses are found in the manner explained in Art. 30. The table shows that theoretically only the middle panel needs to be counterbraced, but practically counters would be inserted in the third and fifth panels to provide for some loads which might be allowed to cross the bridge before it would become necessary to replace the structure on account of the permanent increase in the weight of locomotives and trains demanded by the regular traffic.

As no counter tie is called into action in the third panel by the specified loads, the minimum stress in the vertical DE is shown to be $-18.0 + 11.7 = -6.3$ tons, because the live load stress in DE when the load comes from the right is equal in magnitude and opposite in sign to that in HJ (which equals the shear in JK) for the live load coming on the bridge from the right. Had the counter JK been required, then the minimum stress in DE would have been the dead panel load on the upper chord, or -4.0 tons. The stresses in HJ and KL given in the table are not real, as the adjacent counters JK and LM never act under the given loads.

On comparing these results with those obtained by the analytic method it is seen that the average difference between them is about 0.1 ton, the only difference exceeding this amount being 0.3 ton for the chord members AD and RE , the value obtained by computation being 131.1 tons. The

analytic method, however, gives another position of the live load which also satisfies the condition for the greatest stress in these chord members, namely, when the second driver stands at 2. The computed stress for the position is 130.3 tons. Two computations are also required for the stresses in $RB = RC$ and in GH .

Prob. 53. A through Pratt truss for a single track railroad bridge has 7 panels each 21 feet 6 inches long and 26 feet deep. The trusses are 14 feet 8 inches apart center to center of chords. The dead panel load is 1.93 tons on the upper and 6.33 tons on the lower chord. The live load is to consist of two coupled Lehigh Valley consolidation locomotives followed by a uniform load of 4 000 pounds per linear foot. Find the maximum and minimum stresses.

ART. 42. MOMENTS IN PLATE GIRDERS.

In Art. 40 the equilibrium polygon was drawn with a pole distance equal to a multiple of the depth of the girder, making it possible to read the values of the flange stresses directly from the diagram with the scale. This is convenient for a single example, but if a number of girders are to be analyzed for the same live load it will economize labor to plot the equilibrium polygon on a sheet of profile paper by laying off the moment ordinates under each wheel as taken from a tabulation diagram similar to the one shown in Part I, Art. 62. Such an equilibrium polygon, or wheel load moment diagram, is shown in the line $ABC'D'$ in Fig. 89. The first side AB is horizontal, and coincides with the axis AX . The total ordinate at any point represents the sum of the moments of all the wheels on the left of the point with reference to the point as a center of moments. If the side lying directly under the pilot (indicated by two sides of a triangle) of the second locomotive be produced to meet the ordinate at C' ,

the portion of the ordinate above this line represents the moment of the entire second locomotive about the head of the train, while the portion below the side produced represents the moment of the first locomotive about the same

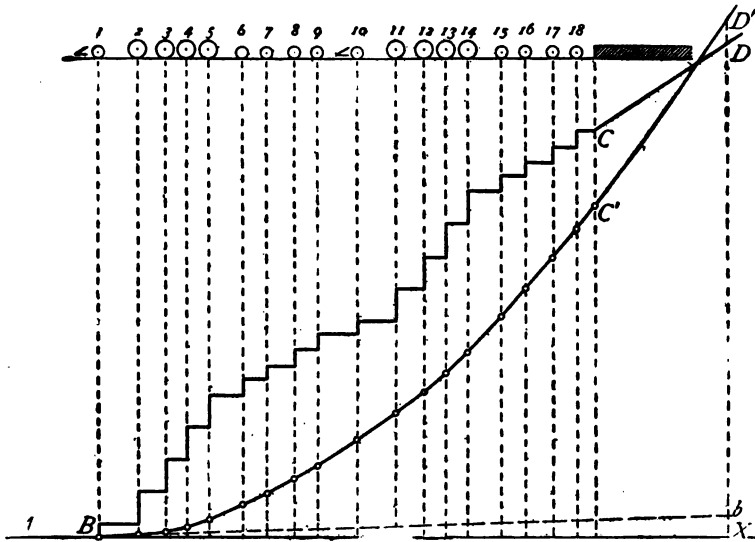


Fig. 89.

point, the values of these moments being read off directly from the sheet with its engraved scale (see Art. 7). As large a scale of moments should be adopted as possible without making the sheet too unwieldy to handle conveniently.

In the same article the maximum flange stress for any given section was obtained by practically finding the stresses for many different positions of the live load and selecting the largest one. If the position of the load which produces the maximum moment, and therefore the maximum flange stress, could first be determined, it would be necessary to find the value of only one moment for each section. This will now be done.

The criterion for the position of the wheel loads which

produces the maximum moment at any section of a girder which supports the load directly, is

$$P' = \frac{l'}{l} W,$$

in which W is the whole load on the girder, P' the part of the load on the left of the section, l' the distance from the section to the left support, and l the span. This formula may be deduced in a similar manner to those in Part I, Art. 61. It is really the same formula as that which applies to vertical sections through the panel points of trusses with vertical posts, and to the panel points of the loaded chord of those with inclined web members. In plate girders with stringers and floor beams the criterion applies only to the sections at the floor beams. If the cross ties rest directly on the girder, or if a solid metal floor is adopted which is supported at points very close together like the cross ties, the load is regarded as supported directly, and the above formula may be applied at any vertical section whatever.

To use this criterion let a load line $ABCD$, composed of a series of steps, be constructed on the same sheet as the wheel load moment diagram, as shown in Fig. 89. The rise in any step indicates the weight and the position of the corresponding wheel. Any ordinate to this load line gives the sum of all the loads on its left, and its value can be read off directly.

On a sheet of tracing paper let the span ab of the girder be laid off to exactly the same linear scale as that of the profile paper containing the load line and moment diagram, and let the half span be divided into the required number of equal parts and indefinite ordinates erected at these points. Fig. 90 shows the completed diagram for a span of 80 feet placed in position on the load line. The live load used in this example is given in Fig. 87.

It is very important that when the base lines of the two

diagrams coincide, their ordinates shall be truly parallel. The sections are five feet apart and the 20-foot section is made to coincide with wheel 4. If this be the proper position for

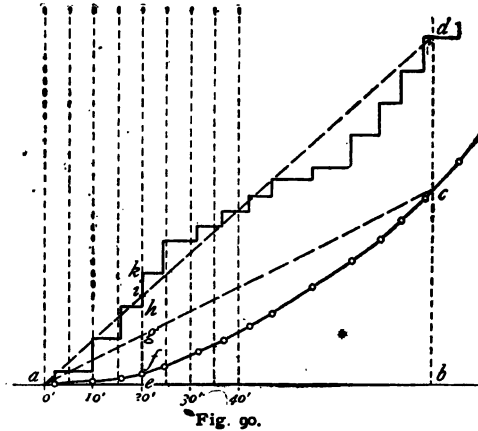


Fig. 90.

the maximum moment in the 20-foot section, the equation $P' = \frac{l'}{l}W$ must be satisfied. Remembering that the horizontal axis on the left of a is to be considered as a part of the load line, connect by a straight line the points a and d where the ordinates at the supports intersect the load line. Now the ordinate bd equals W , ab equals l , ae equals l' , and hence $W \frac{l'}{l}$ is represented by the ordinate ei . If the wheel 4 is just on the right of the section the ordinate eh represents P' , if just on the left the ordinate ek is the load P' ; and when it is at the section the load P' may be regarded as having any value between these limits. The condition is therefore satisfied, and this position will give the maximum moment at section 20'. All the possible positions for all the sections can be determined in a few minutes, by using a small silk thread, shifting the tracing paper in each case so as to bring a wheel over the section, stretching the thread as indi-

cated above and noting whether it intersects that wheel on the load line. The graphical method of determining position by means of a load line was first published by WARD BALDWIN in Engineering News, Vol. XXII, pages 295 and 345. See also letter of Dec. 11, 1889, on page 615.

By remembering the condition of loading required for uniform and excess loads, it is clear that the wheel loads should at first be approximately placed so as to cover the entire girder, and then if most of the drivers are on the left of the section the load should be moved somewhat toward the right. If by running off some light wheels on one end heavier ones may be brought on the girder at the other end without removing the drivers much farther from the section, the moment may probably be increased. By such considerations the labor of determining position may be reduced.

The value of the maximum bending moment at section 20' may now be obtained by drawing the closing line and measuring the ordinate fg . A scale consisting of a separate strip of profile paper cut from the same sheet is convenient for this purpose. If the left end a of the closing line were always on the axis ab , greater precision would be attained by reading the moment bc , multiplying it by the ratio $l' \div l$, which in this example is one-fourth, and subtracting the moment ef , which is known and usually marked on the diagram. In plate girders, however, a is frequently not on the axis. In the above girder the positions satisfying the criterion for the various sections were found to be as follows:

Section.	Wheel at Section.	Section.	Wheel at Section.
5'	2, 3	25'	4, 12, 13
10'	2, 3, 4	30'	12, 13
15'	3, 4	35'	12, 13
20'	4, 12	40'	4, 5, 8, 9, 10, 12, 13

It is therefore better to make the scale large enough to insure the requisite precision when the ordinates are read off directly

by a separate scale so that only one value needs to be recorded. Where more than one position satisfies the condition, the use of the dividers will show which is the largest, and its value alone needs to be carefully read and recorded. In order to enable a large vertical scale to be used on the width of an ordinary sheet of profile paper, the equilibrium polygon, or moment diagram, was consolidated as shown in Fig. 91. In this way the vertical divisions on profile paper, plate B, which measure a little more than 0.8 inch, could be taken as 500 thousand pound-feet instead of 1000 thousand pound-feet

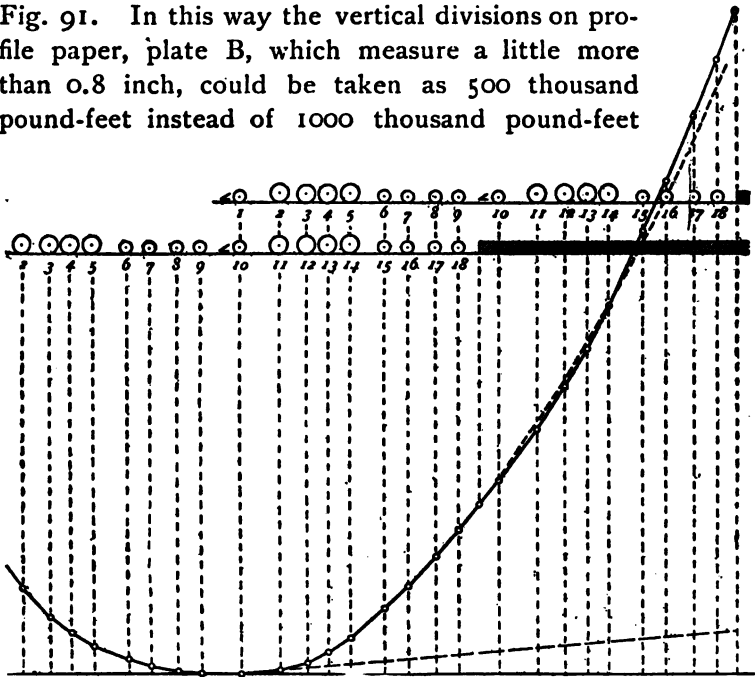


Fig. 91.

as before. The linear scale used was 4 feet to an inch, the actual working diagrams being therefore about ten times as large as those here given.

By reference to the above table of positions it is seen that the ordinates to be measured lie in the left half of the diagram so that acute intersections of the ordinates with the polygon are avoided. If this diagram were not also to be used for

obtaining shears, a further improvement would be made by inclining the axis downward towards the right, thus bringing the closing lines more nearly horizontal.

Referring again to Fig. 90 in order to call attention to the relation between the analytic and graphic methods, it should be observed that if no load is off the girder at the left, the ordinate eg is the moment of the reaction while ef is the moment of the loads on the left of the section, the center of moments being at some point in the section. If, however, some loads have passed beyond the left support, then the corresponding point e will lie on that side of the equilibrium polygon produced which is intersected by the vertical at the left support.

In plotting the load line and the equilibrium polygon the values generally used in practice correspond to the weights on one rail only, since single track bridges are so much more numerous than those with a double track. As it is customary to mark the stresses in pounds on stress sheets, it is preferable to plot the weights in units of 1000 pounds and the moments in units of 1000 pound-feet.

If a plate girder has floor beams and stringers, its bending moment diagram for the live load, corresponding to that shown above the axis in the lower left corner of Plate III, will be bounded by irregular curves between the moment ordinates at the floor beams, or panel points. These curves may be concave as well as convex, and may be replaced by right lines for all practical purposes. The more precise determination of intermediate moments will be treated in Art. 56.

An accurate representation of the dead load bending moment diagram consists of two parts, one due to the weight of the floor system, which is concentrated at the panel points and which may be plotted above the axis; the other due to the uniformly distributed weight of the girder itself. Fig.

92 shows the moment diagrams of a through plate girder whose span is 80 feet, and whose floor system has five panels.

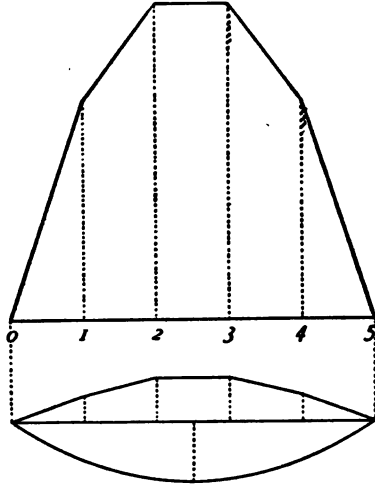


Fig. 92.

The upper diagram gives the moments due to live load, and the lower one those due to the dead load.

Prob. 54. Construct the diagrams described in this article, check the positions given in the table, find which position gives the maximum moment at each section and the values of these moments.

ART. 43.. SHEARS IN PLATE GIRDERS.

In Art. 40 it was shown that the maximum shear in any section occurs when one of the wheels at the head of the locomotive is at the section. If M' be the moment of all the loads on the girder about the right support when wheel 1 is at the section and M'' when wheel 2 is at the section, the corresponding values of the vertical shear are

$$V_1 = \frac{M'}{l}, \quad \text{and} \quad V_2 = \frac{M''}{l} - P_1,$$

P_1 being the weight of wheel 1. If the load is directly

supported by the girder there will be some section where the shear due to both positions is equal. Equating these values and transposing,

$$M'' - M' = P_1 l.$$

In Fig. 93 let cd be the moment M'' and ab the moment M' . The distance ac between these moment ordinates is

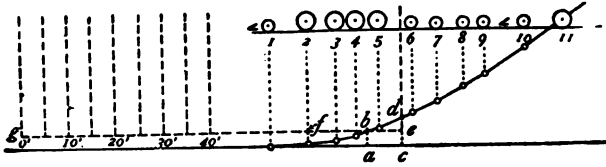


Fig. 93.

equal to the distance between wheels 1 and 2. If $V_1 = V_2$, $de = cd - ab = M'' - M' = P_1 l$. The position of the section where $V_1 = V_2$ may then be found as follows: Place the girder diagram (constructed on the tracing paper as described in the preceding Article) on the locomotive moment diagram (Fig. 89) with its left support at wheel 1, and mark on its section or ordinate at the right support the distance to the line Bb , which is the side of the equilibrium polygon on the right of wheel 1 produced. This is $P_1 l$ (Art. 7). Move the former diagram to the left until the section at the right support is at wheel 2, and mark the position of wheel 1. The two points marked are shown in Fig. 93, at d and b , respectively. Now move the tracing with the point d remaining on the equilibrium polygon and with its axis horizontal until a position is reached where b is also on the polygon. Mark the position of wheel 2 at f . It is easily remembered what wheel is to be marked by noticing that the right-hand ordinate cd is M'' , which by the notation is the moment at the support when wheel 2 is at the section. At every section, therefore, between f and e the greatest shear will be produced when wheel 1 is at the section, and for all sections between f and g (the left support) when wheel 2 is at the section.

In the girder under consideration the shears under the first two wheels are equal at a section a little over 60 feet from the left support. For the live load here employed no plate girder has been built of so large a span as to cause wheel 3 at any section to give a greater shear than wheel 2.

The load is now placed in position for the different sections successively, and the corresponding moments at the right support read off. When these are divided by the span the left reactions are obtained, and from the reactions the shears are found by subtracting P_1 in the case of those sections for whose position P_1 lies between the section and the left support. For the section at 15' the moment at the right support is 7 040 thousand pound-feet. This gives a reaction of $7\ 040 \div 80 = 88.0$, and a shear of $88.0 - 8 = 80.0$ thousand pounds, or 80 000 pounds. For the section 0 wheel 1 is off the girder, and hence the ordinate below the line Bb in Fig. 89 must be deducted from the moment at the right support. The shear at 0 is found to be $(10\ 225 - 705) \div 80 = 119.0$ thousand pounds. The values of the shears from sections 0 to 40' inclusive are 119.0, 105.6, 92.6, 80.0, 68.8, 58.9, 50.1, 41.8, and 33.9, all expressed in units of a thousand pounds. The form of diagram employed (Fig. 91) indicated at a glance that a single locomotive followed by a train produces slightly greater shears at sections 15', 20', 25', and 30' than the load with two locomotives, their values being 80.4, 69.8, 59.8, and 50.4 thousand pounds respectively.

Usually only the maximum shears in one-half of the girder are required, but in order to show the variation of shear across the entire girder as well as the minimum values, the shear diagram due to dead and live load is shown in Fig. 94. The greatest live load shears (all positive) are laid off above the axis and the dead load positive shears below the axis, so that the diagram combines their values. The point of zero shear is at 55.6' or at 15.6 feet from the middle of the girder.

The shear may therefore change sign at all points within this distance on each side of the middle. If the live load were uniformly distributed, the shear curve would be a parabola, with its vertex at the right end of the girder.

When the live load consists of passenger instead of consolidation locomotives it is possible that for some spans the section in which $V_1 = V_2$ may be on the right of that where $V_1 = V_2$, in

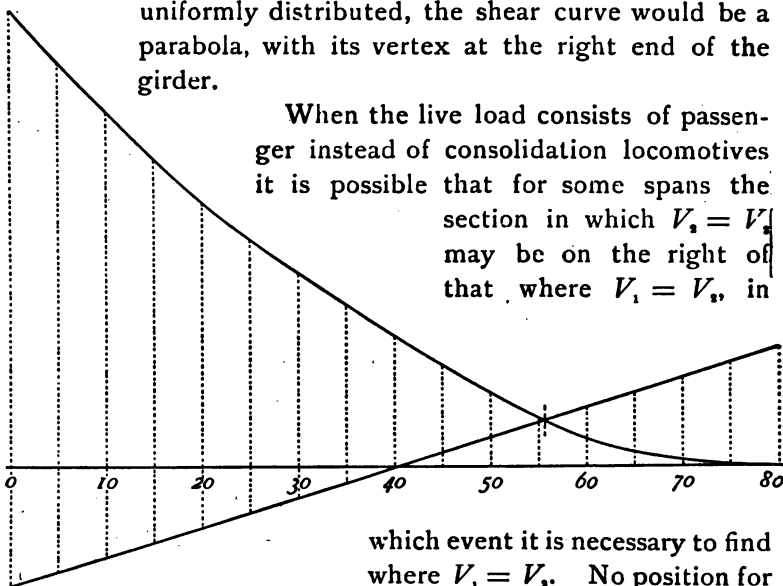


Fig. 94.

which event it is necessary to find where $V_1 = V_2$. No position for maximum shear then requires

wheel 2 to be at any section.

If the girder is divided into panels by floor beams the criterion for position for maximum shear is the same as for trusses with parallel chords. The necessary formula was deduced in Part I, Art. 60, but its graphic application will be deferred to Art. 45. The live load shear curve would be transformed into a series of steps like that in Fig. 81, and the dead load shear diagram would consist of two parts, one for the floor system which is concentrated at the panel points, and the other for the weight of the girder itself, which is uniformly distributed.

Prob. 55. Take the plate girder used in the example in Art. 40, find where $V_1 = V_2$, and the values of the maximum shears due to one Lehigh Valley consolidation locomotive and train.

ART. 44. SIMULTANEOUS MOMENTS.

In designing the riveting of the flanges to the web of a plate girder it is necessary to have the horizontal shear between them or the increments of flange stress between the sections for which the bending moments and vertical shears were found. If the sections

are a distance dx apart the difference of bending moments dM is a maximum when the load is so placed as to cause the vertical shear to be a maximum, since from mechanics $dM = Vdx$. When the distance between the sections is greater than dx the difference of bending moments is a maximum when the loads are so placed that the vertical shear is a maximum in the section

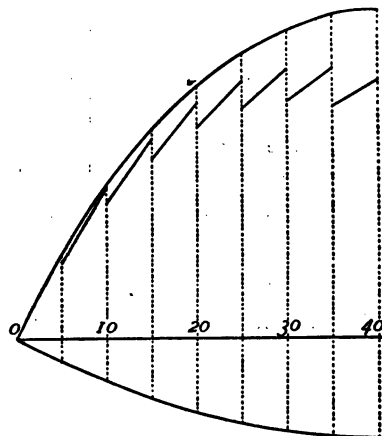


Fig. 95.

nearer the middle of the span, and this holds true for uniform loads until the sections are separated a distance somewhat less than half the span. As the sections are not taken farther apart than the depth, which even in short spans is generally less than one-eighth of the span, the exact value of the limiting distance referred to need not be determined.

The following table contains the simultaneous bending moments in each pair of adjacent sections of the girder used in the preceding two Articles when the live load is so placed as to produce the maximum shear in the section nearer the middle of the girder. The moments are expressed in thousand pound-feet. The differences in this table are to be increased by the corresponding differences in the dead load bending moments. The moments themselves are laid off as ordinates

in Fig. 95, those of each pair being joined by a right line. The upper curve gives the maximum live load bending

DISTANCE OF SECTION FROM SUPPORT.	LOAD IN POSITION FOR MAXIMUM SHEAR AT SECTION.								DISTANCE OF SECTION FROM SUPPORT.
	5'	10'	15'	20'	25'	30'	35'	40'	
Feet. 0	0	1315	Feet. 20
5	530	480	1610	1430	25
10	945	850	1680	1470	30
15	1255	1125	1680	1445	35
20	1470	1610	40
Difference	530	465	405	345	295	250	210	165	Difference

moments. Those due to dead load are laid off below the axis.

Prob. 56. Find the simultaneous moments in the sections of the plate girder used in the example in Art. 40 (see Plate III).

ART. 45. SHEARS IN TRUSSES.

In a similar manner to that explained in Arts. 43 and 42 for a plate girder the shears and bending moments in the Pratt truss in Art. 41 can be found by means of a single diagram for the locomotive and train load, the positions which give the maximum stresses being first determined by means of the load line.

In Part I, Art. 60, the criterion for the position of the live load producing the greatest vertical shear in any section of a truss was found to be $P'' = \frac{1}{m}W$, in which W is the whole load on the truss, P'' the wheel loads (one or more) on the panel cut by the section, and m the number of panels in the truss. Let this equation be transformed into $W = mP''$. When the truss diagram is placed on the load line the value

of W can at once be read off on the ordinate at the right support for any given position of the truss with respect to the loads. If wheel 2 be placed just on the right of a panel point W must be equal to mP_1 , and if just a little to the left of the same panel point then W must be $m(P_1 + P_2)$. The condition will therefore be satisfied if wheel 2 is at the panel point, and the value of W is found to lie between the values mP_1 and $m(P_1 + P_2)$, and similarly for any other wheel.

In this example, which was also treated by the analytic method in Part I, Art. 63, $m = 7$, $P_1 = 8$ tons, $P_1 + P_2 = 16$ tons, and $P_1 + P_2 + P_3 = 36$ tons. The following table is then arranged:

Wheel at Panel Point.	Corresponding Values of W .
1	0 — 56 tons.
2	56 — 112 “
3	112 — 252 “

The moment diagram of the single Pennsylvania passenger locomotive and train is constructed like that illustrated in Fig. 89, and the truss diagram (like Fig. 96) is drawn to the same linear scale on a sheet of tracing paper, but with the verticals extended as high as the moment diagram. To find




Fig. 96.

Fig. 97.

the position for maximum shear in Cc and Cd due to this load shift the truss diagram on that of the load line until wheel 3 is at d . If this is the correct position the load on the truss must be between 112 and 252 tons. This is found to be the case, its value being 154 tons. For the greatest positive shear in Fg (which equals the greatest negative shear in Bc) wheel 2 is placed at g . The load W is then 56 tons, which

just meets the condition and indicates that wheel 1 at g should also be tried. In the latter case W is 36 tons. The positions are all recorded in the following table. In practice it is preferable to obtain all the positions before reading off any moments from the equilibrium polygon, that is, to deal with only the load line at first and with the equilibrium polygon afterwards.

PANEL.	WHEEL AT RIGHT END OF PANEL.	MOMENT AT RIGHT SUPPORT.	MOMENT AT RIGHT END OF PANEL.	SHEAR.	STRESS.	WEB MEMBER.
<i>ab</i>	3	15075	188	98.3	- 123.0	<i>aB</i>
<i>bc</i>	3	11100	188	69.9	+ 91.0	<i>Bc</i>
<i>cd</i>	3	7730	188	45.8	- 45.8	<i>Cc</i>
					+ 59.6	<i>Cd</i>
<i>de</i>	3	4940	188	25.9	- 25.9	<i>Dd</i>
					+ 33.7	<i>De</i>
	2	3885	44	25.5		
<i>ef</i>	2	1965	44	11.8	+ 15.4	<i>Ef</i>
<i>fg</i>	2	645	44	2.4		
	1	390	0	2.8	+ 3.6	<i>Fg</i>

The moments in the third column of the table may now be read directly from the diagram. Those in the next column were computed and marked on the diagram when it was constructed. They are all expressed in tons-feet. Since the span is 140 feet and the panel length 20 feet, the shear in Cc and Cd is $(7\ 730 \div 140) - (188 \div 20) = 45.8$ tons. As it is not necessary to know the value of the reaction separately, and as usually the panel length is not such a simple number as the above, it is better to multiply the moments in the fourth column by the number of panels in the truss, subtract the products from the moments in the third column, and divide the remainder by the span. Thus the shear in Cc and Cd is $(7\ 730 - 7 \times 188) \div 140 = 45.8$ tons. The stresses are obtained from the shears either graphically or by the aid of logarithms, as may be more expeditious.

As the method described above is the exact graphic equivalent of the analytic method given in Part I, Art. 63, the student should make a careful comparison between them. Fig. 97 is placed beside Fig. 96 as an aid in comparing the results obtained by the analytic and the two graphic methods.

The criterion for position used in this Article applies to all trusses with horizontal chords and single systems of webbing, like the Howe and the Warren as well as the Pratt truss. When one or both of the chords are inclined, the maximum shear does not give the maximum web stresses, since the chord takes some of the shear. The method of finding the position of the live load for trusses with inclined chord members will be given in Art. 49.

Prob. 57. The Pratt trusses of a single-track through railroad bridge have seven panels, each 25 feet 8 inches long and 32 feet deep. Find the shears and stresses in all the web members except the suspenders due to two Lehigh Valley consolidation locomotives and train (see Fig. 87 in Art. 39).

ART. 46. FLOOR-BEAM REACTIONS.

In order to find the maximum floor-beam reaction or stress in the suspender Bb due to locomotive wheel loads it is necessary to deduce additional formulas. In Fig. 96 let R be the stringer reaction at a , and R_b the sum of the adjacent stringer reactions, or the floor-beam reaction, at b . Let P be the whole load on the two stringers of equal spans ab and bc , and g the distance of the center of gravity from c ; let P' be the load on ab , and g' the distance of its center of gravity from b . Since the sum of the moments of loads and reactions about b is zero,

$$R_a p - P' g' = 0, \quad \text{or} \quad R_a p = P' g'.$$

Taking moments about c ,

$$R_a 2p + R_b p - P g = 0.$$

Substituting and reducing,

$$R_b = \frac{Pg - 2P'g'}{p}.$$

If the loads be moved a distance dx to the left both g and g' will receive an increment dx , and R_b an increment

$$dR_b = \frac{Pdx - 2P'dx}{p}.$$

Placing the derivative equal to zero gives

$$P = 2P'.$$

That is, when the live load in both panels is double that in the panel ab the resulting value of R_b is a maximum. This is the same condition as for finding the maximum bending moment at the middle of the girder whose span is ac .

The use of the load line gives the position very quickly, and the moments Pg and $P'g'$ can be read off on the moment diagram. If M_c be the moment ordinate at c , and M_b that at b , the value of R may be more conveniently expressed and remembered as

$$R_b = \frac{M_c - 2M_b}{p}.$$

In the case of bridges where the two panels at the end, p_1 and p_2 , are not equal, the value of R_b deduced in a similar manner is

$$R_b = \frac{p_1 M_c - (p_1 + p_2) M_b}{p_1 p_2},$$

the criterion for loading being that which produces a maximum moment at b in a girder whose span is ac , p_1 being the span of the stringer ab , and p_2 the length bc .

In applying this condition for loading, one of the heaviest loads should be placed at b and as large a load brought on the two panels from a to c as possible. When wheel 2, in the example used in the previous Article, is placed at b and

the thread is stretched to unite the intersections of the ordinates at a and c with the load line, it crosses the step representing wheel 2 and hence satisfies the condition. The moment at c is 1 170, and that at b is 188 tons-feet, whence $Bb = (1\ 170 - 2 \times 188) \div 20 = 39.7$ tons. When wheel 4 is at b the condition is also satisfied, and the corresponding stress found to be the same as for the other position.

Prob. 58. Find the stresses in the suspenders in Prob. 57 in the preceding Article.

ART. 47. MOMENTS IN TRUSSES.

The method used in the preceding Article in obtaining the maximum shears will now be employed to find the maximum chord stresses in the same truss and due to the same wheel loads.

The condition for loading is expressed by a formula deduced in Part I, Art. 61, which, in slightly modified form, was given in Art. 42 and its application to a plate girder fully explained. As there stated, it applies only to the bending moments in vertical sections through the panel points of the loaded chords of trusses. The positions are recorded in the following table for the required sections of the left half of the

SECTION.	WHEEL AT SECTION.	MOMENT AT RIGHT SUPPORT.	MOMENT AT SECTION.	BENDING MOMENT.	STRESS.	CHORD MEMBER.
Bb	3	15075	188	1966	81.9	$ab = bc$
	4	16850 - 1140	476 - 180	1948		
Cc	5	14540	1008	3146	131.1	$cd = BC$
	4	12610	476	3127		
Dd	8	13610	2124	3709	154.5	$CD = DE$
Ee	train	14510	4605	3686	153.6	de

truss. As for the section Ee the train is at the section the direction of the thread must coincide with the straight portion

of the load line representing the train, and hence the left end of the truss must be placed at the point where the line produced meets the horizontal axis.

For a truss having equal panels, as in this example, time may be saved as well as increased precision secured by not drawing the closing lines and reading the bending moments directly, but by reading the moments at the right support and at the given section. The latter, being at a wheel, has its value marked on the diagram, and is hence quickly obtained. The subtractive moments for the second position for section Bb are those due to wheel 1, which is off the bridge.

The computation for the bending moment is very simple for trusses with equal panels, as it is not necessary to obtain the value of the reaction separately. For wheel 5 at c the bending moment in the section Cc is

$$\frac{2}{7}(14\ 540) - 1\ 008 = 3\ 146 \text{ tons-feet,}$$

and when divided by the depth the chord stress is $3\ 146 \div 24 = 131.1$ tons.

Since there is no dead load shear in the middle panel, it is necessary to find which one of the diagonals is acting for each of the positions for sections Dd and Ee . The shear equals the left reaction of the truss minus the loads from a to d , minus the reaction at d of the stringer de . By producing the side of the equilibrium polygon immediately on the left of d when wheel 8 is at d and reading the moment intercepted above this line at e the moment of the stringer reaction at d about e as a center is obtained. Its value is found to be 380 tons-feet. The shear is therefore

$$\frac{13\ 610 - 7 \times 380}{140} - 80 = -1.8 \text{ tons.}$$

As the diagonals can take only tension, this shear calls dE into action, and hence the bending moment for the section

Dd gives the chord stress in both CD and DE . For the last position the entire panel is covered by the train load, and therefore the stringer reaction at d is 15 tons. The shear is

$$\frac{14\ 510}{140} - 90 - 15 = - 1.4 \text{ tons.}$$

Since this also stresses the diagonal dE , the moment for the section Ee gives the chord stress in de .

The sign of the shear without its magnitude may be more quickly determined for each of these positions by drawing the closing line of the equilibrium polygon and with the aid of the dividers finding whether the bending moment at d is greater or less than the simultaneous moment at e . In the former case the shear is negative and in the latter positive (see Art. 9).

When the center of moments of a chord member is situated on the unloaded chord of a truss, and does not lie in the vertical section through a panel point of the loaded chord, one of the last two formulas of Part I, Art. 61, determines the condition of loading. An example of their application will be given in Art. 56. The condition in all cases applies to inclined as well as to horizontal chords.

Prob. 59. Find the greatest live load stresses in the chords in Prob. 57 in Art. 45.

CHAPTER V.

TRUSSES WITH BROKEN CHORDS.

ART. 48. POINTS OF DIVISION IN PANELS.

For the truss in Fig. 98 the position of the locomotive wheel loads, or of any other class of live load which produces the greatest stress in any chord member, is found by the same criterion as if the chords were both horizontal. The same

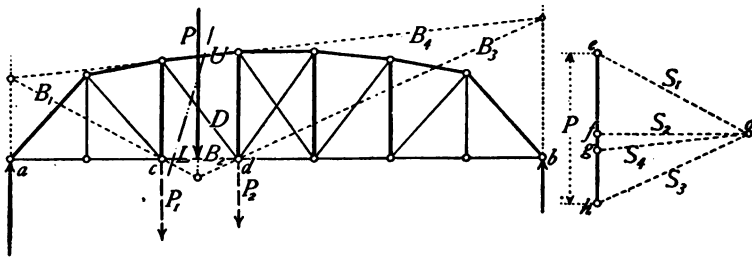


Fig. 98.

statement would be true if both chords were broken or curved. On the other hand, the stress in any web member for the position of the live load which causes the maximum shear in the section is not the greatest in this case, because the inclination of any chord member cut by the section causes it to take some of the shear. It will be necessary, therefore, to find the condition of loading which is required by trusses with inclined chord members.

The section shown in Fig. 98 cuts the upper chord member U , the diagonal D , and the lower chord member L . By the method of moments the center of moments for D is at the

intersection of U and L , some distance beyond the figure on the left. If a single concentrated load P_1 be placed at c or at any point on the left of c , it will cause compression in the diagonal D . This is readily seen to be the case, since the stress in D (which is directed away from the section, and hence downward) holds in equilibrium the forces on the left of the section, and therefore their resultant. The resultant of P_1 and the reaction at a is a downward force at the right support b , and hence its moment is positive. If a single load P_2 be placed at d or at any point on the right of d , it will cause compression in the diagonal, for the stress in D holds in equilibrium only the upward reaction at a whose moment is negative.

When a load P is placed between c and d , the floor system of the bridge transfers a portion P_1 to the panel point c of the truss and the remaining portion P_2 to the panel point d , that is, the load P is replaced on the truss by its components P_1 and P_2 . As one of these causes compression and the other tension in D , there must be some position of the load P for which the resulting stress in D is zero.

Let U be produced to meet the verticals at a and b , let these points of intersection be joined with c and d , and the lines produced until they meet. Let P be placed directly over this latter intersection. On the right of the figure is shown a force polygon, in which eh is laid off by scale equal to P , and the rays S drawn parallel to the corresponding lines B as indicated by their subscripts. The lines $B_1, B_2,$ and B_3 form an equilibrium polygon, and hence eg equals the reaction at a , and gh the reaction at b . Portions of the lines B_1 and B_2 and the line cd , or B_3 , form another equilibrium polygon, and therefore ef represents P_1 and fh represents P_2 . Consequently $B_1, B_2, B_3,$ and B_4 form an equilibrium polygon for the loads $P_1, P_2,$ and the reactions at a and b respectively. The line of action of the resultant of P_1 and the reaction at a must pass

through the intersection of B_1 and B_2 (Art. 7), which by construction coincides with the center of moments. The moment of the resultant is therefore zero, whence it follows that the stress in D is also zero.

The position of a concentrated load P causing no stress in any web member can therefore be found by the following rule:

Pass a section cutting the web member and a member of each of the chords. Produce the unloaded chord member to an intersection with the verticals at the supports. Join these points with the panel points at the end of the loaded chord member. The intersection of these lines gives the required position.

From the manner in which the above investigation was made it is clear that this rule applies also to a truss in which both chords are curved, and for webbing whose posts are not vertical. The rule is therefore stated in its general form and applies to deck as well as through bridges.

The manner in which the section must be cut to obtain the stresses in the vertical posts depends upon which diagonals are acting in the adjacent counter-braced panels (see Part I, Art. 36, and Part II, Arts. 30 and 35). The position of P which produces no stress in the vertical on the left of D in Fig. 98 when both of the adjacent main diagonals are acting is somewhat nearer to panel point d .

The results of this investigation also show that if the live load consists of panel loads, all the panel points on the right of P are to be loaded for the greatest tension in D . If one excess load is employed it must be placed at d . For the greatest tension in the counter diagonal in the same panel the load is similarly placed at c , and the panel points on the left. This loading, it will be observed, does not differ from the corresponding one for horizontal chords.

If the live load is uniformly distributed it must extend from the right support to the position of P for the greatest tension in D , and from the left support to the position of P for the greatest tension in the counter diagonal. When the construction shown in Fig. 98 is applied to trusses with horizontal chords it gives the positions for true live load shear which were determined by the analytic method in Part I, Art. 56. The position of locomotive wheel loads which produces the greatest stress in D will be found in the next article.

Prob. 60. Find the position of P for all the diagonals and the second, third, and fourth verticals of the bowstring truss in Fig. 74, Art. 35.

ART. 49. POSITION OF WHEEL LOADS.

In Fig. 99 the position of P in Fig. 98 which causes a stress of zero in the diagonal is indicated by the vertical marked x . Let the stresses in the diagonal, lower chord, and upper chord, cut by a section through the panel cd be denoted by

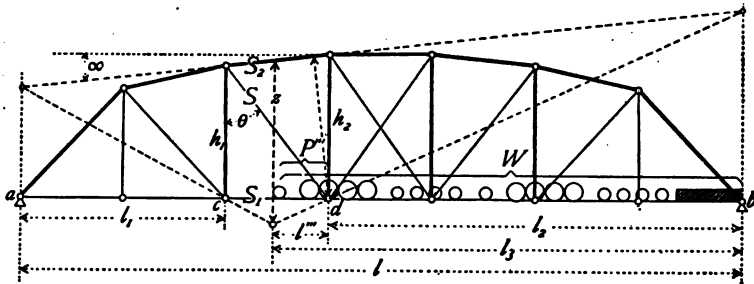


Fig. 99.

S , S_1 , and S_2 respectively, and the depths of the truss at c and d by h_1 and h_2 . Let the total weight of the wheels (one or more) on the panel cd be P''' , and the distance of its center of gravity from d be g''' , W being the weight of the entire load on the truss, and g the distance of its center of gravity from the right support. Let the bending moments at the

upper and lower extremities of D be M_1 and M_2 respectively. The remaining terms employed in the following discussion are shown in the figure.

Let the segment of the truss on the left of the section cutting S_2 , S , and S_1 be considered. Resolving horizontally,

$$S_2 \cos \alpha + S \sin \theta + S_1 = 0.$$

The lever arm of S_2 makes the same angle α with the vertical h_2 as S_2 makes with the horizontal. Taking moments about d ,

$$M_2 + S_2 h_2 \cos \alpha = 0, \quad \text{whence} \quad S_2 \cos \alpha = -M_2 \div h_2;$$

and taking moments about the panel point at the upper end of D ,

$$M_1 - S_1 h_1 = 0, \quad \text{whence} \quad S_1 = M_1 \div h_1.$$

After substituting these values above, there follows,

$$-\frac{M_2}{h_2} + \frac{M_1}{h_1} + S \sin \theta = 0, \quad \text{or} \quad S \sin \theta = \frac{M_2}{h_2} - \frac{M_1}{h_1}.$$

The last equation is an important one, and indicates that the horizontal component of the stress in any web member equals the difference of the quotients obtained by dividing the bending moments at the extremities of the member by the corresponding depths of the truss at those points.

The values of the bending moments are

$$M_1 = \frac{Wg l_1}{l} \quad \text{and} \quad M_2 = \frac{Wg}{l} (l - l_2) - P''' g'''.$$

From similar triangles

$$h_2 : s = l_1 : l - l_1 \quad \text{and} \quad h_1 : s = l_2 : l_1;$$

whence

$$h_2 = \frac{l_1 s}{l - l_1} \quad \text{and} \quad h_1 = \frac{l_2 s}{l_1}.$$

Substituting these values of M_1 , M_2 , h_1 , and h_2 , reducing, and finally replacing $(l_1 - l_2)$ by l''' ,

$$S = \frac{Wgl''' - P'''g'''l_1}{l_1 z \sin \theta}.$$

If the load advance a distance dx , both g and g''' receive an increment of dx , and the stress S receives an increment of

$$dS = \frac{(Wl''' - P'''l_1)dx}{l_1 z \sin \theta}.$$

Placing the derivative equal to zero gives the condition which makes S a maximum, which is $Wl''' - P'''l_1 = 0$, or, when put into more convenient form for use,

$$P''' = \frac{Wl'''}{l_1}.$$

This formula is very convenient to use graphically, and as it is similar in form to that for maximum moment (Arts. 42 and 47) it is to be treated in like manner. Referring to Fig. 100, which illustrates the truss diagram (drawn on tracing paper) placed in position on the live load moment diagram, bg represents the

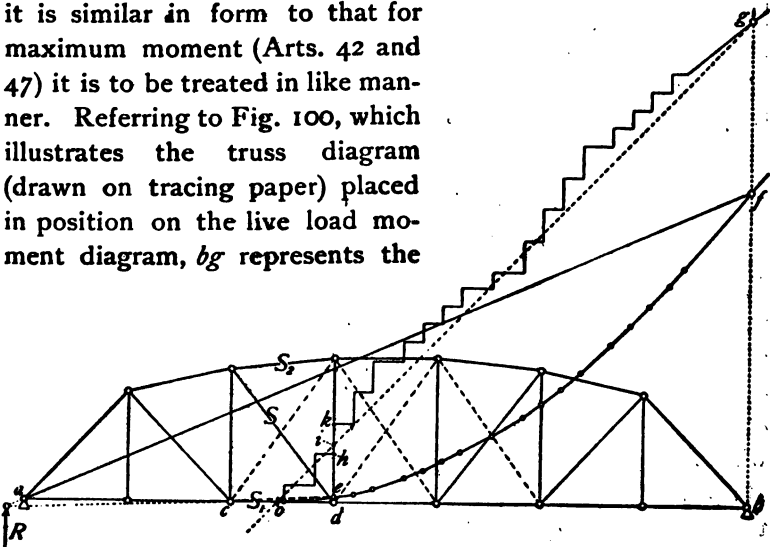


Fig. 100.

total load W , ob the distance l_1 , and od the distance l''' . The ordinate di is therefore equal to $Wl''' \div l_1$, and this must equal P''' if the position is correct. When the load is so placed that a wheel is just on the right of the panel point d , the load P''' is represented by dh , and if just to the left of it by dk ; hence if i lies anywhere between h and k , or, in other words, if the thread stretched from o to g cuts the load placed at the panel point, the criterion for position is satisfied. A wheel must always be placed at the panel point, and while usually the first wheel is at the right of o , it may sometimes happen that the condition is met when the first wheel is a little to the left of o . After the right position is found the moment ordinates bf and de are read off as usual.

Prob. 61. A double track through railroad bridge has trusses of the type illustrated in Fig. 100. There are 12 panels, each 30 feet long. The depths at panel points 1 to 6 inclusive are 29' 0", 41' 0", 49' 5", 53' 4", 58' 10", and 60' 0" respectively. The live load is WADDELL'S Compromise Standard, Class U (Art. 39). Find the position of the live load which shall produce the greatest stresses in the main and counter ties and the posts. Six panels require counter bracing. Also compare these positions with what they would be if the truss had parallel chords.

ART. 50. RESOLUTION OF THE SHEAR.

In Fig. 100 in the preceding article the stresses S_1 , S , and S_2 hold in equilibrium the external forces on the left of the section cutting these members. These external forces consist of an upward reaction at a and a downward force at c equal and opposite to the left reaction of the stringer in the panel cd . The resultant R of these two forces is an upward force whose line of action is a little to the left of the support a . Its position may be readily determined, if desired, by drawing the closing line af and the chord ce of the equilibrium polygon and producing them to their intersection.

Referring now to Fig. 101, let the resultant R be replaced by two forces P_1 and P_2 , the former acting downward at panel

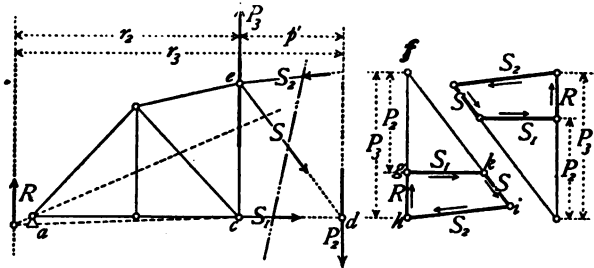


Fig. 101.

Fig. 102.

Fig. 103.

point d and the latter acting upward at e . The points d and e are at the extremities of the diagonal cut by the section. Taking moments about e , and remembering that the bending moment at e is M_1 ,

$$Rr_1 = P_1 p', \quad \text{and} \quad P_1 = \frac{Rr_1}{p'} = \frac{M_1}{p'}$$

Similarly taking moments about d ,

$$Rr_2 = P_2 p', \quad \text{and} \quad P_2 = \frac{Rr_2}{p'} = \frac{M_2}{p'}$$

Taking vertical components,

$$R = P_1 - P_2 = \frac{M_1}{p'} - \frac{M_2}{p'}$$

Since R is equal to the vertical shear in the section, the last member of the preceding equation affords a useful method of obtaining the vertical shear when the moments are known.

In Fig. 102 the force triangle hfi gives the magnitude and direction of a force acting in the diagonal which is in equilibrium with P_1 and S_1 , while the superimposed force triangle fgk gives the magnitude and direction of a force acting in the same diagonal which is in equilibrium with P_2 and S_2 . The polygon $hfgkih$ must therefore express the relation of equi-

librium between P_1 , P_2 , S_1 , S_2 , and S_3 , or the polygon $hgkih$ that between R , S_1 , S_2 , and S_3 . Following around the triangle in the direction of the known force R as indicated by the arrows, and transferring these directions to the truss diagram in Fig. 101, S_1 and S_2 are found to be in tension and S_3 in compression. It will be observed that the forces in the polygon $hgkih$ follow each other in the same order as they are found when passing around the segment of the truss. Fig. 103 shows the same construction when the forces are laid off in the reverse order. As will be illustrated later by an example, it is sometimes preferable to use the one and sometimes the other order.

It is evident on inspection that the most convenient and economical construction of the force polygon in Fig. 102 (or in Fig. 103) would be to draw it directly on a large scale truss diagram. In Fig. 104 one such force polygon is drawn

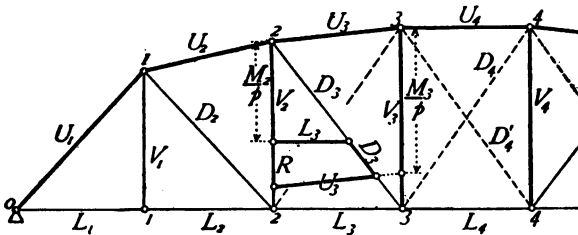


Fig. 104.

in the third panel. The notation shown is well adapted to promote rapid construction and freedom from confusing the stresses. The panels are numbered from left to right and the corresponding numbers are placed at the panel points on their right. The upper chord members are denoted by U , the diagonals by D , and the lower chord members by L , the subscripts being those of the panels containing them. The verticals V necessarily have the subscripts of the panel points. The forces $M_1 \div p$ and $M_4 \div p$, equal respectively to the forces P_1 and P_4 in Fig. 101, are laid off as indicated, and the sides

of the force polygon drawn parallel respectively to the truss members whose names are placed by their sides. The panel length p in this case is equal to the horizontal projection p' of the diagonal.

In order to obtain the stress in the vertical V_1 , for example, the values of $M_1 \div p$ and $M_2 \div p$ are found for the proper position of the live load (which may not be the same as for D_1) and a force polygon drawn as in Fig. 104. This gives U_1 and D_1 for that position of the load, and on constructing the force polygon for the upper panel point 2 the stress in V_1 is determined. The latter polygon may be drawn directly on the former so as to avoid redrawing the sides U_1 and D_1 . To avoid confusion it is omitted in the figure.

This method may also be applied with advantage to determine the stresses in the chords when the moments have been found after placing the live load in its proper position. In this case it will be desirable to place the force polygon on the other side of the diagonal, the values of $M \div p$ being laid off upward from the lower panel points. This will give a polygon like that in Fig. 103.

Prob. 62. Find the maximum live load stress in the counter tie of the fourth panel, and the minimum live load stress in the second vertical, of the truss in Prob. 61.

ART. 51. EXAMPLE—MAXIMUM CHORD STRESSES.

Let the truss in Fig. 104 and on Plate V be that of a single track through railroad bridge, having seven panels each 27 feet long, and depths at the panel points 1, 2, and 3, of 29, 35, and 38 feet respectively. Let the live load consist of Class U of WADDELL'S "Compromise Standard System" (Art. 39). The dead load will be assumed at 1 100 pounds per linear foot per truss, of which 300 pounds is to be applied on the upper chord. This makes the panel loads on the lower

chord 21 600 pounds and on the upper chord 8 100 pounds. Since the dead load stresses in all the members of the truss except the verticals are the same whether the dead load is all taken on the lower chord or divided between the chords, and the stresses in the verticals differ by the amount of the upper panel loads (Art. 28), the stresses will preferably be obtained for only lower panel loads of 29 700 pounds, and the maximum and minimum stresses in the verticals afterward corrected by adding to each of them a compression of 8 100 pounds.

In constructing the load line and equilibrium polygon for the live load it was found convenient to use the weights on one rail only, and to adopt scales of 8 feet, 20 thousand pounds, and 2 000 thousand pound-feet per inch respectively. Profile paper, Plate A, was used and required a small splice at the upper right corner in order to extend the curves as far as necessary. In reading the scales the tenths of the small divisions of the profile paper were estimated by eye. When this diagram is used for a double track bridge the stresses obtained are expressed in tons instead of in units of one thousand pounds.

The dead load stress diagram for panel loads of 29.7 thousand pounds is shown in Fig. *b* on Plate V, and the stresses are marked on the diagram. The character of the web stresses is also indicated as referred to the small truss diagram. The computation of the bending moments at the panel points may be arranged as follows, when the panels are all equal: The product of the panel load and panel length is $29.7 \times 27 = 801.9$. The half products of the number of panels in each segment into which the panel points respectively divide the truss are $\frac{1}{2}(1 \times 6) = 3$, $\frac{1}{2}(2 \times 5) = 5$, $\frac{1}{2}(3 \times 4) = 6$; and the bending moments are

$$M_1 = 3 \times 801.9 = 2\,406, \quad M_2 = 5 \times 801.9 = 4\,010, \\ M_3 = 6 \times 801.9 = 4\,811 \text{ thousand pound-feet.}$$

Since $p = 27$ feet, the corresponding values of $M \div p$ are:

$$\frac{M_1}{p} = 89.1, \quad \frac{M_2}{p} = 148.5, \quad \frac{M_3}{p} = 178.2 \text{ thousand pounds.}$$

The following table shows the position of the live load obtained by means of the load line. The moments in the third column were read from the moment diagram, and those in the fourth column were copied from the same diagram, while the quantities in the fifth and sixth columns were computed from those in preceding columns. The moments are expressed in units of one thousand pound-feet.

CENTER OF MOMENTS.	WHEEL AT SECTION.	MOMENT AT RIGHT SUPPORT.	MOMENT AT SECTION.	BENDING MOMENT (M).	$\frac{M}{p}$.	REMARKS.
1	4	40 980	480	5 374	199.2	
2	8	39 400	2 622	8 635	319.8	
3	12	39 010	6 331	10 388	384.7	D_1 acts
4	14	32 520	8 291	10 292	381.2	D_1' acts
	15	35 540	10 099	10 210	378.1	D_1 acts

It is necessary to know which diagonal acts in the middle panel for the last three positions in order to determine which moments give the stresses in the chords of that panel. As explained in Art. 47, the vertical shears are found as follows:

$$(39\ 010 - 7 \times 1\ 470) \div 189 - 166 = - 14.1;$$

$$(32\ 520 - 7 \times 830) \div 189 - 136 = + 5.2;$$

$$(3\ 554 - 7 \times 1\ 240) \div 189 - 146 = - 3.9.$$

These results enable the remarks to be inserted in the last column of the table.

The values of $M \div p$ are now laid off on the truss diagram in Fig. *c* on Plate V, as there indicated, and the force polygons completed as explained in the preceding article. The scales of the original drawing of Fig. *c* were 6 feet and 80 thousand pounds per inch respectively. The values of the stresses are marked on the polygons. The special attention of the

student is called to the fact that since U_1 has its center of moments at the lower panel point 3 the side of the polygon ad parallel to U_1 must be drawn through d , the extremity of $M_1 \div p$ laid off on the vertical ordinate passing through the center of moments. Similarly, as L_1 has its center of moments at the upper panel point 2, the side bc must be drawn parallel to L_1 through c' , which lies on the vertical through its center of moments. Strict attention to this statement is especially required when the upper panel points are not directly above the lower ones, in which case the panel points should be numbered in regular order from left to right, no matter on which chord they lie. The chords should then have the same subscripts as their centers of moments.

The side ab of the polygon $abcd$ is not the stress in the diagonal D_1 , because the moments at 2 and 3 used in its construction are not simultaneous.

If it be desired to find by this method whether D_1 or D_1' acts when the moment is a maximum at panel point 3, it can be done by finding the simultaneous value of $M_1 \div p$. It is found to be 370.7. If D_1 be assumed to act, the side L_1 will lie below U_1 . It is shown as a broken line. By referring again to Fig. 101 the direction around the polygon is toward the right of L_1 , upward on D_1 , and toward the left on U_1 . Upward on D_1 means also toward the right, or away from the section, and therefore tension, which proves the assumption to be correct. Again, since $(M_1 \div p) - (M_1 \div p) = R$, which equals the vertical shear in the section indicated in Fig. 101, the vertical shear in the middle panel is $370.7 - 384.7 = -14.0$, the difference of 0.1 from the value given above being mainly due to the neglect of decimals. Usually the value of the vertical shear is not desired, but simply its sign, in which case it may be known as soon as it is seen whether M_1 is greater or less than M_1 (see also Art. 9).

As the end post receives its maximum stress under the

same position of the live load as L_1 , its stress may be found in connection with the chords. Indeed, it may be regarded as an upper chord member, the polygon of forces becoming a straight line, as shown on the drawing (Fig. *c*, Plate V).

The following table gives the maximum stresses in the end post and the chords due to the dead and live loads only, expressed in units of one thousand pounds. The minimum stresses equal the dead load stresses.

CHORD MEMBERS.	U_1	U_2	U_3	U_4	$L_1 = L_2$	L_3	L_4
Dead load...	- 121.7	- 117.2	- 127.2	- 126.4	+ 83.0	+ 114.4	+ 126.4
Live load...	- 271.0	- 252.2	- 275.3	- 273.5	+ 185.4	+ 247.0	+ 268.8
Maximum...	- 392.7	- 369.4	- 402.5	- 399.9	+ 268.4	+ 361.4	+ 395.2

Prob. 63. A truss of the same type as that in the example given in this article has nine panels, each 24 feet 9 inches long. The depths at its panel points 1, 2, 3, and 4 are 27' 0", 35' 9", 41' 0", and 42' 9" respectively. The dead load is 1 200 pounds per linear foot, of which three-eighths is to be applied at the upper chord. The live load is WADDELL'S Class U. Find the maximum and minimum stresses in the chords and end post due to these loads.

ART. 52. EXAMPLE—MAXIMUM STRESSES IN DIAGONALS.

The first step in finding the live load web stresses is to find the point of division in each panel where a concentrated load will produce no stress in the diagonal (see Art. 48). In practice only that portion of each triangle $B_1B_2B_3$ lying below cd in Fig. 98 need be drawn after the vertices on the ordinates at a and b are marked off. These points are shown in Fig. *d* on Plate V. In case more than one point is shown in any panel the left hand one belongs to the diagonal. The data in the following table are obtained in the same manner as for the chords after the positions are determined. That relat-

PANEL.	WHEEL AT RIGHT END OF PANEL.	MOMENT AT RIGHT SUPPORT.	MOMENT AT RIGHT END OF PANEL.	BENDING MOMENT (M) AT LEFT END OF PANEL.	BENDING MOMENT (M) AT RIGHT END OF PANEL.	LEFT $\frac{M}{p}$.	RIGHT $\frac{M}{p}$.
0-1	4	40 980	480	0	5374	.0	199.2
1-2	3	28 830	230	4117	8004	152.5	206.4
2-3	3	19 840	230	5669	8273	210.0	306.4
3-4	3	12 280	230	5263	6787	194.9	251.4
4-5	3	6 331	230	3618	4292	134.0	159.0
	2	5 501	80	3143	3849	116.4	142.5
5-6	3	2 510	230	1793	1921	66.4	71.1
	2	1 960	80	1400	1600	51.8	59.3

ing to the first panel is inserted here, although it was also included in the table in the preceding article, the end post being treated as a chord member. The moments are expressed in units of one thousand pound-feet. The panels are indicated by the panel points in this table as a guide to the subscripts which properly belong to the corresponding values of M . The moments at the right support for the panel 4-5 are given with greater precision than the rest because it happened that these had been computed and marked on the diagram.

Attention is again called to the fact that the vertical shear in any panel may be found by taking the difference between the corresponding quantities in the last two columns.

In testing for position in panel 5-6 it was noticed that the thread just touched the edge of the step when wheel 3 was placed at panel point 6. When wheel 3 is placed at panel point 5, wheel 1 is a little on the left of the point of division, but the condition of loading is satisfied. If the chords were both horizontal the positions would be 4, 4, 3, 3, 2 and 2 in the successive panels, no panel having two positions of the live load.

The values of $M \div p$ are next laid off on the verticals through the panel points in Fig. *d* of Plate V. The values belonging to each panel are marked inside of the panel to

guard against confusion. This danger is not great, however, as it will be noticed that at each vertical the ordinate referring to the panel on the right is considerably less than that for the panel on the left. After completing the force polygons the stresses in the diagonals are scaled off and marked on the diagram. As the portion of the truss on the left of the section through any diagonal is considered, and the lower chord is always in tension, the direction of passing around the polygon is toward the right on L and toward the left on U , and therefore if the direction along D is toward the right it indicates tension. This is seen to be the case for all but one of the polygons shown on the plate.

In the fifth panel two polygons are drawn, the left one for wheel 3 at panel point 5, and the right one for wheel 2 at 5. The latter is placed on the other side of the diagonal to avoid interference. This position is not convenient for diagonals, as will be shown in the next article. In the sixth panel both polygons refer to the position of wheel 2 at panel point 6, the left hand one being drawn in order to show the influence on the construction by changing diagonals. The stress in D_4 when P_1 is at 6 is -21.8 .

The maximum and minimum stresses expressed in units of one thousand pounds are given in the following table, the end post being omitted, as its stresses were given in the preceding article.

DIAGONALS.	D_2	D_3	$D_4(=D_4')$	$D_5'(=D_5')$
Dead load	+ 46.2	+ 19.6	0	- 20.7
Live load from the right.....	+127.5	+ 91.0	+ 69.6	- 47.1
Live load from the left.....	- 22.2			
Maximum.....	+173.7	+110.6	+ 69.6	+ 26.4
Minimum.....	+ 24.0	0	0	0

Prob. 64. Find the maximum and minimum stresses in the diagonals in Prob. 63 in Art. 51.

ART. 53. EXAMPLE—MAXIMUM STRESSES IN VERTICALS.

The position for the maximum stress in V_1 is either wheel 4, wheel 12, or wheel 13 at panel point 1 (Art. 46). When wheel 13 is at 1, the same wheels of the second locomotive are placed on the first two panels and in the same position as those of the first locomotive when wheel 4 is at panel point 1, together with one additional wheel; hence it is not necessary to find the stress due to the latter position. The greatest stress occurs when wheel 13 is at 1, and equals

$$[3\ 730 - (2 \times 780)] \div 27 = 80.4 \text{ thousand pounds tension.}$$

If it is desired to employ a similar method for V_1 as that described in the preceding article, let the first two panels be regarded as a truss, and the load placed in proper position for maximum moment at panel point 2. The bending moments are then $M_0 = 0$, $M_1 = \frac{1}{2}(3\ 730) - 780 = 1\ 085$, and $M_2 = 0$. $M_1 \div p = 1\ 085 \div 27 = 40.2$. The vertical shear in each panel (disregarding signs) is therefore 40.2, and the floor beam reaction, or the stress in V_1 , equals their sum, or $40.2 + 40.2 = 80.4$ thousand pounds.

The respective points of division in the third, fourth, and fifth panels, where a concentrated load produces no stress in the vertical at the left of the panel, are the right hand ones shown in Fig. *d* of Plate V. The position and other necessary data given in the following table are found in exactly the same way as for the diagonals.

PANEL.	WHEEL AT RIGHT END OF PANEL.	MOMENT AT RIGHT SUPPORT.	MOMENT AT RIGHT END OF PANEL.	BENDING MOMENT (M) AT LEFT END OF PANEL.	BENDING MOMENT (M) AT RIGHT END OF PANEL.	LEFT $\frac{M}{p}$.	RIGHT $\frac{M}{p}$.
2-3	2	18 340	80	5 240	7 780	194.1	288.1
3-4	2	11 050	80	4 736	6 234	175.4	230.9
4-5	2	5 501	80	3 143	3 849	116.4	142.5

If the greatest live load stress in V_1 were due to the same position of the load as for D_1 , it would only remain to draw (on the diagram in the third panel of the truss in Fig. *d* of Plate V) the line marked U_1 parallel to that member of the truss in order to complete the force polygon for the upper panel point 2. The magnitude and character of the simultaneous stress in V_1 is marked on the diagram. If a force polygon like that one be drawn for the values of $M \div p$ in the first line of the above table, the stress in V_1 is found to be - 61.2 thousand pounds. The construction is omitted on the plate to avoid confusion, as it would partly cover the diagram already drawn. In the same way the greatest live load compression in V_2 is obtained. Its value is - 41.5. As the stress in V_1 (- 26.2) is less than that in V_2 , and since V_1 and V_2 are symmetrically located in the truss, the compression to be used for V_1 is the same as for V_2 , and will occur when the live load comes on the bridge from the left.

A reference to the lower force polygon in panel 5 of the same figure will now explain why it is not desirable to place all the force polygons for the web members on the right of the diagonals. It is seen that the side of the polygon giving the stress in V_1 lies on the vertical V_2 , which is not a convenient arrangement. In the next panel the polygon is placed on the right of D_1 , so as to preserve uniformity in laying off the values of $M \div p$ downward, and as no construction is needed for the stress in the vertical adjacent to that panel. The compression in the verticals is usually not required on the right of the middle of the truss.

VERTICALS.	V_1	V_2	V_3
Dead load.....	+ 29.7	- 4.1	+ 14.0
Live load.....	+ 80.4	- 61.2	- 41.5
Correction for division of dead panel loads.	- 8.1	- 8.1	- 8.1
Maximum.....	+ 92.0	- 73.4	- 35.6

The maximum stresses are given in the preceding table, the correction being applied on account of having taken the dead panel loads, as explained in Art. 51. The stresses are expressed in units of one thousand pounds.

Prob. 65. Find the maximum stresses in the verticals in Prob. 63 in Art. 51.

ART. 54. EXAMPLE—MINIMUM STRESSES IN VERTICALS.

In Arts. 30 and 35, as well as in other places, attention has been called to the fact that the stresses in the verticals of a truss with counter-braced panels depend upon the diagonals which are acting simultaneously in the adjacent panels. The influence of the diagonals not only affects the magnitude and character of the stress for any given position of the live load, but also the rate of change in the stress as the live load passes across the bridge. In order to determine what position of the live load will produce the minimum stresses in the verticals of the truss employed in the three preceding articles, let the

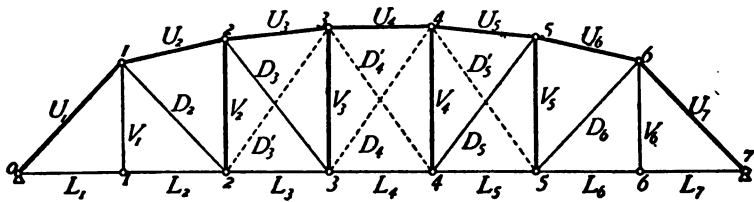


Fig. 105.

complete cycle of changes in the stress in V_4 (Fig. 105) be traced as the locomotives and train pass across the bridge from right to left.

When wheel 1 is at the right support the stress in V_4 is simply that due to the dead load. As the live load advances the combined dead and live load stress in V_4 gradually diminishes at an increasing rate, until a position is reached when the stresses in both diagonals D_4 and D'_4 are zero. Mean-

while the stress in the vertical has passed through zero from compression into tension. The tension increases at a reduced uniform rate until the stresses in D_1 and D_1' are both zero. If this is not possible, then the tension increases until D_1 becomes a minimum. As the load advances the tension in V_1 at first diminishes and afterwards increases until the stresses in D_1 and D_1' again become zero (if possible). During this interval the stress in V_1 has passed through zero twice, so that it is again tension, but larger in magnitude than before. The rate of change at the beginning and end of the period are also more rapid than in either the preceding or the succeeding one. The tension now increases at a reduced uniform rate until the stresses in both D_1 and D_1' are again zero. As the load advances until it covers the entire bridge, the stress in V_1 diminishes and passes through zero the fourth time and into compression. The rate of decrease was itself a decreasing one being greater at the beginning of this period, and nearly if not quite zero at the end. It will now be very slightly reduced until the head of the train arrives at the left support, when it will remain constant until the rear of the train begins to pass over the bridge. As the train continues to pass off the bridge the compression in V_1 increases at a variable rate until it reaches the maximum value, and then gradually diminishes again to the value of the dead load stress. The absolute maximum compression in V_1 was not reached in this passage of the live load, but will occur when it crosses the bridge from left to right.

During this cycle there were several periods during which the diagonals whose upper extremities are at panel point 5 were not acting, and when the stress in V_1 was therefore to be obtained by drawing the forcé polygon for that upper panel point. It is evident then that the tension in V_1 is the greatest when the compression in U_1 and U_2 is the largest possible without calling D_1 into action. As the maximum stresses in U_1 and U_2 occur when the entire bridge is covered with the

live load, the required position may be obtained from this one by moving the train backwards until the main diagonal in the panel which is adjacent to the vertical, and on the side toward the middle of the bridge, shall just cease to act. For deck bridges this statement would, of course, need modification. In the present example D'_4 does not act under any position of the live load, but the statement in the preceding paragraph was so framed as to apply also to V_4 by making the corresponding changes in the subscripts of D and D' .

The required position for the greatest tension in V_4 , or its minimum stress, was found by trial to be that when wheel 1 is 3 feet to the left of panel point 4. The moment at the right support is 9860, and those at panel points 4 and 5 are 30 and 1460 thousand pound-feet respectively. The live load bending moments at these points are therefore 5604, and 5583. Adding those due to dead load (Art. 51), $M_4 = 10415$, and $M_5 = 9593$. When divided by the panel length of 27 feet, the quotients are 385.7 and 355.3 thousand pounds. When these are laid off on Fig. *c*, Plate V, the resulting force polygon is reduced to two straight lines, indicating that there is no stress in D_4 . The corresponding polygon for D'_4 is drawn in broken lines. On drawing a parallel to U_4 , as shown, and thus completing the force polygon for the upper panel point 5, the stress in V_4 may be measured by scale. The direction of passing around the polygon is evident, since U_4 and U_5 are both known to be in compression. The combined stress is +30.5 thousand pounds. If M_4 is divided by 38 feet and M_5 by 35 feet, the quotients are both 274.1 thousand pounds, which being the horizontal component of U_4 and U_5 shows also that there is no stress in the diagonals and checks the graphic construction.

After some experience this position can be found with but few trials, and will not require much time if all the operations are performed by graphics. In Fig. 106 let the depths of

the truss at panel points 4 and 5 (38 and 35 feet respectively) be laid off on one side of an angle, and some convenient number, as 50, on the other side to the same scale. Join a and b with f . With the same scale which was used in drawing the equilibrium polygon for the wheel loads, lay off the bending moments M_4 and M_5 due to dead load. Now assume a position of the live load, draw the closing line of the equilibrium polygon, and with the dividers transfer the bending moments due to the live load and lay them off above the others. If the position is correct, the lines ce and de , parallel respectively to af and bf , will intersect each other on the line of . If the head of the locomotive is too far to the left, they will intersect below the line. If oe be measured by the scale of moments and divided by 50 feet (assumed as above), the quotient will be the horizontal component of the stresses in U_4 and U_5 .




Fig. 106.

If portions of two trains cover certain panels at each end of the bridge, a stress will be caused in V_5 which is a little larger than the value given above, and which can be found as follows: Let the required positions of two trains approaching each other be that illustrated in Fig. 107. The diagonals in




Fig. 107.

the fifth panel are omitted, since there must be no stress in the diagonals of that panel for a maximum tension in V_5 , as proved in the preceding portion of this article. Let P_5 be the resultant of the loads transferred to the truss at panel points 5 and 6 by the floor system, together with the dead panel

loads at those points, and g its distance from the right support. Let c be the intersection of the chord members U_1 and L_1 , and d the intersection of U_2 and L_2 . If a section be passed through U_1 and L_2 , the stresses in those members hold in equilibrium the forces P_1 and the reaction B , and therefore their resultant. The resultant of the stresses in U_1 and L_2 passes through c ; and therefore the resultant R of P_1 and B must be equal and opposite to it, and applied at the same point. The value of R is readily found by taking moments about d , whence $R = P_1 g \div r$.

If a section be now passed cutting U_2 , V_1 , and L_2 , the stresses in these members hold in equilibrium the same forces P_1 and B as the stresses in U_1 and L_1 , since the dead load at the upper panel point 5 is zero in this case. Substituting R for P_1 and B , denoting the stress in V_1 by S , and taking moments about d , there results $-Rr' + Sk = 0$, whence $S = Rr' \div k = P_1 gr' \div kr$. But k , r , and r' are constant; therefore the position of the live load to give the tension in V_1 must be such as to render $P_1 g$ a maximum. This shows that the stress in V_1 is independent of the distribution of the train load on the left, and it may therefore consist of the rear portion of a preceding train.

Referring now to Fig. 108, which shows the truss diagram in position on the load line and moment diagram, the ordinate bf is the moment at the right support of the truss due to the locomotives of the right-hand train. If the chord $4i$ be produced to e , be will represent the moment of the live panel load at 4 about b as a center. The ordinate ef will therefore represent $P_1 g$, less the moment due to the dead panel loads at 5 and 6. As this last moment is constant, ef must be made a maximum. It is also evident that heavy loads should be placed at 5, and usually the head of the locomotive will not pass beyond the panel. The possible positions are therefore quite limited, and on applying the test it is found that when

wheel 3 is at panel point 5, $ef = 6330 - (3 \times 230) = 5640$. In this equation 6330 equals bf as read from the diagram, and 230 equals the ordinate $5i$. Similarly, for wheel 4 at 5,

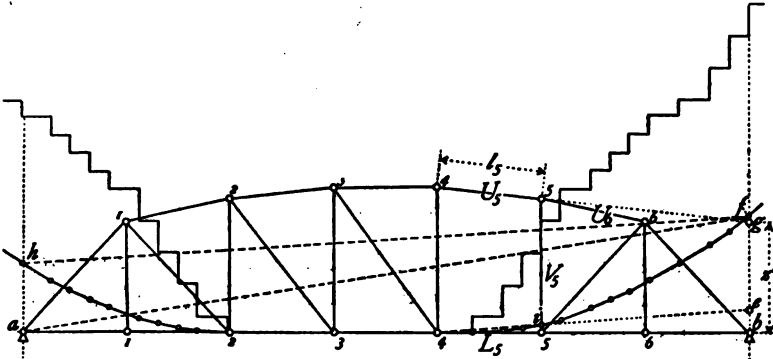


Fig. 108.

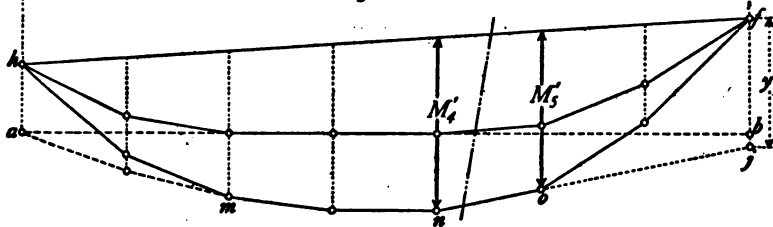


Fig. 109.

$ef = 7260 - 3(480) = 5820$, and for wheel 5 at 5, $ef = 8290 - (3 \times 830) = 5800$. In the required position, therefore, wheel 4 must be placed at panel point 5.

Assuming that the train on the left is also in its right position, the closing line of the equilibrium polygon is hf , while if that train is off the bridge the closing line is af . The equilibrium polygon for the truss is shown in Fig. 109, the ordinates at the panel points being the same as in Fig. 108, and all the sides straight lines. By adding the moments due to dead load below those which are due to live load the polygon becomes $hmnofh$. By Art. 7 the intersection of the sides no and hf produced (Fig. 109) is on the line of action of the resultant R of the forces on the right of the section, and

therefore this intersection lies in the same vertical as the intersection of U_4 and L_4 . The position of R was shown in Fig. 107. Let the intercept bg at the right support, between the chords U_4 and L_4 produced (Fig. 108), be denoted by z' and that in the same vertical between no and hf produced (Fig. 109) by y' , the depths of the truss at 4 and 5 by h_4 and h_5 . There follows, $M_4' : h_4 = M_5' : h_5 = y' : z'$, whence

$$\frac{M_4'}{h_4} = \frac{y'}{z'}$$

If the stress in U_4 be denoted by S' , and the angle between U_4 and a horizontal by α , and the length of U_4 by l_4 , p being the panel length,

$$S' = \frac{M_4'}{h_4 \cos \alpha} \quad \text{and} \quad \frac{p}{\cos \alpha} = l_4.$$

Substituting,

$$S' = \frac{y'}{z' \cos \alpha} = \frac{py'}{pz' \cos \alpha} = \frac{l_4}{z'} \cdot \frac{y'}{p}.$$

An inspection of Fig. 109 shows that in order to determine y' it is not necessary to know M_4' and M_5' , and therefore not necessary to consider either the weight or the position of the train on the left. When that train is not on the bridge the closing line is af , and therefore the corresponding bending moments M_4 and M_5 will also determine y' . Remembering that the moment bf (Fig. 108) for wheel 4 at panel point 5 was found to be 7260, that the moment $5i$ is 480, and that the bending moments at 4 and 5 for dead load are 4811 and 4010 thousand pound-feet respectively,

$$M_4 = \frac{1}{4} \times 7260 + 4811 = 8960,$$

and

$$M_5 = \frac{1}{4} \times 7260 - 480 + 4010 = 8716.$$

As M_1 and M_2 are respectively 3 and 2 panel lengths from the right support,

$$\frac{y'}{p} = \frac{(3 \times 8716) - (2 \times 8960)}{27} = 304.7 \text{ thousand pounds.}$$

The stress in U_1 can now be found by graphics in the following manner: On Fig. *c* of Plate V draw the line $7g'$ parallel to U_1 intersecting the vertical V_1 at g' ; join g' with the upper panel point 4; lay off $y' \div p = 304.7$ on V_1 as indicated, and draw ij parallel to $g4$. The line $j5$ represents the stress in U_1 . The force polygon for the upper panel point 5 can next be obtained by drawing jk parallel to U_1 . On measuring $5k$ by scale the stress in V_1 is found to be + 31.5 thousand pounds.

This result may be checked as follows: Let a stress diagram be drawn giving the stress in D_1' (Fig. 105) when the reaction at the right support is 1.0. It is found to be 1.017. By the method described in the preceding article, let the stress in D_1' be found for the above values of M_1 and M_2 . Its value is + 22.8. To reduce this stress to zero the reaction at b (Fig. 108) must be increased $22.8 \div 1.017 = 22.4$ thousand pounds. This requires a moment at the left support a of $22.4 \times 189 = 4234$ thousand pound-feet. If this is to be produced by a train approaching from the left, its wheel 1 must be about half a foot on the left of panel point 2, as shown in Fig. 108. If, however, it be produced by the rear end of a preceding train, the train must cover a distance of 65 feet from the left support. The bending moment $M_1' = 8960 + 3/7 \times 4234 = 10775$, and $M_2' = 8716 + 2/7 \times 4234 = 9926$. If these values are respectively divided by the depths $h_1 = 38$ and $h_2 = 35$ feet, each quotient gives the same horizontal component of 283.6 thousand pounds for U_1 and U_2 . See Fig. *c*, Plate V.

The greatest stress in D_1' was produced by wheel 3, being placed at 5. The construction for this position is also given

on the Plate, the resulting stress in V_1 being + 30.8 thousand pounds.

The stresses in the diagonals in the center panel become zero the second time when the live load covers the entire bridge, and therefore the greatest tension in V_1 or in V_3 occurs when U_1 has its maximum stress. By laying off $M_1 \div p = 178.2$, which is due to dead load, above d , and constructing the triangle fge the stress in V_1 is found to be + 44.3 thousand pounds. If it were attempted to apply the method outlined above, $y' \div p$ would be 609.8, which would give a stress in U_1 greater than that under full load, which is not possible; and if the position of the train approaching from the left, which reduces the stress in D_1 and D_1' to zero, were determined, it would be found to conflict with that of the other train. The maximum tension occurs under full load only for the vertical adjacent to a center panel, or for the middle vertical of a truss with an even number of panels.

The minimum stress in V_1 occurs under dead load only. The accompanying table gives the final minimum stresses after applying the correction on account of dividing the dead panel loads.

VERTICALS.	$V_1 = V_6$	$V_2 = V_5$	$V_3 = V_4$
From diagram.....	+ 29.7	+ 31.5	+ 44.3
Correction for division of dead panel loads.	- 8.1	- 8.1	- 8.1
Minimum stress.....	+ 21.6	+ 23.4	+ 36.2

If the number of panels in the truss were 9 or more, the second vertical from the right support would be adjacent to two panels requiring no counter bracing. In such cases the minimum stress in the vertical is obtained in exactly the same way as the maximum, except that the load covers only the smaller segment of the span.

It is apparent that to secure precise results the methods

outlined in the example of the four preceding articles, and illustrated on Plate V, must be drawn to a large scale. Results which shall answer all the purposes of design may, however, be readily secured with reasonable care on drawings which are not unwieldy in size.

Prob. 66. Find the minimum stresses in the verticals in Prob. 63 in Art. 51.

ART. 55. STRESSES DUE TO WIND.

The method of finding the stresses in the upper lateral system of a bridge whose trusses have broken upper chords is exactly the same as for horizontal chords after the panel loads due to the pressure of the wind on the trusses are computed.

In order to illustrate the method of obtaining the stresses in the trusses due to the wind, let the same bridge be employed whose dimensions were given in Art. 51, the distance between the centers of trusses being 16 feet. It is usually specified that for bridges of this span the upper lateral system shall be designed for a stationary wind force of 150 pounds per linear foot. For this example the wind load per panel is therefore $150 \times 27 = 4050$ pounds.

Now let the middle three panels of the upper lateral system be considered as separated from the end panels and supported

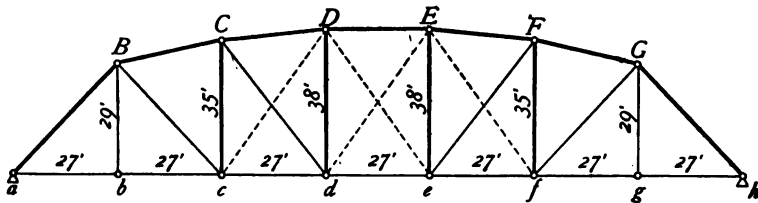


Fig. 110.

at C and F of the windward truss (see Fig. 110), and the corresponding points C' and F' of the leeward truss.

The panel loads at D and E tend to overturn this portion

of the upper lateral system, the overturning moment for each half being $4050(38 - 35) = 12\ 150$ pound-feet. This must equal the moment of the equal and opposite vertical reactions at C and C' or at F and F' , depending upon which half is considered. The lever arm of the couple formed by these reactions is 16 feet, the distance between the centers of trusses. Each reaction equals $12\ 150 \div 16 = 760$ pounds, those on the windward side being downward, and on the leeward side upward. The same vertical reactions would be caused by vertical loads of 760 pounds acting downward at D and E and upward at D' and E' . In addition to the vertical reactions referred to above there are also horizontal reactions of 4050 pounds at C and F . Hence the same stresses will be produced in the vertical trusses if the horizontal panel loads of 4050 pounds at D and E are replaced by vertical loads of 760 pounds, acting upward at D and E , and downward at D' and E' , together with horizontal wind panel loads of 4050 pounds applied at C and D respectively.

Next consider the entire upper lateral system, with the changes made as just indicated and supported at the points B , G , G' , and B' . Horizontal wind loads of $4050 + 4050 = 8100$ pounds are acting at C and F , and these produce an overturning moment in each half of the system of $8100(35 - 29) = 48\ 600$ pound-feet. These loads may therefore be replaced by vertical loads of $48\ 600 \div 16 = 3040$ pounds, acting upward at B and G and downward at B' and G' , together with horizontal wind loads of 8100 pounds at B and G respectively.

The end posts and portal bracing connect the upper lateral system to the supports of the bridge, and may be regarded as a part of it. The horizontal wind loads of $8100 + 4050 = 12\ 150$ pounds acting at B and G cause an overturning moment for each half of the bridge of $12\ 150 \times 29 = 352\ 350$ pound-feet, and may therefore be replaced by vertical loads

of $352\ 350 \div 16 = 22\ 020$ pounds, acting upward at B and G and downward at B' and G' , together with horizontal wind forces of 12 150 pounds applied at the support of each end of the bridge. It is generally assumed that the feet of the end posts react equally.

The above analysis shows that the upper lateral system transfers the horizontal wind loads directly to the supports, and that the stresses in the leeward truss due to the overturning moment of the wind pressure which is applied at the panel points of the same system may be obtained by applying vertical loads of 22 020 pounds at B' and G' , 3040 pounds at C' and F' , and 760 pounds at D' and E' respectively. Since the resulting stresses always act in conjunction with and are less than the dead load stresses, their values in the windward truss are the same as those in the leeward truss with the signs changed. Practically, the wind transfers a part of the dead load from the windward to the leeward truss.



If the upper chord were horizontal the stresses in the truss would be obtained by applying vertical loads only at B' and G' (or at B and G) equal to $3 \times 4050 \times 29 \div 16 = 22\ 020$ pounds. For the sake of simplicity the analysis in this article was made with the implied assumption that the specified wind pressure for the upper lateral system was concentrated at the windward panel points, and that the diagonals take only tension. The wind pressure should, however, be equally divided between the windward and leeward panel points, but the computed vertical panel loads will not be modified by it nor by the fact that the upper lateral system may be designed with stiff diagonals.

If the lower chord be some distance above the level of the bridge supports the wind loads of the lower lateral system will likewise produce an overturning moment. The wind pressure on the train also tends to overturn the bridge about an axis through its leeward supports. In obtaining the trans-

fer of load from the windward to the leeward supports of the bridge the lever arm of the wind pressure equals the difference in elevation between the center of pressure on the train and the axis of rotation. The elevation of the center of pressure is variously specified to be from $7\frac{1}{2}$ to $8\frac{1}{2}$ feet above the base of the rail. The vertical panel loads which may replace the wind pressure on the train in finding the stresses in the trusses must be applied at the panel points of the loaded chord and regarded as a moving load. Each of these panel loads equals the product of the wind pressure on one panel length of the train by the distance of the center of pressure above the plane of the lateral system divided by the distance between the trusses.

The stresses in the trusses, the floor, and lateral systems of a bridge due to the curvature of the track are treated in a paper by WARD BALDWIN in Transactions of the American Society of Civil Engineers, Vol. XXV, page 459, Nov. 1891, entitled "Stresses in Railway Bridges on Curves." The paper contains a practical example in which the stresses are computed.

Prob. 67. Find the stresses in the truss in Fig. 110 due to the wind panel loads as computed in this article. The left end of the truss is toward the north.

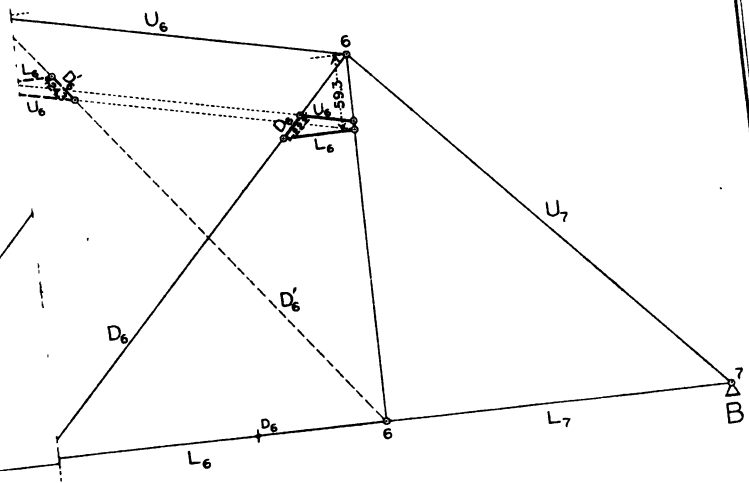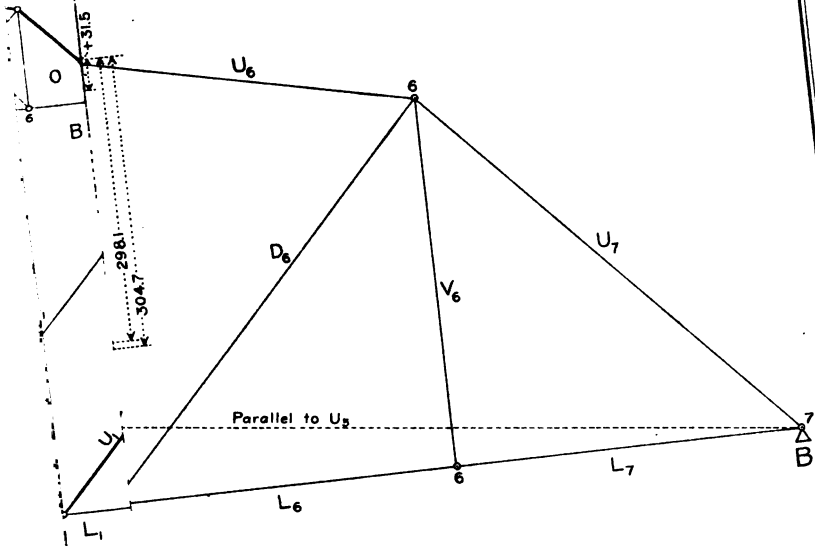



CHAPTER VI.

MISCELLANEOUS TRUSSES.

ART. 56. THE PEGRAM TRUSS.

The Pegram truss has a curved or broken upper chord, and posts whose angles with the vertical increase from the middle of the truss to its ends. The horizontal projection of the upper chord is about one and one-half panel lengths shorter than the lower chord, but both chords are divided into the same number of panels. The panel points of the upper chord lie upon the arc of a circle. The form, proportion, and relative economy of this type of truss is discussed by the inventor in *Engineering News*, Vol. XVIII, pages 414 and 432, December 10 and 17, 1887.

Fig. 111 shows the skeleton diagram of a Pegram truss of seven panels. On account of the inclined posts the notation is necessarily modified from that used in Chap. V. The

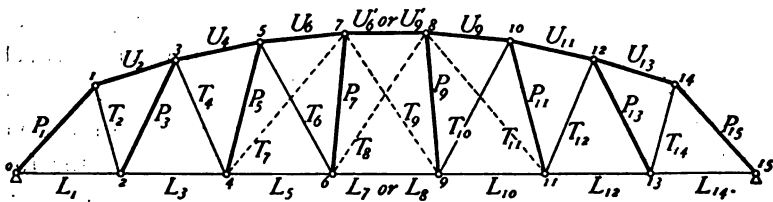


Fig. 111.

panel points are numbered in regular order from left to right. The subscript for any chord member is the number of the panel point which is the center of moments. The subscript for any post or tie is the panel point at the right extremity of

the member. The middle panel of the lower chord will be designated by L , or L_7 , according as its center of moments for a given position of the load is at 7 or 8. In order to distinguish the middle panel of the upper chord from the adjacent members which have their centers of moment at the points 6 or 9, the designating letters are primed.

When the center of moments for any chord member of a truss is not in the same vertical as a floor beam, the method of determining the position of the locomotive wheel loads and the corresponding maximum moment described in Art. 47 does not apply. In Part I, Art. 61, the required criterion for position,

$$P' + \frac{q}{p}Q = \frac{l'}{l}W,$$

was deduced, in which Q is the load in the panel cut by the vertical through the center of moments, P' the load on the left of this panel, W the whole load on the truss, q the horizontal distance from the center of moments to the left end of the panel containing Q , p the panel length, l' the distance of the center of moments from the left support, and l the span of the truss.

In order to satisfy this criterion a wheel has in most cases to be placed at the left end of the panel containing the aggregate load Q , although it will often be satisfied when a wheel is placed at the right end of this panel.

Fig. 112 shows the left end of a Pegram truss in position on the load line and moment diagram of the wheel loads for the maximum moment at the panel point 3. The line au produced passes through the point where the vertical at the right support cuts the load line. Wheel 4 is at the floor beam at panel point 2. The ordinate $4r$ represents the load $P' + Q$. If wheel 4 be just to the right of the floor beam the ordinate $2i$ or the equal ordinate mj represents P' , while

md represents $P' + \frac{q}{p}Q$. If, however, wheel 4 be just on the left of the floor beam, the ordinate $2h$ equals P' and mf equals $P' + \frac{q}{p}Q$. The ordinate me equals $\frac{l'}{l}W$ and the position is therefore correct when wheel 4 is at the floor beam and the point e falls between the points d and f where the lines ri and rh respectively cut the vertical through the

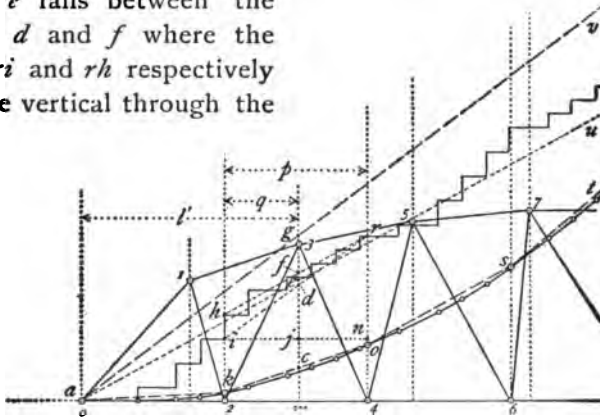


Fig. 112.

center of moments 3. The point r is at the intersection of the load line with the vertical through panel point 4.

With the load in this position the equilibrium polygon for the truss is composed of the straight sides ak, ko, os, st , etc., and the closing line av . The bending moment is therefore given by the ordinate cg . In a similar manner the positions of the live load and the corresponding moments are obtained for all the panel points of the upper chord of the given truss.

The position of the live load and the bending moments for the sections through the panel points of the lower chord are determined in the manner described in Art. 47. For those points the second term of the left-hand member of the above criterion for position becomes zero.

As an example a truss of seven panels will be used whose span is 207 ft. The horizontal projections of the posts P_1 ,

P_1 , P_2 , and P_3 are 22,500, 15,595, 9,336, and 3,467 feet respectively, while their vertical components measure 25,000, 32,349, 37,273, and 39,717 feet. The live load consists of WADDELL'S Class U. The dead load is estimated at 1050 pounds per linear foot per truss, 300 pounds being taken on the upper chord. As the average horizontal projection of the upper chords is 23.14 feet, the upper panel loads are $23.14 \times 300 = 6942$, or say 6950 pounds. The panel loads on the lower chord are $750 \times 207 \div 7 = 22180$, or say 22200 pounds.

The following table gives the data for all the live load chord stresses, the moments being expressed in units of a thousand pound-feet, the stresses in thousands of pounds, and the lever arms in feet:

CENTER OF MOMENTS.	WHEEL AT SECTION.	MOMENT AT RIGHT SUPPORT.	MOMENT AT SECTION.	BENDING MOMENT.	LEVER ARM.	STRESS.	CHORD MEMBER.
2	4	47 220	480	6 266	25.96	- 241.4	U_2
4	9	46 570	3 245	10 061	34.53	- 291.3	U_4
6	12	43 070	6 331	12 128	39.14	- 309.9	U_6
					39.717	- 305.4	U_8
	13	45 090	7 261	12 063			
9	14	35 420	8 291	11 949	39.717		
	15	38 500	10 099	11 901			
	16	40 470	11 286	11 840			
1	Wheel 4 at point 2			4 790	25.00	+ 191.6	L_1
3	Wheel 4 at point 2			8 270	32.349	+ 255.6	L_3
5	Wheel 13 at point 6			10 710	37.273	+ 287.3	L_5
7	Wheel 12 at point 6			12 090			
	Wheel 13 at point 6			12 000			
8	Wheel 16 at point 9			11 880	39.717	+ 299.1	L_8

The upper part of this table is arranged like that in Art. 47. For wheel 14 at the section through panel point 9, the shear is positive in the middle panel, while for the two preceding and the two succeeding positions the shear is negative. The moments at 9 for the last two positions cannot be used, since the diagonal in the middle panel which extends to 9 is not

then brought into action. The stresses in the fifth and sixth lines of the table are not computed, since the corresponding bending moments are less than 12 128 thousand pound-feet.

The bending moments in the lower part of the table were read directly from the diagram after drawing for each position the closing line of the equilibrium polygon, and the side of the polygon which lay below the center of moments. For the last three positions the shear in the middle panel is negative, and hence only the last moment can be used to obtain the stress in the lower chord of that panel.

Since the ties of this truss do not have equal horizontal projections as in the case treated in Chap. V, it is found to be more convenient to obtain the chord stresses directly by dividing the bending moments by the corresponding lever arms. As the lengths of all the members of the truss must be computed, the lever arms may be obtained by very little additional computation, or they may be measured on a large scale truss diagram with sufficient precision.

The stresses due to the dead load in the upper chord are -105.8 , -132.7 , -140.8 , and -139.4 thousand pounds, and in the lower chord, $+85.3$, $+116.4$, $+132.1$, and 139.4 thousand pounds.

In determining the positions of the live load for the web stresses, the points of division in each panel are found by the method explained in Art. 48, and the results are marked on the truss diagram on Plate VI. It will be observed that the points for the posts are on the right of those for the ties except in the case of T_{11} and P_{11} , where the counter tie is not required. The positions of the locomotive wheel loads and the remaining data required to construct the force polygons for the web stresses are given in the following table. The same units are employed as in the preceding table.

Let the student make a careful comparison between this table and those in Arts. 52 and 53. Attention is also called

to the fact that only for one member was more than one position of the load found to satisfy the criterion. The bending

WEB MEMBERS.	PANEL POINTS AT THE EXTREMITIES.	WHEEL AT PANEL POINT.	BENDING MOMENTS (M) AT EXTREMITIES OF WEB MEMBER.		LENGTH OF HORIZONTAL PROJECTION (ρ').	LEFT $\frac{M}{\rho'}$	RIGHT $\frac{M}{\rho'}$
			AT LEFT END.	AT RIGHT END.			
P_1	0-1	4 at 2	0	4 790	22.500	0	212.9
T_2	1-2	4 at 2	4 790	6 270	7.071	677.3	886.8
P_3	2-3	3 at 4	4 800	7 200	15.595	307.8	461.7
T_4	3-4	3 at 4	7 200	9 370	13.976	515.1	670.3
P_5	4-5	2 at 6	6 150	7 090	9.336	658.7	759.3
		3 at 6	6 600	7 580	9.336	706.8	811.9
T_6	5-6	3 at 6	7 580	9 675	20.235	374.6	478.1
P_7	6-7	2 at 9	5 560	5 750	3.467	1608	1659
T_8	7-9	3 at 9	6 340	7 060	26.104	242.9	304.9
T_{11}	8-11	3 at 11	4 040	4 980	30.038	122.3	150.8
T_{12}	11-12	3 at 13	2 010	2 090	13.976	143.8	149.5
P_{13}	12-13	3 at 13	2 090	2 180	15.595	134.0	139.8

moments in the fourth and fifth columns belong to the sections through the panel points given in the second column, and were read directly from the diagram like those in the lower part of the preceding table for chord stresses.

The ordinates whose values are given in the last two columns are laid off on the truss diagram on Plate VI, and the force polygons drawn as explained in the preceding chapter. On account of the great range of these values, and in order that the force polygons may be drawn to as large a scale as possible, different scales are employed. The original truss diagram was drawn to a scale of 6 feet to an inch, and the following scales were used for the force polygons in regular order from left to right: 60, 200, 100, 200, 200, 80, 300, 50, 30, 30, and 40 thousand pounds to an inch. The stress in P_5 for the position of wheel 2 at panel point 6 is - 66.2 thousand pounds, the corresponding force polygon not being shown on Plate VI.

The greatest live load tension in P_1 (or in P_6) occurs either when one or both of the adjacent upper chord members are subject to their maximum stresses. In this example their maximum stresses occur simultaneously when wheel 12 is at panel point 6, and while the tie T_6 is acting. The force triangle at panel point 7 therefore gives the corresponding live load stress in P_1 of + 32.0 thousand pounds.

The greatest tension in P_{11} occurs when wheel 5 is at panel point 11. The moment ordinate at the right support is 9475 and at 11 is 830, whence $P_6g = 9475 - (830 \times 3) = 6985$ (see Art. 54). The bending moments in the sections through 8 and 11 due to the dead load are 5526 and 4575 thousand pound-feet respectively. The bending moments due to the dead load plus the above live load on the right end of the truss are

$$M_8 = 5526 + \frac{114.819}{207} \cdot 9475 = 10782;$$

$$M_{11} = 4575 + \frac{1}{4} \cdot 9475 - 830 = 10514.$$

The value of y' is found graphically to be 10030 thousand pound-feet. The horizontal projection p' of U'_{11} is 23.702 feet, and hence $y' \div p' = 423.2$ thousand pounds. On laying this off on the vertical from panel point 10 to i , and drawing ij parallel to $g8$ as explained in Art. 54, $j-10$ gives a stress of - 333.7 thousand pounds in U'_{11} at the time when P_{11} is subject to its greatest tension. If the force polygon for panel point 10 be next constructed the stress in P_{11} will be found. At this point the stresses in U'_{11} , U_{11} , and P_{11} , together with the dead panel load of 6.95 thousand pounds, are in equilibrium. The polygon is drawn on the truss diagram, and gives a stress of + 31.4 thousand pounds in P_{11} .

The maximum and minimum stresses in the web members due to the dead and live loads may now be obtained in the usual manner:

For the ties,

	T_3	T_4	T_6	T_9	T_{11}
Dead load.....	+ 56.9	+ 33.7	+ 17.0	0	- 21.0
Live load from the right.....	+ 141.2	+ 108.0	+ 89.4	+ 74.5	+ 56.4
Live load from the left. ∴.....	0	- 19.3			
Maximum stress.....	+ 198.1	+ 141.7	+ 106.4	+ 74.5	+ 35.4
Minimum stress.....	+ 56.9	+ 14.4	0	0	0

For the posts,






	P_1	P_3	P_6	P_7
Dead load... ..	- 127.2	- 36.2	- 9.1	+ 7.4
Live load from the right.....	- 286.7	- 108.6	- 67.4	- 39.0
Live load from the left.....	0	+ 35.5		+ 32.0
Full live load.....				
Maximum stress.....	- 413.9	- 144.8	- 76.5	- 31.6
Minimum stress.....	- 127.2	- 0.7	[+ 31.4]	+ 39.4

It will be observed that if the live load were just a little greater that all the posts except the ones at the end of the truss would be subject to reversal of stress.

Prob. 68. A Pegram truss for a through railroad bridge has five panels, and a span of 150 feet. The horizontal projections of the posts are 20.000, 11.995, and 4.335 feet, while their vertical components are 22.000, 26.505, and 28.740 feet. The live load is WADDELL'S Class U. The dead load is 950 pounds per linear foot per truss, 275 pounds being taken on the upper chord. Find the maximum and minimum stresses in all the members.

ART. 57. THE PETIT TRUSS.

This type of truss is illustrated in the skeleton diagram of Fig. 113. It is derived from the Pratt truss with a curved upper chord by subdividing its panels by means of subverticals





and short diagonals. The vertical broken lines indicate struts which support the upper chord members at their middle points, and the corresponding horizontal lines serve to give lateral support in the plane of the truss to the long vertical posts. These are no real truss members, and are omitted in the diagrams employed in finding the stresses in the truss. In this case the counter diagonal eG does not coincide with the short diagonal FG , although in a number of trusses which have been erected the panel $eEGg$ is counterbraced by

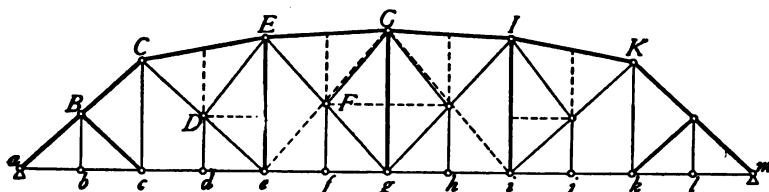


Fig. 113.

connecting the points e and F with a tie. The detail drawing of such a truss may be found in *Engineering News*, Vol. XXIII, page 249, March 15, 1890.

The stress in ef due to locomotive wheel loads is found in the same manner as for the Pratt truss, the center of moments being at E . The stress in fg equals that in ef , as may be seen from the force polygon for the panel point f .

By the method employed in Part I, Art. 61, a criterion for the position of the live load may be obtained which will give the stress in EG , and which indicates that the wheel loads from a to e , plus twice those from e to f , shall equal $Wl' \div l$, W being the whole load on the truss, l the span, and l' the distance from the left support to the center of moments g . To satisfy this criterion a wheel load must usually be placed at e , although sometimes it may be satisfied when a wheel is at f . In view of the examples given in Chap. V and in the preceding article, the student should have no difficulty in making the graphic construction required by this criterion.

As the section cutting EG and only two other members must pass on the left of f , the bending moment for EG must equal the moment of the left reaction of the truss, minus the moments of the loads transmitted by the floor system to the truss at the panel points a to e inclusive; or, in other words, the required bending moment exceeds that at the vertical section through g by the moment of the panel load at f . In the graphic determination, if the line joining the points where the verticals through e and f meet the moment curve of the live-load diagram, be produced to the vertical at g , and the ordinate from this point of intersection to the closing line be read off, the required moment will be obtained.

For the main tie EF , the position is found by the method given in Arts. 48 and 49, the auxiliary lines B_1 and B_2 of Fig. 98 being drawn in this case through the points e and f of Fig. 113. The force polygon is then constructed as in Art. 50 by using the moments at E and g , the points where the diagonal EF meets the upper and lower chords respectively.

The maximum stress in Ee occurs also when the head of the locomotive is in the panel ef , and hence there will be no simultaneous live-load stress in DE . The section through Ee must therefore cut CE and ef , and in finding the point of division in ef the chord member CE must be produced as in Fig. 98. If in any case the position for Ee should be the same as for EF , the stress in the former may be obtained from the force polygon already constructed for the latter by completing the polygon for the stresses meeting at the panel point E . If not, then a new force polygon for the simultaneous stress in EF must be drawn.

The panel load at f is suspended from F by the subvertical Ff , while the members EG , EF , and FG form a secondary truss which serves to transfer this panel load to the panel points E and G . As the panels are equal one half of the load at f is transferred to E and G respectively. Since the posts

Ee and Gg are both vertical, the stress in Fg is exactly the same as if the wheel loads in the panels ef and fg were transferred to the panel points e and g by a stringer whose span is eg . The stress in Fg is therefore found by the method given in Chap. V, after considering the members Ff and FG removed. The greatest stress in the counter tie eG (or Gi) is obtained in a similar manner to that in Fg .

The preceding statement also shows that the maximum stresses in Ff and FG occur when the floor beam reaction is a maximum. For consolidation locomotives this usually requires the second or third driver to be placed at the floor beam. If the panels are long, the reaction will be greater under the corresponding position of the second locomotive, for one or two of the tender wheels of the first locomotive may then be brought on the panel at the left. The tension in FG equals one half of the floor beam reaction multiplied by the secant of the angle which FG makes with the vertical.

The stress in the vertical Cc depends not only upon the floor beam reaction at c , but also upon that at b , one-half of the latter being transferred to c by the secondary truss $abcB$. By employing the same method as in Art. 46, the following formula may be deduced for the stress in Cc due to the locomotive loads:

$$S = \frac{M_d - \frac{1}{3}M_c}{p},$$

in which M_d is the moment of all the loads on the first three panels about d as a center, and M_c the moment of the loads on the first two panels about c as a center, and p the panel length of the three equal panels ab , bc , and cd . The values of M_c and M_d can be read off directly from the live-load moment diagram. The corresponding position of the load requires the wheel loads in the first two panels to be equal to two-thirds of the load on the three panels. It will be observed that this is the same position as that for the maxi-

imum moment at c of a beam or truss whose span is ad . As the live-load diagrams are always constructed with the head of the locomotive toward the left, the maximum stress should also be found in Kk and compared with that in Cc , the larger value being used for both members. The tension in Bb equals the floor-beam reaction at b .

If instead of the short tie FG a short strut eF be inserted, the auxiliary truss will then be $efgF$, which will transfer the panel load at f to the points e and g . The moment of the stress in fg about the center E will then be the bending moment in the vertical section through E plus the moment of the panel load at f . The corresponding criterion for position will require the wheel loads from a to f minus the wheels from f to g to equal $Wl' \div l$, in which W , l , and l' have the same significance as before, whence l' equals the horizontal distance from the left support to E , which is the center of moments. The stress in EG is the same as if the secondary truss were omitted, and the stringer extended from e to g . The methods described above for finding the stresses in EF and Fg will now have to be exchanged.

The construction of the stress diagram for the dead load offers no difficulty in either case, and will therefore not be illustrated.

The form of this truss as shown in Fig. 113 is sometimes modified by reducing the two panels at each end to one, thereby omitting the subverticals at b and l . This arrangement was used in the Susquehanna River bridge at Havre de Grace, Md. Another modification was adopted in the Merchants' bridge, at St. Louis, whereby the point B was raised so as to bring it into the curve of the upper chord. See Engineering News, Vol. XXII, page 578, Dec. 21, 1889.

Prob. 69. The truss in Fig. 113 has a span of 283 feet, the depths at C , E , and G being 42, 47, and $48\frac{3}{4}$ feet respectively. Find the stresses in all the members of the truss due

to WADDELL'S Compromise standard, Class U, the bridge having a single track.

ART. 58. THE BALTIMORE TRUSS.

The Baltimore truss is a special case of the Petit truss when the upper chord is horizontal. The chord stresses for both trusses are found in exactly the same manner. The method used for the web stresses of the Petit truss also apply to the Baltimore truss, but for most of the web members it is preferable to make the comparison with the methods employed for the Pratt truss.

If the upper chord in Fig. 113 were horizontal the stresses in EF and in Ee would be the same as if the truss were of the Pratt type with 14 panels, the load on the truss being 14 times the load in the panel ef . For the stress in Fg the load on the truss must equal 7 times the load in the panel, and the stress would be the same as if the truss were of the Pratt type with only 7 panels. The stresses in Ff and Bb are equal to those in the suspender of a Pratt truss having the same panel lengths, while those in Cc and FG are the same as for the Petit truss.

Prob. 70. A Baltimore truss of a single-track through bridge has the same span, number of panels, and live load as the truss in Prob. 69, its depth being 47 feet 2 inches. The counter-ties Ge and Gi are, however, omitted, and the members Eg and Ig counterbraced. Find the live load stresses in all the members.

ART. 59. UNSYMMETRICAL TRUSSES.

Fig. 114 represents the side elevation of the two unsymmetrical Pratt trusses of a through railroad bridge, together with the plans of the upper and lower lateral systems. The floor beams are perpendicular to the center line of the bridge, and they are placed at equal distances apart from each other,

and from the points midway between the bearings of the end stringers. The end posts are inclined so that their horizontal projections are equal to the distance between the floor beams, and this necessitates shortening the end panel of the upper chord at one end of each truss, and lengthening that at the

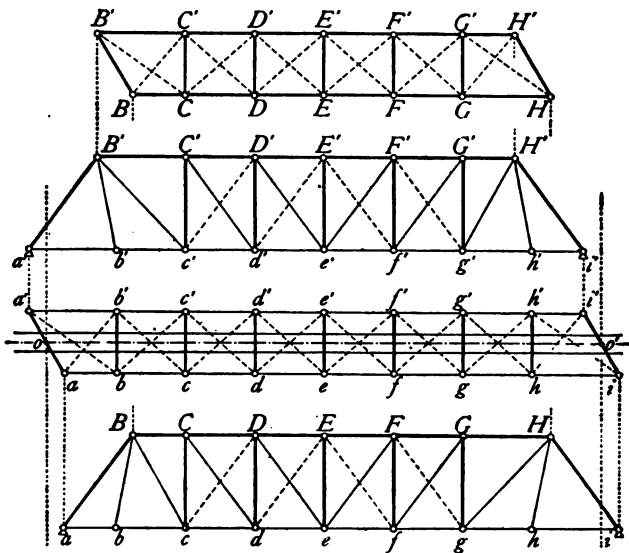


Fig. 114.

other end by an amount equal to one-half the longitudinal component of the skew. The end panels of both chords are therefore equal at the same end of each truss, and the suspenders are inclined. Sometimes the trusses of skew spans have been built whose end posts are not equally inclined, but this is very unusual.

As the two trusses are equal, but with their ends reversed, it is necessary to find the stresses in all the members of one truss for all the loads. Since the load line and equilibrium polygon for the locomotive wheel loads are usually arranged for the load advancing from the right, the live load stresses

are found in all the members of the left half of each truss, except the counters whose stresses are found in the right half.

The dead load stresses in the trusses and the stresses in the lateral systems due to that portion of the wind load which is regarded as stationary are as readily determined by the graphic method as for symmetrical trusses, although in the analytic method the numerical work of computation is materially increased.

The stresses in the lateral systems due to the pressure of the wind on the trusses are found by means of a stress diagram like Fig. 67 in Art. 32, but extended to all the members of each system. For the wind panel loads which are treated as a moving load (representing the pressure of the wind on the train), the stresses in the chords may also be obtained by a stress diagram, while that in the lateral struts and ties may be found by means of tables similar to those in Art. 32. The relation between the values in the different lines of the table are, however, not as simple as for trusses whose panels are all equal. For instance, if the nearer truss ai is on the windward side, the braces of the lower system brought into action are $ab'bc'cd'de'e \dots hh'i$, and a wind panel load at g will cause stresses in members on its left equal to those due to a panel load at h multiplied by the ratio of $gi \div hi$. These products are most conveniently obtained by graphical arithmetic (Art. 14).

Another method, which is preferable in most cases, is to draw a diagram giving the stresses in all the members for a reaction of 1.0 at the left support a , and then to multiply the stress in each brace by the corresponding reaction produced by the panel loads which make its stress a maximum. These reactions are most quickly determined by means of an equilibrium polygon whose closing line will shift as one panel load after another is taken away from the full load for which it is at first constructed.

The position of the wheel loads is obtained in the same way as for symmetrical trusses, it being assumed, however, that the loads are distributed along the center line oo' of the track as shown in Fig. 114, and that the trusses have their supports at o and o' . Although this method is approximate, it generally gives the correct position. In case a very slight shifting of the loads would dissatisfy the criterion, it may be well also to find the stress when the next wheel is placed at the corresponding panel point and compare the results.

In the bridge represented in Fig. 114 let the span be 146 feet, $bc = cd = de = ef = fg = gh = 18' 3''$, $ab = BC = 13' 7\frac{1}{2}''$, $hi = GH = 22' 10\frac{1}{2}''$, the width 16 feet between centres of chords, and the depth 24 feet. For the greatest stress in the chord members ab and bc due to WADDELL'S Class U (Art. 39) the required position is that with wheel 3 at panel point b . Fig. 115 shows the left portion of the truss diagram placed in this position on the load line and moment diagram of the live load. The intersection of the line ov with the

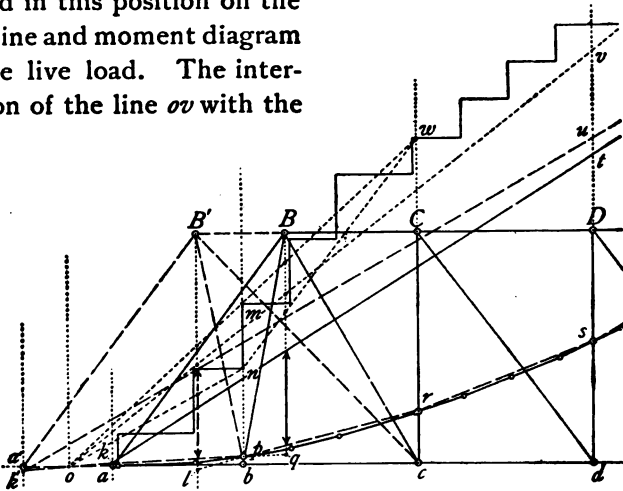


Fig. 115.

vertical through the center of moments B is seen to lie between the points where mw and nw cross the same vertical.

As the floor system distributes the load to the panel points of the truss the lower sides of the equilibrium polygon for the truss under this position of the load are the right lines, or chords, op , pr , rs , etc., the points o , p , r , and s being on the live load polygon. The point o is the regular panel length of 18' 3" on the left of b . The closing line of the polygon must end in a vertical through the left support of the truss at a , and therefore at the intersection k of the vertical ka with the line op . In a similar manner the right end of the closing line (not shown in Fig. 115) is located at the intersection of the chord or side of the equilibrium polygon whose extremities lie on the verticals through h and o' (see Fig. 114) with the vertical through i . The bending moment in the section through B is measured by the full line ordinate with arrows at its extremities (Fig. 115). This moment divided by the depth of the truss gives the stress in bc . As the stresses in ab and aB , however, hold in equilibrium only the reaction at a , the moment of the stress in ab about B is equal to the moment of the reaction, and hence is measured by the ordinate when produced to q , its intersection with the side op (or kp) produced.

The stress in the end post aB is preferably obtained by dividing the stress in ab by the sine of the angle which aB makes with the vertical. For the remaining web members except the suspenders, the only modification required of the method described in Art. 45 for trusses with equal panels is that the moment at the right support must be read to the point corresponding to that described in the preceding paragraph as the right end of the closing line of the equilibrium polygon for the truss.

The floor-beam reaction is the same as if the panel ab of the truss were equal to bc , for the deduction of the formula in Art. 46 indicates that the panel lengths introduced are really the spans of the corresponding stringers, and while usually

they are equal to the panel lengths of the truss, this is not always the case. The tension in Bb equals the product of the floor-beam reaction by the secant of the angle which Bb makes with the vertical.

Fig. 115 also shows the left-hand portion of the diagram of truss $a'B'H'i'$ superimposed upon the other. The closing line is $k'u$, k' being at the intersection of po produced with the vertical $a'k'$. The moment of the chord stress in $a'b'$ (b' coincides with b) is measured by the ordinate below B' and is indicated by arrows at its extremities. By producing this ordinate to l , on the chord rp produced, it gives the moment of the stress in $b'c'$.


It will be observed that the same position of the live load was used for the end chord members of both trusses. If the point o had been moved to a' the criterion would not have been satisfied by placing wheel 3 at b , but only by putting wheel 4 at b . The moment for the latter position, however, is less than that for the former.

Prob. 71. Find the maximum and minimum stresses in the above example due to the given live load and a dead load of 900 pounds per linear foot, one-fourth to be taken on the upper chord.

ART. 60. DOUBLE AND QUADRUPLE SYSTEMS.

For trusses having more than one system of webbing it is assumed that each system is affected only by the loads which it carries.

In the double system Warren truss in Fig. 116, the loads



P_1 , P_2 , and P_3 are carried by the full line diagonals, and the loads, Q_1 , Q_2 , Q_3 , and Q_4 by the diagonals drawn in broken

lines. The truss is therefore regarded as composed of two separate trusses having common chords. The stresses in each system may then be determined and the results combined. In this case, however, either the dead load stresses in all the members or the live load stresses in the chords may be found by means of one diagram. The reaction at the left support is in equilibrium with the stresses in Aa , Ba , and ab , but the compression in Aa is known, since it equals the reaction due only to the loads Q , thus leaving but two unknown stresses. The stress diagrams may therefore be readily constructed. The maximum live load stresses in the diagonals are obtained by considering each system separately.

For the Whipple truss in Fig. 117 (which is a double intersection truss of the Pratt type) both dead and live load

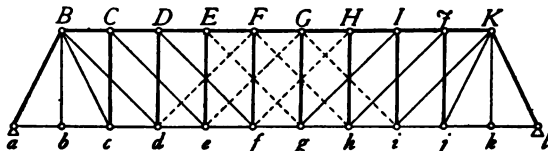


Fig. 117.

stresses must be found for each system, the division into systems being somewhat different, however, for the required stresses in the chords and web members. For the chord stresses the division may be made into the two symmetrical systems shown in Fig. 118, provided the live load is uniform

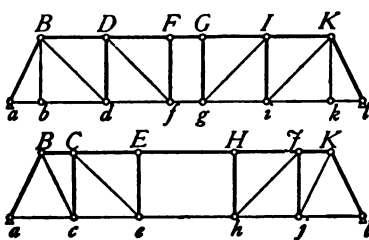


Fig. 118.

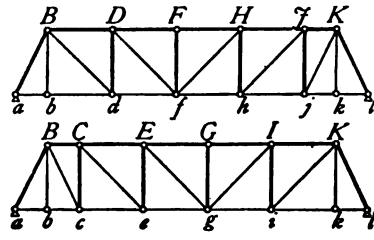


Fig. 119.

throughout. If the live load is not uniform, or if it consists of excess loads combined with a uniform train load, the division

may be made similar to that shown in Fig. 119, care being taken to insert those diagonals near the middle, which are in tension under the combined dead and live loads. If the stresses are obtained only for the left half of the truss, the excess loads may require an additional diagonal to slope downward toward the left in the lower diagram of Fig. 119. It is clear that only those dead and live load stresses in any chord member may be added together, which were obtained under the same conditions; that is, with the same diagonal of the given panel acting in each case.

When the division is made into systems, or component trusses, which are unsymmetrical, there is some ambiguity in the stresses due to the fact that the suspenders are attached to the panel points B and K which are common to both systems. As reasonable an assumption as any is to regard the panel loads at b and k to be equally divided between the two systems. The same stresses will, however, be obtained if both suspenders be considered as a part of only one and the same system, and this arrangement is also more convenient in finding the stresses.

If these two methods of division be compared for a uniform load throughout, the greatest difference in chord stresses is found to be not quite four per cent, most of them being much less. The difference may be reduced one-half by considering the suspender Bb as belonging only to that component truss which contains the adjacent diagonal Bc , and the suspender Kk as being a part of the system containing the diagonal Kj . This arrangement reduces the shear at the middle to the minimum value possible in each case, and requires the construction of only one stress diagram for the chord members, since one system equals the other with its ends reversed.

For the stresses in the web members the systems are divided as in Fig. 120, all the ties sloping one way except those near the right end, where it is certain that no counters are needed.

Only the loads supported by one of the systems are considered in finding the stresses due to both dead and live loads in any web member of that system. The method employed is that

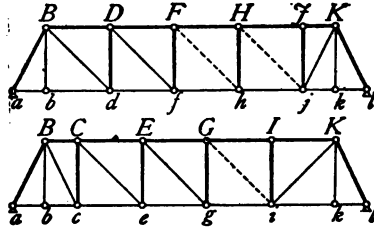


Fig. 120.

of Art. 30, the labor of tabulation being materially lessened by noticing the general statements made in that article in regard to the maximum and minimum stresses in web members. On account of the ambiguity in stresses the panel loads at b and k may be placed on either system, so as to produce the maximum and minimum stresses in any given web member.

When one excess load is used in connection with uniform panel live loads, it must be placed on that system which gives the greatest chord stresses; and for two excess loads the first may be on one system and the second on the other, depending upon their distance apart and the panel length. For maximum stresses in the webbing the excess loads are always placed at the head of the train.

If concentrated wheel loads are to be employed it will be best to always place the first driver at the panel point. Each system is regarded as acting independently, and as being strained only by the loads transferred to it by the stringers and floor beams. As part of the weight of the pilot is carried by the stringer to the other system, that part is disregarded in obtaining the stresses in the bracing. For the chord stresses the locomotives are so placed as to produce the greatest moment at the middle of the truss, and the weights

transferred to each system are used only in determining the chord stresses for that system.

A quadruple Warren truss or lattice girder is treated in

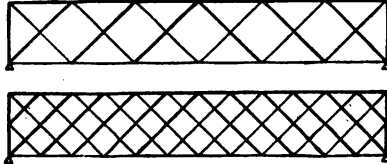


Fig. 121.

a similar manner to the double system Warren, and also requires but one diagram for dead load.

Prob. 72. A double system Warren truss of 100 feet span has 10 panels, and is 10 feet deep. The dead load per linear foot per truss is 560 pounds, and the train load 1800 pounds, which is preceded by two heavy locomotive panel loads of 65 000 pounds each. Find the maximum and minimum stresses in all the members.

ART. 61. THE GREINER TRUSS.

The truss shown in Fig. 122 was designed in 1894 by J. O. GREINER, Engineer of Bridges of the Baltimore and Ohio Railroad, for overhead highway purposes so as to be adapted




Fig. 122.

to the use of material taken out of old bridges combined with rails worn out in track service. It consists essentially of a bowstring truss with a horizontal upper chord combined with a Pratt truss whose diagonal ties are omitted, so that the supports of the former are at the upper ends of the end posts of the latter.

The stresses in the web members above the bowstring

$Bc'de'F$ are first determined by regarding them as members of the bowstring truss only, the supports being at B and F . The stresses in the end posts are the same as if the truss were of the usual Pratt type not in combination with the bowstring, while the stresses in the verticals Bb , $c'c$, $e'e$, and Ff are the corresponding floor-beam reactions.

The stress in any member of the upper chord BF is the sum of its stresses when considered successively as a member of the bowstring and Pratt systems, the load in the second case being the panel loads at b and f , together with loads at B and F equal to the reactions in the first case. This stress is a maximum when the load covers the entire truss and its position satisfies the same criterion, which would be used if the truss were of the pure Pratt type. The corresponding stresses in the bowstring $Bc'de'F$, and in the lower chord are easily found, as each of these chords belongs only to one of the component trusses.

Since the diagonal bracing of the Pratt truss is replaced by the bowstring truss, it is necessary not only to determine the stresses in each system separately, but also to consider the effect on the latter when the load on the former is not symmetrically disposed. As the panel points B , d , and F are common to both systems, the Pratt truss may first be regarded as having counterbraced long diagonals Bd and dF , and after the stresses in Bd and dF are found for the unequal loads transferred to B and F , or the panel loads at b and f , or both of these conditions combined, the stress in each of these members may be replaced by two equal and opposite external forces applied at its extremities, as was done in Art. 33, Fig. 69, in replacing the initial tension in the counters. As the stress in any case will be compression in one and tension in the other long diagonal, care must be taken to give the equivalent external forces the proper direction. The stresses in the bowstring truss due to these forces must then

be combined with those obtained by treating each system independently. Attention is again called to the important fact stated in the preceding article, that only those stresses must be combined which occur simultaneously under the same conditions.

If the dead and live loads are uniform and the bowstring is parabolic, the maximum stresses in the two horizontal chords are uniform throughout. This fact indicates why this type of truss is adapted to the use of track rails in these chords. The details of a truss of this type, in which, however, the parabola is in compression, were published in the Railroad Gazette, Vol. XXVII, page 602, Sept. 13, 1895.

Prob. 73. A highway bridge with a clear roadway of 15 feet has a span of 57 feet. The truss is of the same form and number of panels as Fig. 122, and its depth is 7 feet. Find the stresses due to a live load of 80 pounds per square foot.

ART. 62. HORIZONTAL SHEAR IN A BEAM.

Let it be required to construct a diagram showing the distribution of the horizontal shear in a beam. This may be conveniently illustrated by an example, such as occurs in the design of a deepened beam. A deepened beam consists of two timbers of rectangular cross-section placed above each other and united by keys or brace blocks so as to make the timbers act like a single stick. By this means the combined strength of the timbers is double that secured when they act separately.

Let the loads to be supported exclusive of the weight of the beam consist of three concentrated loads of 4000, 8000, and 6000 pounds respectively, and a uniformly distributed load of 2000 pounds per linear foot, extending over a portion of the span as indicated in Fig. 123. A single bending moment diagram for both concentrated and uniform loads

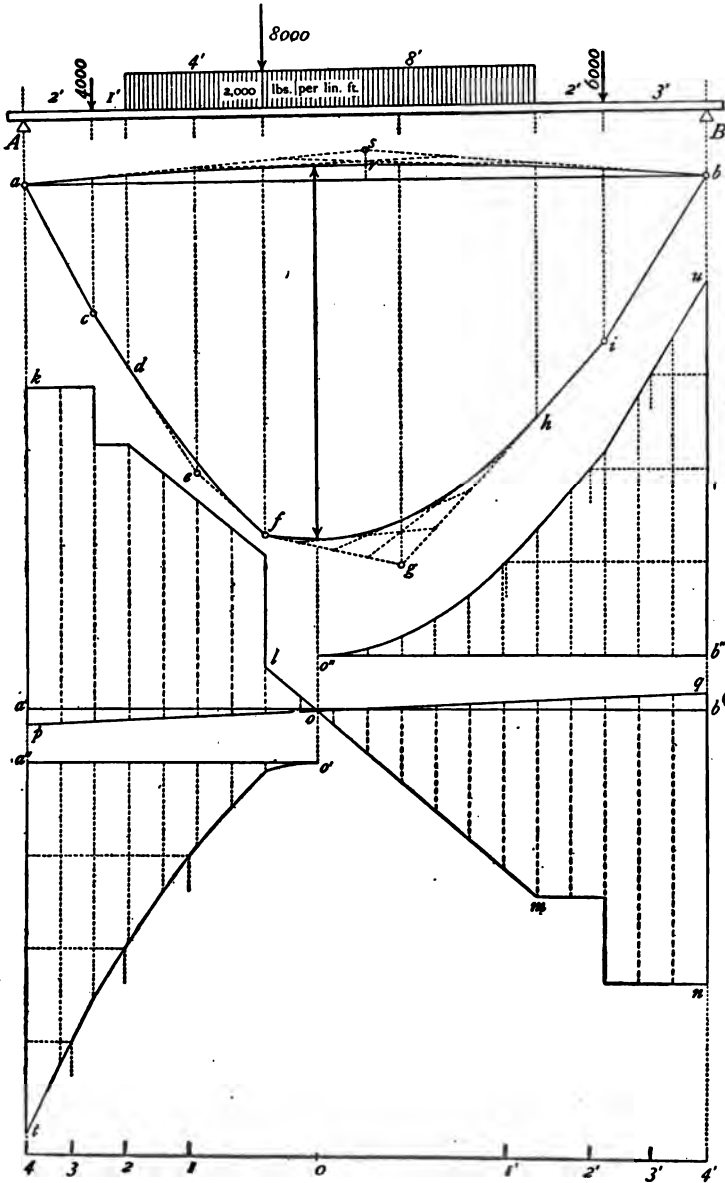


Fig. 123.

may be constructed by treating separately the portions of the uniform load which lie between the concentrated loads. The loads are taken in succession from left to right and laid off on the load line (not shown). The left reaction A is found by computation to be 22 900 pounds, and by laying this off on the load line the closing line of the equilibrium polygon may be made horizontal, if so desired, by taking the pole directly opposite the point of division of the reactions (see Arts. 9 and 11). The equilibrium polygon $acefgiba$ is first drawn by regarding the portions of the uniform load as concentrated at their centres of gravity. The final form is then obtained from this by constructing a parabola (Art. 10), tangent to the right lines ce and ef at the points d and f respectively, these points being directly below the extremities of the 4-foot portion, and a second parabola tangent to fg and gi at the points f and h .

The vertical shear diagram $a'k . . . lm . . nb'$ is drawn next. The shear passes through zero, where lm crosses $a'b'$, and on measuring the moment ordinate directly above this it is found to be 126 400 pound-feet. If b be the breadth and d the depth of the rectangular section of the beam, and 875 pounds per square inch the working unit stress in the outer fibres,

$$bd^2 = (126\,400 \times 12 \times 6) \div 875 = 1\,040 \text{ inches}^2.$$

If b be assumed as about $\frac{1}{3}d$, the beam will require two timbers 14×14 inches in section.

The weight of these timbers for a length equal to the span, at 3 pounds per foot board measure, equals 1960, or say 2000 pounds. The bending moment at the middle of the beam due to this weight is 5000 pound-feet. The corresponding moment diagram is drawn as explained in Art. 10 by making the parabola arb tangent to as and sb , the ordinate at s being $2 \times 5000 = 10\,000$ pound-feet. The shear diagram $a'pqb'$ for the weight of the beam is added to the other by laying off

the reactions in the opposite direction from the axis $a'b'$. The shear due to all the loads passes through zero at o where lm crosses pq , which is a little to the right of the point found before, and is 8.52 feet from the left support. The maximum bending moment directly above this point is now measured, and its value of 131 300 pound-feet obtained. As the resisting moment of the beam slightly exceeds this amount no correction is necessary.

If S_h is the unit horizontal shear, and V the vertical shear in any section of the beam, b and d the breadth and depth of the rectangular cross-section, the following relation is given by mechanics (Mechanics of Materials, Art. 78).

$$S_h = \frac{3}{2} \cdot \frac{V}{bd}.$$

In order to obtain the horizontal shear for a distance dx along the beam, S_h must be multiplied by bdx , giving

$$S_h bdx = \frac{3}{2d} \cdot Vdx.$$

If the total horizontal shear be required between any two sections of the beam, it is necessary to integrate this expression between the given limits of x . V is a function of x , and the integral of Vdx is the area of the vertical shear diagram between the given sections.

The total horizontal shear between a' (the left support) and o is $\frac{3}{2d} \cdot M_{\max.}$, since $\int Vdx = \int dM = M$. Substituting the values found above, the total horizontal shear for either the portion $a'o$, or ob' equals $(3 \times 131\ 300 \times 12) \div (2 \times 28) = 84\ 420$ pounds. If four keys or brace blocks of equal strength are to be employed to resist this shear, each block must be designed to take a pressure of 21 105 pounds. In order to determine their location, it is necessary to divide the vertical shear diagram on each side of the zero shear into four equal

parts. This is most readily done by dividing it into narrow strips, say a foot wide by scale, finding the area of each one, and, beginning at the point o , adding each area to the sum of the preceding ones. The total area should equal the maximum moment. These areas are laid off as ordinates on the axis $a''o'$ in such a way that the length of the ordinate at any section of the beam represents the area of the vertical shear diagram from that section to the point of zero shear. By dividing the last ordinate $a''t$ into four equal parts and drawing parallels to $a''o'$ through these points as indicated by broken lines, their intersection with the curve passing through the extremities of the ordinates gives the positions required.

The corresponding diagram for the right-hand portion is drawn above the axis $o''b''$. All the positions of the brace blocks are marked on the bottom line of Fig. 123. Numbers 1, 2, and 3 are respectively 4' 9", 2' 11", and 1' 4 $\frac{1}{2}$ " from 4, which is at the left support; while numbers 1', 2', and 3' are 5' 10 $\frac{1}{2}$ ", 3' 5", and 1' 7 $\frac{1}{2}$ " from 4' at the right support. It will be observed that in the middle portion of the beam no brace blocks are required in this case for almost one-half of the span.

When moving loads are substituted for stationary loads the length of the middle space is materially reduced, for in that case the maximum horizontal shear in any section does not occur when the load covers the entire beam except for the sections at the supports. If the cross-section of the beam is not uniform, it is necessary to construct the diagram so that the ordinates shall represent the corresponding sums of the horizontal shears directly. By using the general form of the equation the distribution of the horizontal shear in a beam of any cross-section may be similarly shown by a diagram.

Prob. 74. Two deepened beams having an effective span of 22 feet carry a single track railway across a culvert. The weight of the track is to be assumed at 400 pounds per linear

foot, and the live load at 3600 pounds per linear foot. The beams are to be of timber weighing 45 pounds per cubic foot, and with an allowable unit stress in the outer fibers of 1500 pounds per square inch. Find the positions of the brace blocks or keys, provided eight are used in each beam.

ART. 63. ROOF TRUSS WITH COUNTERBRACES.

Fig. 124 shows the skeleton diagram of a roof truss with straight upper chords and a curved lower chord. The upper chord on each side is divided into six equal panels, and at the panel point marked 2 the strut is normal to the upper chord. The end panels of the lower chord are parallel to the adjacent upper chord members and the panel points 1, 2, . . . 5 . . . 2', 1' lie on the arc of a circle. With the exception of the end ones, the lower chord members are also equal. The ventilator covers a panel on each side of the peak.

The dead panel loads 1 to 7 on the upper chord are 2500, 3350, 3350, 3350, 2750, 2150, and 3600 pounds, and the corresponding loads 0 to 5 on the lower chord are 1400, 600, 600, 600, 600, and 600 pounds, somewhat less than half the weight of the truss being regarded as concentrated at the panel points of the lower chord. The snow panel loads are 2700 pounds, excepting those at 1, 5, and 6 which are 1350 pounds. The horizontal wind pressure against the vertical side 0—1 is 5600 pounds, and against 5—6 is 4800 pounds. The normal wind panel load is 6300 pounds, distributed to the panel points in the usual manner.

The stress diagrams are drawn at first for the truss with its counterbraces omitted as described in Art. 17, the additions required on account of the counters (in this example, counter-ties) being made afterwards. Only one of the stress diagrams is shown, that due to wind on the fixed side of the truss being given in Fig. 125. As the direction of the reaction at the fixed end is not known, the equilibrium polygon used to de-

termine the reactions must have its left-hand vertex at that support and its right-hand vertex on the vertical line of action of the reaction of the right support. To reduce the number of sides of the equilibrium polygon, and thereby to secure greater accuracy, it is desirable to concentrate the wind pressures on the two vertical and the two inclined surfaces at their respective centers. Should this arrangement cause a vertex of the equilibrium polygon to fall beyond the limits of the drawing even with the most favorable position of the

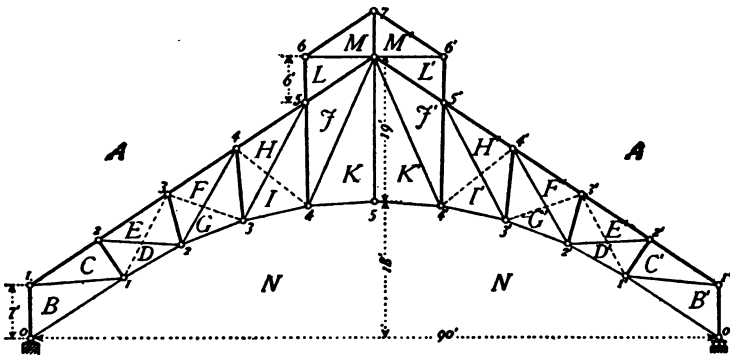


Fig. 124.

pole, it may be remedied by replacing the horizontal and normal pressures on the ventilator by their resultant. To avoid ambiguity in stress, the member AM' is attached to the panel point 7 so as not to receive or transmit any direct stress due to the wind.

To determine the stresses in the members adjacent to the second panel of the truss when the counter-tie DE acts, imagine the main diagonal removed and complete the corresponding force polygon for the panel points at its extremities, the additional lines required being made with short dashes instead of full lines. In a similar manner the additions are made due to the counters FG , HI , and those in the other half of the truss. It will be observed, for instance, that the polygon $hhii$ in the stress diagram has all of its sides respec-

tively parallel to the members of the panel containing the diagonal ties HI , while the two points marked i are on the same parallel to NI , and the two points h are on the same parallel to AH .

The stress in AH when the counter acts is represented by the shorter ah , while its stress when the main tie acts is the longer ah , as is evident at a glance on observing with which point h the broken line hi or the full line hi is connected. As the lines in the stress dia-

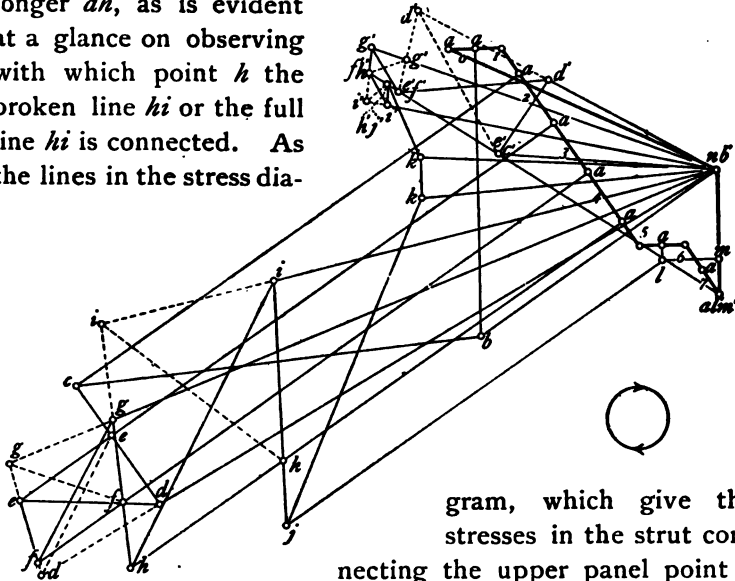


Fig. 125

gram, which give the stresses in the strut connecting the upper panel point 4 with the lower panel point 3,

have the same small or lower-case letters at their extremities as the capitals which designate the spaces adjacent to the strut, an inspection of the truss diagram will indicate which letters are to be used in any given case. When the counter acts on the left and the main tie on the right the strut is designated as FH and the corresponding stress is fh . If the counters act on both sides the strut is FI and its stress fi . The character of the lines representing the stresses in the main and counter ties afford a check against errors, for the stress diagram above shows that gi is the stress

in the strut when the acting adjacent ties are the main tie FG , and the counter tie HI . As an additional example, the stress in the next strut to the left is eg when the acting adjacent ties are the main DE and the counter FG .

Before measuring the stresses in the chords and struts the stresses in the main and counter ties are tabulated so as to determine how many counters are actually required. The following tables give all the stresses for the ties in three panels and the maximum and minimum stresses in the remaining ties, the stresses being expressed in units of one thousand pounds.

TIES.	DE		FG		HI	
	MAIN.	COUNTER.	MAIN.	COUNTER.	MAIN.	COUNTER.
Dead load.....	+ 17.8	- 19.8	+ 1.3	- 1.0	+ 14.5	- 10.3
Snow load.....	+ 10.8	- 12.0	+ 1.2	- 0.9	+ 9.4	- 6.7
Wind on fixed side.....	+ 14.8	- 16.4	+ 16.8	- 12.6	+ 33.7	- 23.9
Wind on free side.....	- 2.4	+ 2.7	- 8.1	+ 6.1	- 12.7	+ 9.0
Maximum.....	+ 43.4	0	+ 19.3	+ 5.1	+ 57.6	0
Minimum.....	+ 15.4	0	0	0	+ 1.8	0

TIES.	BC	$B'C'$	$D'E'$	$F'G'$ (m)	$F'G'$ (c)	$H'I'$	$J'K'$	JK
Maximum.....	+ 98.1	+ 78.4	+ 44.3	+ 16.4	+ 3.1	+ 40.8	+ 47.1	+ 68.3
Minimum.....	+ 24.4	+ 34.1	+ 14.3	0	0	+ 14.5	+ 18.9	+ 5.9

These tables show that only one panel in each half of the truss needs counterbracing.

The following tables give all the stresses in four chord

CHORD MEMBERS.	NB	ND	NG		AF	
			MAIN.	COUNTER.	MAIN.	COUNTER.
Dead load.....	0	+ 30.5	+ 46.0	+ 45.9	- 52.4	- 51.5
Snow load.....	0	+ 18.9	+ 27.8	+ 28.7	- 31.9	- 31.2
Wind on fixed side.....	+ 30.1	+ 67.8	+ 68.3	+ 80.2	- 70.4	- 59.4
Wind on free side.....	- 33.5	- 42.2	- 37.7	- 43.5	+ 13.6	+ 8.3
Maximum.....	- 33.5	+ 117.2	+ 142.1	—	- 154.7	—
Minimum.....	+ 30.1	- 11.7	—	+ 3.4	—	- 43.2

CHORD MEMBERS.	AC	AC'	AE	AE'	AH	AH'	JL	J'L'
Maximum.....	-122.7	-93.8	-154.3	-125.7	-144.4	-125.4	-116.2	-109.2
Minimum.....	-29.2	-40.8	-25.4	-53.3	-42.9	-51.2	-41.7	-42.7

CHORD MEMBERS.	AF'	NB'	ND'	NG'	NI	NI'	NK = NK'
Maximum.....	-126.0	-3.3	+69.4	+110.0	+106.3	+93.7	+75.1
Minimum.....	-52.4	0	+30.5	+38.0	+7.1	+19.6	+4.5

members, and the maximum and minimum stresses in the others. These tables indicate that two members of the lower chord are subject to both tension and compression, and must be designed accordingly.

Before measuring the stresses in the struts or posts it is desirable to prepare a table showing which diagonals are acting under the six possible combinations of load. Such a table for the ties *FG* and *F'G'* is shown below, the acting tie being indicated by an asterisk. It being remembered that no counters act in any other panels, it is apparent that the stresses to be obtained from the diagrams for the posts of the counterbraced panels are those given in the first one of the

	<i>EF</i>		<i>GH</i>		<i>G'H'</i>		<i>E'F'</i>	
	m.	c.	m.	c.	m.	c.	m.	c.
Dead load.....	-3.0		-3.8		-3.8		-3.0	
Snow load.....	-2.2		-3.1		-3.1		-2.2	
Wind on fixed side..	-2.4		-3.1		-3.1		-2.4	
Wind on free side...	-1.6		-2.5		-2.5		-1.6	
	-6.7		-15.6		0		-3.5	
	-5.2		0		-14.2		-6.7	

	<i>FG</i>		<i>F'G'</i>		<i>EF</i>	<i>GH</i>	<i>G'H'</i>	<i>E'F'</i>
	m.	c.	m.	c.				
Dead load.....	*		*		-3.0	-3.8	-3.8	-3.0
Dead + snow loads. . .	*		*		-5.4	-6.9	-6.9	-5.4
Dead + wind on fixed side	*			*	-9.7	-19.4	-3.1	-5.7
Dead + snow + wind fixed	*			*	-12.1	-22.5	-5.6	-7.3
Dead + wind on free side		*	*		-7.4	-3.1	-18.0	-9.7
Dead + snow + wind free		*	*		-9.0	-5.6	-21.1	-12.1
Maximum.....					-12.1	-22.5	-21.1	-12.1
Minimum.....					-3.0	-3.1	-3.1	-3.0

following tables. The ties which act on each side of the posts are indicated by m and c for the main and counter diagonals respectively. In some trusses three or four stresses may be required in some of the posts for the dead and snow loads and two for the wind loads. From this data the second portion of the last table may now be filled out, and the maximum and minimum stresses selected by inspection. It will be observed that the final values for EF are the same as for $E'F'$, and that for GH and $G'H'$ the minimum stresses are equal, while the maximum ones differ but slightly.

If the counter FG were omitted, and the main tie FG were then replaced by a member which could take both tension and compression, it would change the minimum stress in GH to $+0.4$, while if the main tie were omitted and the counter replaced by a counterbraced member it would change the maximum in GH to -12.7 , the maximum in EF to -9.0 , and the minimum in EF to $+1.8$ thousand pounds. It would seem therefore that it would be preferable to counterbrace the panels in this case instead of the members that would otherwise require it.

The following table gives the stresses in the remaining posts and in the middle suspender.

	AB	AB'	CD	$C'D'$	IJ	$I'J'$	KK'
Maximum... ..	- 65.4	- 48.6	- 37.2	- 31.5	- 44.6	- 35.2	+ 11.5
Minimum... ..	- 16.5	- 22.0	- 12.0	- 13.4	- 3.7	- 10.9	+ 1.3

Prob. 75. Find the maximum and minimum stresses in the crescent roof-truss treated in Art. 24, provided the panels be counterbraced with diagonals which take compression only.

ART. 64. A FERRIS WHEEL WITH TENSILE SPOKES.

The skeleton diagram of a small Ferris wheel with eight apexes and supported at the hub is given in Fig. 126. The broken circular line indicates the rack where the power is

applied to rotate the wheel. The spokes are designed to take only tension, and equal loads are applied at all the apices. The crown of the wheel tends to sag under the influence of the load at apex 1; but as this would produce compression in the spoke IB it will not act, and therefore the load is sup-

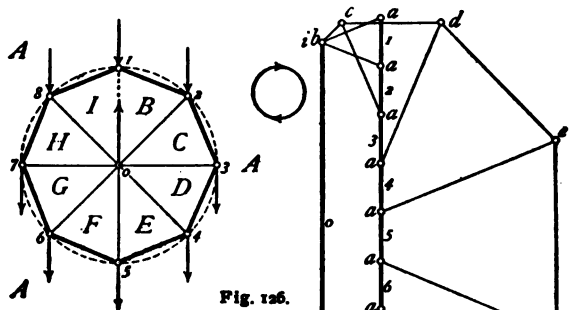


Fig. 126.

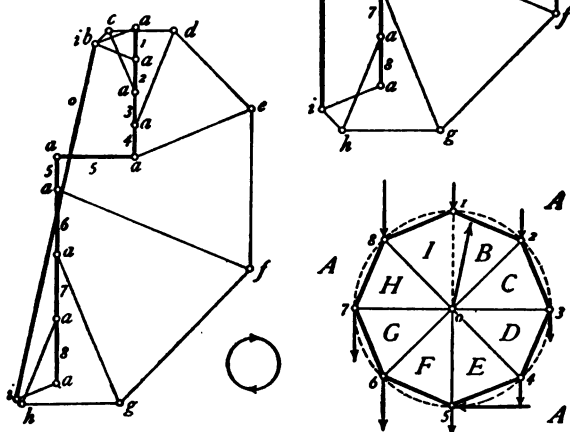


Fig. 127.

ported by the segments AI and AB of the rim. These stresses are obtained by constructing the force polygon for the apex 1 as shown in the stress diagram at the right. The force polygons for the remaining apices may now be constructed in regular order. The long vertical ib is the reaction of the support and the diagram shows that it is in equilibrium

with the stresses in all the spokes, which truly expresses the relation of the forces at the hub. In this article the resistance due to friction in the bearings is not taken into account.

An examination of this diagram shows that under uniform load the stresses in the spokes and in the segments of the rim gradually increase from the top to the bottom of the wheel, those in the rim being compression throughout. When a segment of the rim is in a horizontal position at the top of the wheel its stress is $-1.0P$, P being the apex load. The stress diagram for this position is not given. As it revolves its stress gradually increases to the maximum value of $-3.92P$ when the segment reaches the position of AE , the stress now remains unchanged until the position of AF is reached, and then gradually diminishes until the segment is again horizontal at the top. If the wheel had 16 spokes the compression in any segment of the rim would vary between the limits $2.414P$ and $7.689P$.

The stress in any spoke remains zero during the interval between its two upper positions which make an angle with the vertical equal to one-half the angle between the spokes, and then gradually increases until it reaches its maximum value of $+4P$, when the spoke is below the hub in a vertical position. It is interesting to observe that the maximum stress in any spoke is independent of the number of spokes when that number is not less than four. The construction of the diagram also indicates that the stresses in both rim and spokes are independent of the size of the wheel, except so far as the apex loads may depend upon it.

Fig. 127 gives the wheel and stress diagrams for the case when only three of the observation cars are occupied. The horizontal reaction applied on the circular rack which is used to rotate the wheel is found by equating to zero the sum of the moments of all the external forces with reference to the centre of rotation of the wheel. In the stress diagram the

points i and b which coincide indicate no stress in the vertical spoke IB , while the inclined line ib is the reaction IB of the supports, for, since the spoke has no stress the letter I really applies to the entire space on the left of the inclined arrow designating the reaction. It will be noticed that most of the stresses on the loaded side are considerably greater than those on the other.

The Ferris wheel at the World's Columbian Exposition in 1893 was 250 feet in diameter and had 36 spokes. An article on this subject applying the graphic method to water wheels of a given type as well as to other structures, and including a description of the main features of a wheel of the same magnitude as that at the Exposition, but designed so that its stresses should be statically determinate, may be found in *Zeitschrift für Bauwesen*, Vol. XLIV, page 586 (1894).

Prob. 76. Determine the stresses in all the members of a Ferris wheel with 8 tensile spokes for a load P at each apex, when one of the spokes is vertical, and also when one of the rim segments is horizontal.

ART. 65. A BICYCLE WHEEL WITH TENSILE SPOKES.

Bicycle wheels are usually constructed with spokes of very light steel rods and stiff rims of metal or wood. The number of spokes is generally 32. A wheel with one-half that number of spokes is represented in Fig. 128. It carries a load W at the hub, and is subject to an equal reaction at the point where it rests upon the ground.

The reaction BC tends to produce compression in the spoke attached to the same point of the rim, but as it can take only tension it will not act, and hence may be considered as removed for the time being. The force triangle abc accordingly expresses the condition of equilibrium at apex I between the reaction BC and the direct stresses in AB and AC . The sides ab and ac are parallel to the chords of the arcs AB and

AC respectively. These stresses are equal, and their value is $- 2.563W$. The complete stress diagram is found to have a form similar to that of the wheel, except that the rim is composed of straight segments, and shows that the tension in all the spokes except *BC* is W , while the compression in all the segments of the rim is $2.563W$. The perimeter of the stress

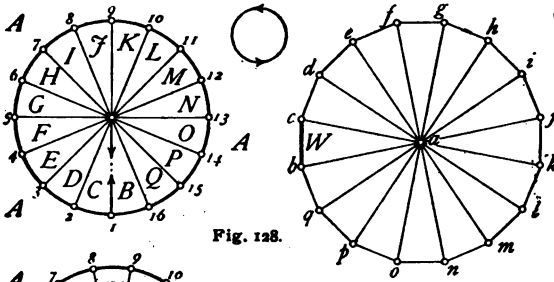


Fig. 128.

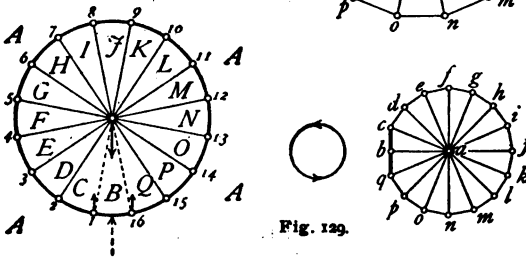


Fig. 129.

diagram expresses the condition of equilibrium at the hub between the load and the stresses in all the spokes.

The direct compression in any segment causes flexure, the fibers on its inner side being in compression, and those on the outside in tension. When the wheel rests on the ground at any intermediate points of a segment of the rim, the segment serves as a beam to transfer the reaction to the adjacent apexes or panel points of the wheel truss, the resulting flexure causing tension in the inner fibers and compression in the outer ones. Fig. 129 gives the position when the support is midway between the apexes 1 and 16. The direct stresses in the wheel members may therefore be found by replacing the reaction by the two upward forces at 1 and 16, each equal

to $\frac{1}{2}W$. The stress diagram is readily constructed, as both spokes QB and BC are not acting. The tension in the remaining spokes is $0.510W$, and the compression in all the segments of the rim except AB is $1.307W$, that in AB being $1.207W$.

It is seen, therefore, that in passing from the position in Fig. 128 to that in Fig. 129 the direct stresses in the entire rim and in all the spokes except two, are reduced nearly one-half, and during the next thirty-second of a revolution the stresses increase again to their former value. This cycle of changes occurs 16 times in every revolution for each segment of the rim and 14 times for the spokes. In addition to this the stress in each spoke changes from W to 0 and back again to W in passing from the position of QB to that of CD in Fig. 128. Further, the bending moment due to the reaction of the ground, as well as that due to the direct stress in each segment of the rim, passes through a similar cycle of changes 16 times in each revolution. The form of the stress diagram shows that if the number of spokes is doubled the direct stress in the rim segments is almost doubled, while the bending moment is reduced nearly 75 per cent. On the other hand, the magnitude of the stress in the spokes is independent of their number.

The changes in stress caused by attaching the spokes, in the customary manner, in series tangent to opposite sides of a hub of given diameter instead of radiating to its center, can readily be found by applying principles heretofore given.

Prob. 77. Find the stresses in a bicycle wheel with 32 spokes for both positions given in Figs. 128 and 129 when the load W is 150 pounds.

CHAPTER VII.

ELASTIC DEFORMATION OF TRUSSES.

ART. 66. THE DISPLACEMENT DIAGRAM.

The change in length λ of any member of a truss which is subject to given loads and reactions may be computed by the well-known formula (Mechanics of Materials, Art. 5)

$$\lambda = \frac{Pl}{AE},$$

in which l is the length of the given member, A the area of its cross-section, E the coefficient of elasticity of the material of which it is composed, and P the total stress in the member. In case stresses due to temperature are to be taken into account the above value of λ must be combined with the quantity $\alpha t l$, in which α is the coefficient of linear expansion for a change of one degree, and t the rise or fall of temperature expressed in degrees.

As a truss is composed of triangles, the method of finding the displacement of its panel points due to any given loads may be illustrated by showing how to determine the displacement of one panel point when two others with which it is connected by truss members are known. Let the panel point c in Fig. 130 be connected with a and b by members whose lengths are l_1 and l_2 respectively. Let the stress in ac be a compression which produces a shortening of λ_1 in its length, while the stress in bc is tension and λ_2 is the corresponding elongation. The magnitudes and directions of the displacements of a and b are represented by the lines aa' and bb' .

Let $a'c_1$ be drawn parallel and equal to ac . Since the stress in ac is compression, λ_1 must be laid off from c_1 towards the point a' , which for the moment is to be regarded as fixed. This shortening, indicated by a heavy full line, is very much exaggerated in the figure, for if it were laid off to the same scale as $a'c_1$, it would not be visible. With a' as a center and the reduced length $l_1 - \lambda_1$ as a radius let an arc be described.




Fig. 130.




Fig. 131.

The panel point c must lie somewhere on this arc. Because the elastic deformations of the truss members are, however, very small, the tangent to the arc may be substituted for the arc itself. A perpendicular to $a'c_1$ is therefore drawn at the end of the line marked λ_1 . Similarly, $b c_1$ is drawn parallel to bc , and its length increased by its elongation λ_2 , and a perpendicular erected at its extremity. The point c' is therefore at the intersection of these two perpendiculars, and the line cc' (not drawn) represents the displacement of c in magnitude and direction.

In view of the exceedingly small values of λ as compared with l it is desirable to exclude from the diagram that portion which contains the lines representing the lengths of the members themselves. This can readily be done, as it is seen that the lines cc_1 and cc_2 , representing the displacements of a and b , the lines λ_1 and λ_2 , and the perpendiculars at the extremities of λ_1 and λ_2 form a closed polygon. In Fig. 131 it is drawn separately to thrice the scale of that in Fig. 130, the pole O in the former replacing the point c in the latter. The dis-

placements of the panel points a , b , and c all radiate from the pole O .

Such a diagram is called a displacement diagram. In its construction especial care must be exercised in observing the directions in which the values of λ are to be laid off, constantly referring to the panel points of the truss diagram, which for the time being are considered as fixed. The lengths of the perpendiculars whose intersections locate the successive panel points need not be measured.

Prob. 78. A weight of 15 000 pounds is suspended from a ceiling at points 10 feet apart by means of two wrought-iron bars, one being one inch square and 9 feet long, and the other $3/4$ inch square and 10 feet long. Find the displacement of the point where the weight is attached to the bars.

ART. 67. DEFORMATION OF A TRUSS.

It is required to find the displacements of the panel points of a wooden king-post truss whose span is 16 feet and depth 8 feet, which carries a load of 12 000 pounds at panel point b (Fig. 132). The data required for the construction of the displacement diagram is given in the following table. In computing λ the value of E was assumed 1 500 000 pounds.

MEMBER.	STRESS.	LENGTH.	CROSS-SECTION.	λ	MEMBER.
	Pounds.	Inches.	Square Inches.	Inches.	Number.
$ab = bc$	+ 6 000	96	36	+ 0.0107	1 and 5
$aB = Bc$	- 8 490	135.75	64	- 0.0120	2 and 4
Bb	+ 12 000	96	36	+ 0.0213	3

For the sake of illustration let the point a be fixed, and the point c be regarded as perfectly free to move horizontally, although in practice such a short span is fixed at both supports, since the horizontal movement of c due to the load is too small to require a movable support.

The displacement diagram may be constructed by beginning at any panel point and regarding as fixed its own position as well as the direction of one member attached to it. Let the point a (which is actually fixed) and the direction of ab be so

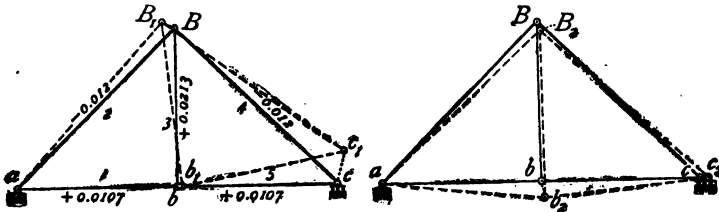


Fig. 132.

Fig. 133.

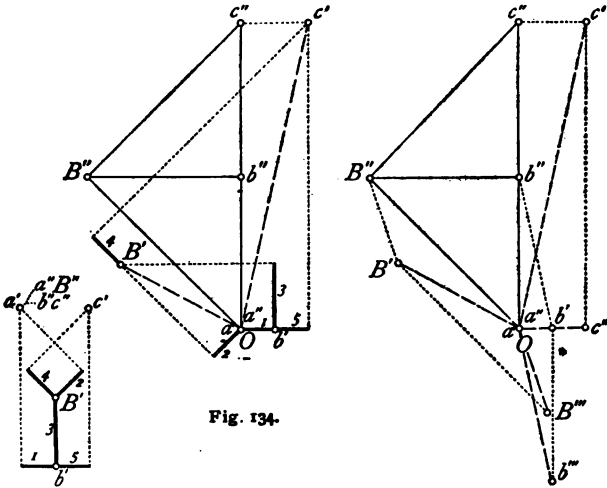


Fig. 134.

Fig. 135.

Fig. 136.

regarded. In Fig. 134 the point a' will therefore coincide with the pole O and λ_1 will be laid off toward the right, that is, in the direction of a toward b on the truss diagram. For convenience the values of λ are marked on the truss diagram, and when they are laid off in Fig. 134 they are marked by the same numbers as the corresponding members in Fig. 132. After b' is thus determined the displacement of B is next

found by regarding a and b in the triangle aBb as fixed. The elongation λ , is laid off upward from b' , and the shortening λ , downward from a' , the intersection of the perpendiculars giving B' . In the same way c' is located. The lines OB' and Oc' are the displacements of B and c .

In order to show the deformed truss under the conditions assumed (that a and the direction of ab are fixed), the displacements are laid off on Fig. 132 to one-tenth of the scale employed in Fig. 134, and the corresponding points joined by broken lines. The student will observe that the deformation shown is greatly exaggerated, and hence the members seen to have unduly altered their lengths.

The primary conditions of the problem, however, require that c shall move only in a horizontal line, and therefore the entire truss must be revolved about a as a center until c , falls into the horizontal through c . As the arc thus described is very small compared with the radius ac , which in turn differs but very little from ac , a perpendicular to ac from c , may be substituted for the arc without appreciable error.

In Fig. 135, to which were transferred the displacements OB' , OB' , and Oc' without the construction lines, the corresponding path of rotation of c is represented by $c'c'''$ which is drawn perpendicular to ac in Fig. 132, and continued until it meets the line Oc''' , which is drawn parallel to the direction in which the panel point c is free to move. In this example that direction is horizontal, and happens to coincide with the line ac , but the statement here given is so framed as to apply equally to inclined lines of motion of panel points supported by expansion rollers or rockers. When the successive displacements Oc' and $c'c'''$ are combined, the resultant displacement is Oc''' . The displacement of B due to the rotation of the truss is $B'B'''$, which is perpendicular to aB (in Fig. 132), and whose length is proportional to its distance from the center a . That is, $B'B''' : c'c''' = aB : ac$, from which the

length of $B'B'''$ may be conveniently found by similar triangles. Similarly, as ab equals one-half of ac , $b'b'''$ equals one-half of $c'c'''$. The resultant displacements are then represented in direction and magnitude by OB''' , Ob''' , and Oc''' , and as a is the center of rotation, a''' coincides with a' and Oa''' is zero.

In Fig. 133 the final position of the deformed truss is shown in broken lines, the resultant displacements BB_2 , bb_2 , and cc_2 , being laid off parallel to and equal to one-tenth of the lengths of OB''' , Ob''' , and Oc''' in Fig. 135. If the deformation were not exaggerated the truss diagram $aB_2c_2b_2$ in Fig. 133 would be equal to $aB_1c_1b_1$ in Fig. 132 in both form and dimensions.

For the purpose of simplifying the construction let the three parallelograms in Fig. 135 be completed, and the points a'' , B'' , c'' , and b'' joined by lines as indicated. The lines $B''a''$, $b''a''$, and $c''a''$ (parallel and equal to $B'B'''$, $b'b'''$, and $c'c'''$) represent the displacements of panel points B , b , and c due to rotation about a , and are respectively perpendicular and proportional to aB , ab , and ac of the truss diagram, and therefore it follows that the diagram $a''B''c''b''$ is similar to $aBcb$, and all of their lines are mutually perpendicular. This important fact furnishes a means of determining the final displacements on Fig. 134 in a very simple manner, as follows: Through c' draw $c'c''$ parallel to the constrained line of motion of the panel point c , and draw $a''c''$ perpendicular to ac (in Fig. 132), and intersecting $c'c''$ at c'' . On $a''c''$ draw a diagram similar to the truss diagram. The required displacements are then given by the directions and distances of the points B' , b' , and c' from B'' , b'' , and c'' respectively. It is thus seen that the points B'' , b'' , and c'' in Fig. 134 correspond to what may be regarded as successive positions of the shifted pole O in Fig. 135, which conception aids the memory in reading the directions correctly.

It is very desirable in practice to reduce the displacement diagrams to their most compact form. It will both diminish the errors due to slight inaccuracies in the directions of the intersecting perpendiculars as well as allow increased precision by the use of a larger scale. This result may be secured by beginning the construction with the line which suffers the minimum change in direction under the influence of the given loads. In simple trusses some line may be found at the middle which does not change its direction at all, provided the truss and the loading are both symmetrical with reference to a vertical section at the middle, or which changes but little in unsymmetrical trusses. For a bridge truss with an equal number of panels, the middle vertical is such a member, or the chords of the middle panel when the number of panels is odd. As an illustration of the effect thus produced, the displacement diagram for the above truss when the direction of the middle vertical and the position of either of its extremities is assumed to be fixed, is given in Fig. 136 to the same scale as that in Fig. 134. Since a perpendicular to ac through a' meets a horizontal through c' at a' , the diagram $a''B''c''b''$ is thereby reduced to zero. If the scale were doubled the vertical dimension of this diagram would not be quite equal to that of the one previously drawn. With a larger number of panels the difference is still greater. In this case the diagram makes a direct comparison between the displacements of all the panel points.

On applying the scale and protractor to the original drawing the displacement of B and b were found to be 0.0296 and 0.0501 inches, their directions being inclined $12\frac{1}{4}^\circ$ and $21\frac{1}{4}^\circ$ to the vertical. The angles were read only to the nearest quarter degree. As the lower chord is horizontal, the displacement of c is the sum of the elongations λ_1 and λ_2 which equals 0.0214 inch.

In order to avoid the excessive labor of making corrections

in the cross-sections of tension members to allow for the effect of rivet holes in riveted shapes or of mortices or other cuts in timber, it is customary to use the gross sectional areas and to reduce somewhat the coefficient of elasticity.

Prob. 79. A single-track through Pratt truss railroad bridge has 5 panels, each 23.1 feet long and 25 feet deep. Using the same notation as in Fig. 96 in Art. 45, the members have the following areas of cross-section in square inches: $BC = CD$, 27.99; $ab = bc$, 16.44; cd , 17.62; aB , 29.75; Bb , 11.58; Bc , 10.5; Cc , 11.58; $Cd = cD$, 8.04. The tie Bc and the chord cd are composed of eye-bars of medium steel, and the rest of the members are built up with soft steel shapes. Find the displacements of the panel points of the lower chord due to a live load of 4000 pounds per linear foot combined with two excess loads of 26 000 pounds two panel lengths apart. (Use values of E of 29 000 000 and 26 000 000 pounds for the medium and soft steel.)

ART. 68. DEFLECTION OF A TRUSS.

While the displacement diagram gives the actual displacements of the panel points in the plane of the truss, their vertical components only are generally required. When bridge trusses are erected they are cambered so that under their maximum load the panel points of the loaded chord shall not fall below a horizontal line joining the panel points at the supports. This camber is secured by shortening the tension members by an amount equal to the elastic elongation due to the sum of the live and dead load stresses, when the live load is so placed as to produce the maximum moment at the middle panel point, plus an allowance for clearance in the case of pin-connected joints. The compression members are lengthened in a similar way. (See Part III, Art. 62.) The maximum stresses must not be employed throughout because they are not simultaneous.

If to these changes of length for the members there be added the values of λ caused by the dead load only, due

regard being paid to their respective signs, and the corresponding displacement diagram be drawn, the vertical components of the displacements will give the deflections of the several panel points when the bridge supports only the dead load, and their values may be used for comparison with the observed deflections. Roof trusses supporting horizontal ceilings are cambered in a similar manner.

In the example used in the preceding article, the deflection of b is found to be 0.0489 and of B is 0.0276 inch. The diagram shows that when two points are directly above each other their deflections should differ by the change in length of the member connecting them. This may serve as a useful test of the accuracy of the drawing.

Prob. 80. Find the deflection due to the live load, of the bridge whose data is given in Prob. 79.

ART. 69. TRUSS DEFLECTION UNDER LOCOMOTIVE WHEEL LOADS.

The most convenient way to find the stresses in the truss members whether the chords are both horizontal, or either one or both of them are arched, is the following: Let the position of the live load be found which produces the maximum moment at the panel point at, or nearest to, the middle of the truss (Art. 47 or 51) and with the truss diagram in this position on the equilibrium polygon let the closing line be drawn as well as the chords of the polygon whose horizontal projections equal the successive panel lengths in magnitude and position. The extremities of these chords connect the points two and two where the verticals of the truss diagram intersect the equilibrium polygon. By drawing rays parallel to these chords through the pole they will cut off on the vertical load line the panel loads for this position of the wheel loads, and a ray parallel to the closing line will divide the

reactions. The stress diagram, which is similar to that for dead load, may now be completed in the usual manner.

The following table gives the required data for determining the deflection of the double-track through bridge No. 77 of the second division of the Baltimore and Ohio Railroad, due

MEMBERS.	STRESS.	LENGTH.	CROSS-SECTION.	A	MEMBER.
	1000 lbs.	Inches.	Square Inches.	Inches.	Number.
$ab = bc$	+ 287.0	321	36.0	+ 0.0882	11, 8
cd	+ 360.0	321	46.0	+ 0.0866	4
de	+ 356.0	321	46.0	+ 0.0856	14
$ef = fg$	+ 266.5	321	36.0	+ 0.0819	18, 21
BC	- 369.0	329	65.12	- 0.0717	6
$CD = DE$	- 414.0	321	71.52	- 0.0715	2, 12
EF	- 365.0	329	65.12	- 0.0709	16
aB	- 413.0	464.7	76.44	- 0.0966	10
Bb	+ 140.0	336	17.52	+ 0.1033	9
Bc	+ 106.0	464.7	23.56	+ 0.0804	7
Cc	+ 12.5	408	30.6	+ 0.0064	5
Cd	+ 87.5	519.1	34.0	+ 0.0514	3
Dd	0	408	20.6	0	1
dE	+ 94.5	519.1	34.0	+ 0.0555	13
Ee	+ 5.0	408	30.6	+ 0.0024	15
eF	+ 130.0	464.7	23.56	+ 0.0986	17
Ff	+ 106.0	336	17.52	+ 0.0782	19
fg	- 386.5	464.7	76.44	- 0.0903	20

to the specified live load of two B. & O. typical consolidation locomotives and train. The form of the truss is shown in Fig. 137. The lower chord consists of eye-bars of medium open-hearth steel, while the upper chord and web members are built up of shapes of soft steel. There are no counters. The stresses were found in the manner described above, the stress diagram being drawn to a scale of 50 000 pounds to the inch. The value of the coefficient of elasticity was assumed as 26 000 000 for soft and 29 000 000 pounds for the medium steel.

The displacement diagram, shown in reduced size in Fig. 138, was constructed by assuming the position of d and the direction of dD as fixed. As the elongation of this member is zero, it is the same condition as to assume that the position

of D and the direction of CD or DE are fixed: The truss members are numbered in the order in which their values of λ were used in constructing the diagram. As the left end of the truss is fixed and the right end rests on expansion rollers, a'' coincides with a' , and g'' lies in a horizontal through g'

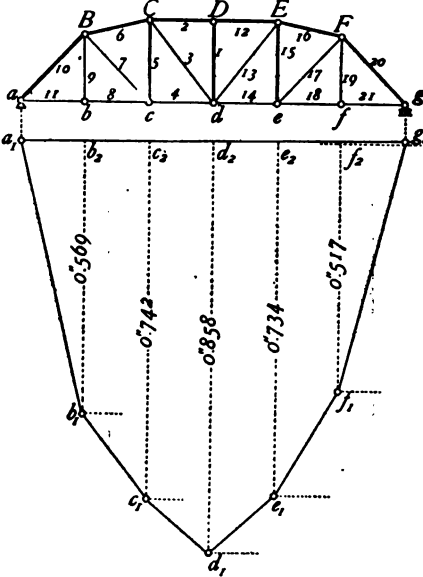


Fig. 137.

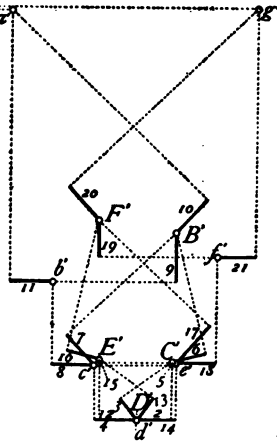



Fig. 138.

directly above a' . The distance $a''g''$ is too small a span to permit a diagram similar to the truss diagram to be drawn without confusion of points. As, however, only the deflections are desired, the necessity for this diagram may be obviated by the following construction of a deflection polygon.

Let a_1 be obtained by projecting a' across on the vertical through a , and similarly for g_1 . The intersection of the line joining a_1 and g_1 with any vertical, as for example that through c , gives a point c_1 whose height is the same as c'' would have been if the diagram $a'' \dots g''$ had been drawn. By projecting $b'c'd'e'$ and f' on the corresponding verticals and

joining them as indicated, a polygon will be obtained whose ordinates at the panel points represent the corresponding deflections of the panel points of the lower chord. The values of the deflections in inches are marked on the diagram. The scale of the original displacement diagram was 0.060 inch to an inch. A deflection polygon for the panel points of the upper chord might also be drawn, if desired; but as these points are united to the lower chord by verticals, their deflections may be obtained by subtracting the elongations of the verticals from the corresponding deflections marked on the diagram.

Prob. 81. What change in the deflection would be caused in the truss used in this article by substituting medium steel eye-bars for Bc and Cd with sectional areas of 24.0 and 20.25 square inches respectively?



APPENDIX.

ANSWERS TO PROBLEMS.

Prob. 1. 56.8 pounds, making an angle of $37^{\circ} 35'$ with the smaller force.

Prob. 2. 43.6 pounds, $36^{\circ} 35'$ and $83^{\circ} 25'$.

Prob. 4. 107.8 pounds and $129^{\circ} 20'$.

Prob. 5. 2 800 pounds.

Prob. 6. $S_1 = + 5.56$, $S_2 = - 3.27$, $S_3 = - 5.86$, and $S_4 = + 5.95$ tons.

Prob. 8. $S_1 = - 43.6$, $S_2 = S_3 = + 109.1$, and $S_4 = + 43.6$ pounds.

Prob. 9. Resultant = 279.7 pounds, and angle with greater force = $1^{\circ} 45'$.

Prob. 11. Resultant = 4 tons, is parallel to forces and 6 feet from greater force.

Prob. 12. 177.1 and 192.9 pounds.

Prob. 13. Maximum shear = $\pm 4\ 000$ pounds, maximum moment = $+ 20\ 000$ pounds-feet.

Prob. 15. Maximum shear = $- 6$ tons, maximum moment = $- 30$ tons-feet.

Prob. 16. Maximum shear = $- 6$ tons, maximum moment = $- 30$ tons-feet.

Prob. 17. 0.70 inches from the back of channel iron.

Prob. 18. 500 pounds, 15.27 feet from the first force.

Prob. 19. $I = A \times A' = 7.10 \times 10.81 = 76.75$ inches⁴, and $I' = A \times A'' = 7.10 \times 0.51 = 3.62$ inches⁴.

Prob. 22. Stress in $AC = BC = -2290$ pounds, and in $CD = +2050$ pounds.

Prob. 23. Apex loads = 1.48, 1.20 tons; reactions = 4.44, 3.60 tons.

Prob. 24. 2.79, 8.37, 2.04, and 6.12 tons.

Prob. 25. Apex loads = 2.15 and 1.61 tons. Dead load stresses are: in upper chord, $-12.03, -9.78, -10.10$; in lower chord, $+10.75, +6.45$; and in braces, $-2.30, -2.30, +4.29$ tons. The corresponding snow load stresses are, $-9.00, -7.32, -7.56; +8.05, +4.83; -1.72, -1.72, +3.21$ tons.

Prob. 27. $AB = 2035, BC = 2750$, and $CD = 814$ pounds, the normal wind pressures being 38.2 and 15.6 pounds per square foot.

Prob. 28. Apex load = 1.86 tons; reactions = 3.84 and 1.74 tons. Stresses in upper chord, $-5.82, -6.75, -5.36, -3.49, -3.49$; in lower chord, $+6.51, +4.43, +2.35, +2.35$; and in braces, $-2.08, +2.94, -3.12, +3.75, 0, 0, 0$, and 0 tons.

Prob. 32. Apex load = 2.05 tons; reactions at free end, 2.30 and 4.99 tons. Stresses for wind on fixed side are: in upper chord, $-8.93, -7.45, -5.98, -4.51, -5.04$; in lower chord, $+11.22, +8.98, +6.73, +4.48$; and in braces, $-2.52, +1.15, -3.21, +2.30, -4.11, +3.45$, and 0 tons. Lower chord stresses are diminished 3.75 tons for wind on free side.

Prob. 34. Dead apex loads = 0.70, 1.40, 1.40, etc.; snow apex loads = 0.43, 1.08, 1.30, etc.; and wind apex loads = 1.74, 2.35, and 0.70 tons. Maximum stresses in upper chord, $-11.0, -10.3, -8.7, -9.4$; in lower chord, $+9.4, +8.4, +6.4$; and in braces, $+1.9, +2.7, +1.7, +3.3$ tons. Minimum stresses, $-3.9, -3.3, -3.4, -4.0; -0.7, +0.8, +2.3; +1.0, -1.2, -0.2$, and -0.5 tons.

Prob. 36. Dead, snow, and wind apex loads are 0.91, 0.84, and 1.49 tons. Maximum stresses in upper chord, -14.45 ,

— 11.38, — 9.56; in lower chord, + 13.96, + 9.41; and in braces, — 3.82, + 2.06, — 3.21, + 3.44 tons. Minimum stresses, — 5.09, — 4.07, — 3.39; + 4.55, + 3.34; — 1.02, + 0.55, — 0.85, and + 1.21 tons.

Prob. 37. $cd = ce = -4.31$, $cg = ch = -1.73$, $ad = +3.91$, $bf = +1.26$, $bh = +1.57$, $de = 0$, $ef = +3.55$, $fg = +0.39$, and $gh = 0$ tons.

Prob. 38. Apex loads = 0.6, 1.2, and 0.6 tons. Designating the members as in Fig. 51, the stress $bf = -4.15$, $cg = -3.61$, $dk = dl = -2.06$, $ef = +3.76$, $eh = +1.50$, $el = +1.88$, $fg = -1.08$, $gh = +2.36$, $hk = +0.47$, and $kl = 0$ tons.

Prob. 39. Dead panel load per truss = 1.98, live = 4.70 tons.

Prob. 40. Panel loads = 2.83 on upper, and 5.67 tons on lower chord. Stresses in upper chord, — 39.4, — 47.3, — 47.3; in lower chord, + 23.6, + 23.6, + 39.4, + 47.3; and in web members, — 34.7, + 5.7, + 23.2, — 11.3, + 11.6, 0, and 0 tons.

Prob. 41. Maximum stresses in upper chord, — 46.6, — 123.3, — 169.2, — 184.5; in lower chord, + 92.0, + 153.3, + 183.9 tons. Minimum stresses, — 12.2, — 31.5, — 43.0, — 46.8; + 23.1, + 38.5, + 46.2.

Prob. 43. Panel load = 0.79 tons. Stresses in the chords, 3.4, 6.2, 8.4, 9.9, 10.9, 11.2; in diagonals, — 5.5, + 4.5, + 3.5, + 2.5, + 1.5, + 0.5; and in verticals, + 0.8, — 2.8, — 2.0, — 1.2, — 0.4, and 0 tons.

Prob. 44. Panel load due to truss is 1.074, and that due to train is 4.0 tons. Stresses in upper chord for south wind, 0, + 2.0; for north wind, — 2.0, — 2.7 tons. In the lower chord, 0, + 15.9, + 25.4; — 15.9, — 25.4, — 28.5 tons. Maximum wind stresses in diagonals of upper lateral system, + 2.6, + 0.9; in struts, — 1.6, — 1.1 tons. In lower lateral system, + 20.3, + 13.3, + 7.3; — 12.7, — 8.3, and — 5.1 tons.

Prob. 46. The greatest reduction of stress is in RC , and equals $4.7 \div 76.4 = 6.2$ per cent.

Prob. 47. Maximum stresses in upper chord, — 56.0, — 53.2,

— 52.1; in lower chord, + 50.0, + 50.0, + 51.3; in main ties, + 8.3, + 8.7; in counter ties, + 7.3, + 8.0; and in verticals, + 10.0, + 9.4, + 9.0 tons. Minimum stresses in chord, — 14.0, — 13.3, — 13.0, + 12.5, + 12.5, + 12.8; in diagonals, 0; and in verticals, + 2.5, + 0.2, — 0.3 tons.

Prob. 48. Maximum stresses in the chords, — 100.0, + 109.7, + 105.9, + 103.0, + 101.1, + 100.1; in main ties, + 9.0, + 10.2, + 10.9; in counters, + 7.7, + 9.0, + 10.2, and in verticals, — 10.0, — 12.4, — 14.2, — 15.2 tons. Minimum stresses in the chords, — 30.0, + 32.9, + 31.8, + 30.9, + 30.3, + 30.0; in diagonals, 0; and in verticals, — 3.0 tons.

Prob. 51. 42.5 tons.

Prob. 52. Dividing the span into eight equal parts, the flange stresses at the sections are 0.0, 16.0, 26.4, 32.6, and 35.1 tons. The absolute maximum is 35.2 tons at 4 inches from center of girder. The shears are 20.1, 16.3, 12.8, 9.4, and 6.1 tons.

Prob. 53. Maximum stresses in chords, 86.2, 138.1, 167.1; in end post, — 135.2; in main ties, + 95.4, + 60.1, + 28.0; in counter ties, + 3.5, + 28.0; and in verticals, + 40.8, — 48.3, and — 23.5 tons. Minimum stresses in the chords, 20.5, 34.2, 41.0; in end posts, — 32.2; in main ties, + 17.9, 0, 0; in counter ties, 0, 0; and in verticals, + 6.3, — 1.9, and — 1.9 tons.

INDEX.

- Abbreviated method for wind stress, 54
Absolute maximum flange stress, 117
Ambiguous stresses, 61, 194
Analysis of a plate girder, 114
 Pratt truss, 119
Apex loads, 36
Arithmetic, graphical, 30
Arrow, circular, 41

BALDWIN, W., 128, 174
Baltimore truss, 187
Bending moments, 17, 20
 scale of, 17
Bicycle wheel, 211
Bowstring truss, 91, 99
Braces, 33
Bridge trusses, 67-111

Camber, 221
Cantilever beams, 24
Center of gravity, 27
Character of stresses, 10, 11, 39
Chord increment, 73
 stresses, 153
Chords, 33
Circular arrow, 41
Composition of forces, 3, 4
Concentrated loads, 20
Counter braces, 77, 82, 93, 162, 203
 ties, 77, 87, 96, 123, 204
Crane truss, 9
Crescent truss, 59
Cycle of stresses, 162

Dead loads, 34, 67
Dead load stresses, 38, 69
Deepened beam, 198
Definitions, 33
Deflection of a truss, 221, 222
 polygon, 224
 under locomotive loads, 222
Deformation of trusses, 214-225, 216
Diagonals, maximum stresses, 80,
 82, 95, 157
 minimum stresses, 80,
 82, 95
Displacement diagram, 214, 217, 223
Double intersection truss, 193
 systems, 192

Elastic deformation of trusses, 214-225
Ends of trusses, 48, 50
Equilibrium, 3
 at each apex or joint, 10, 11
 between external forces, 38, 42
 conditions of, 7, 13
 forces in, 3, 5
 polygon, 12, 40, 102, 115, 117, 120, 124, 129, 145, 154, 167, 177, 190
Equilibrium polygon, properties of, 15
Excess loads, 107
External forces, 38, 42

- Ferris wheel, 208
 Fink truss, 61
 Floor beam, 120, 130
 reactions, 139
 Force polygon, 4, 152
 representation of a, 1
 triangle, 1
 Forces, composition of, 3, 4
 in equilibrium, 3, 5
 resolution of, 3, 4
 resultant of, 1, 2, 4
- Graphical arithmetic, 30
 Graphic method, advantages, 189
 GREINER, J. O., 196
 Greiner truss, 196
- Horizontal shear, 198
 Howe truss, 82, 139
- Inflection point, 25, 26
 Initial tension, 87
 Internal stresses, 38, 42
- Joints, 33
 equilibrium at, 10, 11
- Keys, 198
 Kingpost truss, 216, 221
- Lateral bracing, 84, 171, 189
 Lattice girder, 196
 Live loads, 68
 Live load stresses in Pratt truss, 77
 Warren truss, 73
- Load line, 20, 38, 115, 126
 Loads on bridge trusses, 67
 Locomotive loads, 112-143
 standard typical, 112
 WADDELL'S compromise standard, 113
- Maximum chord stresses, 153
 moment, 21, 25
 shears, 105, 109, 131
 stresses, 58, 61, 75, 80, 82, 89, 94, 122, 182, 206
 in diagonals, 157
 in verticals, 161
- Methods, 1-3^o, 54
 Minimum stresses, 58, 61, 75, 80, 82, 89, 94, 122, 182, 206
 in verticals, 163
- Miscellaneous trusses, 175-213
 Moment diagram, 21, 23, 25, 103, 130, 135, 198
 wheel load, 117, 124, 129
- Moment of inertia, 28
 Moments in plate girders, 124
 in trusses, 141, 155, 177, 183, 187, 190
 simultaneous, 135
- Normal wind pressure, 47
 Notation, 34, 152, 175
- Overhanging beams, 24
- Panel, 36
 loads, 37, 69
 effect of divided, 72
 point, 76
- Parabola, construction of, 23
 Parabolic bowstring truss, 99
 Pegram truss 175
 Petit truss, 182
 Plate girder, analysis, 114
 Points of division in panels, 144
 Pole, 14
 distance, 17
- Polygonal frame, 11
 Position of wheel loads, 147
 for maximum floor beam reactions, 139

- Position for maximum moments in
 plate girders, 125
 for maximum moments in
 trusses, 141, 143, 176, 183,
 187, 190, 195
 for maximum shears in
 plate girders, 132, 134
 for maximum shears in
 trusses, 137, 139
 for maximum web stresses
 in trusses, 137, 139, 147,
 164, 184, 187, 190, 195
- Posts, 146, 156, 175
- Pratt truss, 84, 88, 139
 analysis, 119
 live load stresses, 77
- Principles, 1-32, 33
- Purlins, 35
- Quadruple system, 192
- Rafters, 35, 44
- Range of stress, 58
- Rays, 14
- Reactions, determination of, 48, 54,
 58, 189
 effective, 37, 70
 floor beam, 139
 of beams, 18
- Reciprocal figures, 10
- Representation of forces, 1
- Resolution of forces, 3, 4
 of the shear, 151
- Resultant of forces, 1, 2, 4, 5, 13, 16,
 150, 166, 167
- Rise of truss, 33
- Roof trusses, 33-66
- Roof truss with counter braces, 203
- Shear diagram, 21, 23, 25, 105, 118,
 120, 134, 200
 division of area, 201
- Shears in plate girders, 131
 in trusses, 136
- Sheathing, 35
- Shingling, 35
- Simple beams, 20, 22
- Simultaneous moments, 135
- Snow loads, 34, 35
 load stresses, 83
- Span, 33
- Stress diagram, construction of, 9,
 39, 43, 45, 49, 50,
 52, 60, 61, 70, 75,
 79, 93, 204, 209,
 211
 defined, 10
- Stresses, determination of, 10, 11, 39
 due to track curvature, 174
- Stringers, 120, 130
- Strut, 34
- Subverticals, 182
- Suspender, 121
- Tabulation of web stresses, 75, 78,
 86, 95, 206, 207
- Tie, 34
- Train loads, 69
- Triangular roof truss, 44, 57
- Truss, defined, 33
 diagram, 10
 with fixed ends, 48
 with one end free, 50
- Trusses with broken chords, 144-174
- Typical locomotive, 112
- Uniform loads, 22
- Unsymmetrical loads, 64
 trusses, 64, 187
- Vertical shear, 21, 22, 25, 73, 142,
 151, 158
 sign of, 21, 143
- Verticals, maximum stresses, 81, 82,
 95, 161
 minimum stresses, 81, 82,
 95, 163
 relation of stresses to diag-
 onals, 81, 95-98, 146, 162
- Warren truss, 73, 139

- Warren truss, double system, 192
quadraple system, 196
- Web members, 33
- Weight of highway bridges, 67
railroad bridges, 67
roof covering, 35
roof trusses, 35
- Wheel loads, locomotive, 112-143,
147, 222
(See also Position of
wheel loads.)
- Whipple truss, 193
- Wind loads, 46
stresses, 48, 50, 54, 84, 171, 204

TEXT-BOOKS FOR ENGINEERING COLLEGES

PUBLISHED BY

JOHN WILEY & SONS,

53 East Tenth Street, New York.

ROOFS AND BRIDGES. By Professor Mansfield Merriman of Lehigh University and Professor Henry S. Jacoby of Cornell University. In 4 Parts, octavo, cloth.

PART I. STRESSES IN SIMPLE TRUSSES. Price \$2.50.

PART II. GRAPHIC STATICS. Price \$2.50.

PART III. BRIDGE DESIGN. Price \$5.00.

PART IV. CONTINUOUS, DRAW, CANTILEVER, SUSPENSION, AND ARCHED BRIDGES. (Ready in 1898.)

A TREATISE ON HYDRAULICS. By Professor Mansfield Merriman. Octavo, cloth, enlarged edition. Price \$4.00.

THE METHOD OF LEAST SQUARES. By Mansfield Merriman, Ph.D. Octavo, cloth. Price \$2.00.


INTRODUCTION TO GEODETIC SURVEYING. By Professor Mansfield Merriman. Octavo, cloth. Price \$2.00.

A HAND-BOOK FOR SURVEYORS. By Mansfield Merriman, Ph.D., and John P. Brooks, C.E. Duodecimo, morocco, pocket book form. Price \$2.00.

RETAINING WALLS AND MASONRY DAMS. By Mansfield Merriman, Professor of Civil Engineering in Lehigh University. Octavo, cloth. Price \$2.00.

THE MECHANICS OF MATERIALS AND OF BEAMS, COLUMNS, AND SHAFTS. By Professor Mansfield Merriman. Octavo, cloth, enlarged edition. Price \$4.00.

HIGHER MATHEMATICS. Edited by Professor Mansfield Merriman of Lehigh University and Professor Robert S. Woodward of Columbia College. Octavo, cloth. Price \$5.00.



SHORT-TITLE CATALOGUE

OF THE
PUBLICATIONS

OF
JOHN WILEY & SONS,

NEW YORK.

LONDON: CHAPMAN & HALL, LIMITED.

ARRANGED UNDER SUBJECTS.

Descriptive circulars sent on application.

Books marked with an asterisk are sold at *net* prices only.

All books are bound in cloth unless otherwise stated.

AGRICULTURE.

CATTLE FEEDING—DAIRY PRACTICE—DISEASES OF ANIMALS—
GARDENING, ETC.

Armsby's Manual of Cattle Feeding.....	12mo,	\$1 75
Downing's Fruit and Fruit Trees.....	8vo,	5 00
Grotenfelt's The Principles of Modern Dairy Practice, (Woll.)		
	12mo,	2 00
Kemp's Landscape Gardening....	12mo,	2 50
Lloyd's Science of Agriculture.....	8vo,	4 00
Loudon's Gardening for Ladies. (Downing.).....	12mo,	1 50
Steel's Treatise on the Diseases of the Dog.....	8vo,	3 50
" Treatise on the Diseases of the Ox.....	8vo,	6 00
Stockbridge's Rocks and Soils....	8vo,	2 50
Woll's Handbook for Farmers and Dairymen.....	12mo,	1 50

ARCHITECTURE.

BUILDING—CARPENTRY—STAIRS—VENTILATION, ETC.

Berg's Buildings and Structures of American Railroads....	4to,	7 50
Birkmire's American Theatres—Planning and Construction.	8vo,	3 00
" Architectural Iron and Steel.....	8vo,	3 50
Birkmire's Compound Riveted Girders.....	8vo,	2 00
" Skeleton Construction in Buildings.....	8vo,	3 00

Carpenter's Heating and Ventilating of Buildings.....	8vo,	\$3 00
Downing, Cottages.....	8vo,	2 50
and Wightwick's Hints to Architects	8vo,	2 00
Freitag's Architectural Engineering.....	8vo,	2 50
Gerhard's Sanitary House Inspection.....	16mo,	1 00
" Theatre Fires and Panics.....	12mo,	1 50
Hatfield's American House Carpenter.....	8vo,	5 00
Holly's Carpenter and Joiner..	18mo,	75
Kidder's Architect and Builder's Pocket-book.....	Morocco flap,	4 00
Merrill's Stones for Building and Decoration.....	8vo,	5 00
Monckton's Stair Building—Wood, Iron, and Stone.....	4to,	4 00
Stevens' House Painting.....	18mo,	75
Worcester's Small Hospitals—Establishment and Maintenance, including Atkinson's Suggestions for Hospital Archi- tecture... ..	12mo,	1 25
World's Columbian Exposition of 1893.....	4to,	2 50

ARMY, NAVY, Etc.

MILITARY ENGINEERING—ORDNANCE—PORT CHARGES, ETC.

Bourne's Screw Propellers.....	4to,	5 00
Bruff's Ordnance and Gunnery.....	8vo,	6 00
Bucknill's Submarine Mines and Torpedoes.....	8vo,	4 00
Chase's Screw Propellers.....	8vo,	3 00
Cooke's Naval Ordnance	8vo,	12 50
Cronkhite's Gunnery for Non-com. Officers.....	18mo, morocco,	2 00
De Brack's Cavalry Outpost Duties. (Carr.)....	18mo, morocco,	2 00
Dietz's Soldier's First Aid.....	12mo, morocco,	1 25
* Dredge's Modern French Artillery.....	4to, half morocco,	20 00
" Record of the Transportation Exhibits Building, World's Columbian Exposition of 1893..	4to, half morocco,	15 00
Dyer's Light Artillery.....	12mo,	3 00
Hoff's Naval Tactics.....	8vo,	1 50
Hunter's Port Charges.....	8vo, half morocco,	18 00
Ingalls's Ballistic Tables.....	8vo,	1 50
" Handbook of Problems in Direct Fire.....	8vo,	4 00
Mahan's Advanced Guard.....	18mo,	1 50
" Permanent Fortifications. (Mercur.)..	8vo, half morocco,	7 50

Mercur's Attack of Fortified Places.....	12mo,	\$2 00
' Elements of the Art of War.....	8vo,	4 00
Metcalf's Ordnance and Gunnery.....	12mo, with Atlas,	5 00
Phelps's Practical Marine Surveying.....	8vo,	2 50
Powell's Army Officer's Examiner.....	12mo,	4 00
Reed's Signal Service.....		50
Sharpe's Subsisting Armies.....	18mo, morocco,	1 50
Strauss and Alger's Naval Ordnance and Gunnery.....		
Todd and Whall's Practical Seamanship.....	8vo,	7 50
Very's Navies of the World.....	8vo, half morocco,	3 50
Wheeler's Siege Operations.....	8vo,	2 00
Winthrop's Abridgment of Military Law.....	12mo,	2 50
Woodhull's Notes on Military Hygiene.....	12mo, morocco,	2 50
Young's Simple Elements of Navigation..	12mo, morocco flaps,	2 50

ASSAYING.

SMELTING—ORE DRESSING—ALLOYS, ETC.

Fletcher's Quant. Assaying with the Blowpipe..	12mo, morocco,	1 50
Furman's Practical Assaying.....	8vo,	3 00
Kunhardt's Ore Dressing.....	8vo,	1 50
* Mitchell's Practical Assaying. (Crookes.).....	8vo,	10 00
O'Driscoll's Treatment of Gold Ores.....	8vo,	2 00
Ricketts and Miller's Notes on Assaying.....	8vo,	3 00
Thurston's Alloys, Brasses, and Bronzes.....	8vo,	2 50
Wilson's Cyanide Processes.....	12mo,	1 50

ASTRONOMY.

PRACTICAL, THEORETICAL, AND DESCRIPTIVE.

Craig's Azimuth.....	4to,	3 50
Doolittle's Practical Astronomy.....	8vo,	4 00
Gore's Elements of Geodesy.....	8vo,	2 50
Michie and Harlow's Practical Astronomy.....	8vo,	3 00
White's Theoretical and Descriptive Astronomy.....	12mo,	2 00

BOTANY.

GARDENING FOR LADIES, ETC.

Baldwin's Orchids of New England.....	8vo,	\$1 50
Loudon's Gardening for Ladies. (Downing.).....	12mo,	1 50

Thomé's Structural Botany.....	18mo,	\$2 25
Westermaler's General Botany. (Schneider.)	8vo,	2 00

BRIDGES, ROOFS, Etc.

CANTILEVER—DRAW—HIGHWAY—SUSPENSION.

(See also ENGINEERING, p. 6.)

Boller's Highway Bridges.....	8vo,	2 00
* " The Thames River Bridge.....	4to, paper,	5 00
Burr's Stresses in Bridges.....	8vo,	3 50
Crehore's Mechanics of the Girder.....	8vo,	5 00
Dredge's Thames Bridges.....	7 parts,	
Du Bois's Stresses in Framed Structures.....	4to,	10 00
Foster's Wooden Trestle Bridges.....	4to,	5 00
Greene's Arches in Wood, etc.....	8vo,	2 50
" Bridge Trusses.....	8vo,	2 50
" Roof Trusses.....	8vo,	1 25
Howe's Treatise on Arches	8vo,	
Johnson's Modern Framed Structures.....	4to,	10 00
Merriman & Jacoby's Text-book of Roofs and Bridges.		
Part I., Stresses.....	8vo,	2 50
Merriman & Jacoby's Text-book of Roofs and Bridges.		
Part II., Graphic Statics	8vo,	2 50
Merriman & Jacoby's Text-book of Roofs and Bridges.		
Part III., Bridge Design.....	8vo,	5 00
Merriman & Jacoby's Text-book of Roofs and Bridges.		
Part IV., Continuous, Draw, Cantilever, Suspension, and Arched Bridges.....	(In preparation).	
* Morison's The Memphis Bridge.....	Oblong 4to,	10 00
Waddell's Iron Highway Bridges.....	8vo,	4 00
Wood's Construction of Bridges and Roofs.....	8vo,	2 00
Wright's Designing of Draw Spans.....	8vo,	2 50

CHEMISTRY.

QUALITATIVE—QUANTITATIVE—ORGANIC—INORGANIC, ETC.

Adriance's Laboratory Calculations.....	12mo,	1 25
Allen's Tables for Iron Analysis.....	8vo,	3 00
Austen's Notes for Chemical Students.....	12mo,	1 50
Bolton's Student's Guide in Quantitative Analysis.....	8vo,	1 50

Classen's Analysis by Electrolysis. (Herrick).....	8vo,	\$3 00
Crafts's Qualitative Analysis. (Schaeffer).....	12mo,	1 50
Drechsel's Chemical Reactions. (Merrill).....	12mo,	1 25
Fresenius's Quantitative Chemical Analysis. (Allen).....	8vo,	6 00
" Qualitative Chemical Analysis. (Johnson).....	8vo,	4 00
Gill's Gas and Fuel Analysis.....	12mo,	1 25
Hammarsten's Physiological Chemistry. (Mandel).....	8vo,	4 00
Helm's Principles of Mathematical Chemistry. (Morgan).....	12mo,	1 50
Kolbe's Inorganic Chemistry.....	12mo,	1 50
Mandel's Bio-chemical Laboratory.....	12mo,	1 50
Mason's Water-supply.....	8vo,	5 00
Miller's Chemical Physics.....	8vo,	2 00
Mixter's Elementary Text-book of Chemistry.....	12mo,	1 50
Morgan's The Theory of Solutions and its Results.....	12mo,	1 00
Nichols's Water Supply (Chemical and Sanitary).....	8vo,	2 50
O'Brine's Laboratory Guide to Chemical Analysis.....	8vo,	2 00
Perkins's Qualitative Analysis.....	12mo,	1 00
Pinner's Organic Chemistry. (Austen).....	12mo,	1 50
Ricketts and Russell's Notes on Inorganic Chemistry (Non-metallic).....	Oblong 8vo, morocco,	75
Schimpf's Volumetric Analysis.....	12mo,	2 50
Spencer's Sugar Manufacturer's Handbook.....	12mo, morocco flaps,	2 00
Stockbridge's Rocks and Soils.....	8vo,	2 50
Trollius's Chemistry of Iron.....	8vo,	2 00
Wiechmann's Chemical Lecture Notes.....	12mo,	3 00
" Sugar Analysis.....	8vo,	2 50
Wulling's Inorganic Phar. and Med. Chemistry.....	12mo,	2 00

DRAWING.

ELEMENTARY—GEOMETRICAL—TOPOGRAPHICAL.

Hill's Shades and Shadows and Perspective.....	8vo,	2 00
MacCord's Descriptive Geometry.....	8vo,	3 00
" Kinematics.....	8vo,	5 00
" Mechanical Drawing.....	8vo,	4 00
Mahan's Industrial Drawing. (Thompson).....	2 vols., 8vo,	3 50
Reed's Topographical Drawing. (H. A.).....	4to,	5 00
Smith's Topographical Drawing. (Macmillan).....	8vo,	2 50
Warren's Descriptive Geometry.....	2 vols., 8vo,	3 50

Warren's Drafting Instruments.....	12mo,	1 25
“ Free-hand Drawing.....	12mo,	\$1 00
“ Higher Linear Perspective.....	8vo,	3 50
“ Linear Perspective.....	12mo,	1 00
“ Machine Construction.....	2 vols., 8vo,	7 50
“ Plane Problems.....	12mo,	1 25
“ Primary Geometry.....	12mo,	75
“ Problems and Theorems.....	8vo,	2 50
“ Projection Drawing.....	12mo,	1 50
“ Shades and Shadows.....	8vo,	3 00
“ Stereotomy—Stone Cutting.....	8vo,	2 50
Whelpley's Letter Engraving.....	12mo,	2 00

ELECTRICITY AND MAGNETISM.

ILLUMINATION—BATTERIES—PHYSICS.

Anthony and Brackett's Text-book of Physics (Magie). ...	8vo,	4 00
Barker's Deep-sea Soundings.....	8vo,	2 00
Benjamin's Voltaic Cell.....	8vo,	3 00
Cosmic Law of Thermal Repulsion.....	18mo,	75
Crehore and Squier's Experiments with a New Polarizing Photo- Chronograph.....	8vo,	3 00
* Dredge's Electric Illuminations... 2 vols., 4to, half morocco,		25 00
“ “ “ Vol. II.....	4to,	7 50
Gilbert's De magnete. (Mottelay.).....	8vo,	2 50
Holman's Precision of Measurements.....	8vo,	2 00
Michle's Wave Motion Relating to Sound and Light.....	8vo,	4 00
Morgan's, The Theory of Solutions and its Results.....	12mo,	
Niaudet's Electric Batteries. (Fishback.).....	12mo,	2 50
Reagan's Steam and Electrical Locomotives.....	12mo	2 00
Thurston's Stationary Steam Engines for Electric Lighting Pur- poses.....	12mo,	1 50
Tillman's Heat.....	8vo,	1 50

ENGINEERING.

CIVIL—MECHANICAL—SANITARY, ETC.

(See also BRIDGES, p. 4; HYDRAULICS, p. 8; MATERIALS OF EN-
GINEERING, p. 9; MECHANICS AND MACHINERY, p. 11; STEAM ENGINES
AND BOILERS, p. 14.)

Baker's Masonry Construction.....	8vo,	5 00
-----------------------------------	------	------

Baker's Surveying Instruments.....	12mo,	3 00
Black's U. S. Public Works.....	4to,	\$5 00
Butts's Engineer's Field-book.....	12mo, morocco,	2 50
Byrne's Highway Construction.....	8vo,	5 00
Carpenter's Experimental Engineering.....	8vo,	6 00
Church's Mechanics of Engineering—Solids and Fluids....	8vo,	6 00
" Notes and Examples in Mechanics.....	8vo,	2 00
Crandall's Earthwork Tables.....	8vo,	1 50
Crandall's The Transition Curve.....	12mo, morocco,	1 50
* Dredge's Penn. Railroad Construction, etc.	Folio, half mor.,	20 00
* Drinker's Tunnelling.....	4to, half morocco,	25 00
Eissler's Explosives—Nitroglycerine and Dynamite.....	8vo,	4 00
Gerhard's Sanitary House Inspection.....	16mo,	1 00
Godwin's Railroad Engineer's Field-book.....	12mo, pocket-bk. form,	2 50
Gore's Elements of Goodesy.....	8vo,	2 50
Howard's Transition Curve Field-book....	12mo, morocco flap,	1 50
Howe's Retaining Walls (New Edition.).....	12mo,	1 25
Hudson's Excavation Tables. Vol. II.....	8vo,	1 00
Hutton's Mechanical Engineering of Power Plants.....	8vo,	5 00
Johnson's Materials of Construction.....	8vo,	6 00
Johnson's Stadia Reduction Diagram..Sheet, 22½ × 28½ inches,		50
" Theory and Practice of Surveying.....	8vo,	4 00
Kent's Mechanical Engineer's Pocket-book....	12mo, morocco,	5 00
Kiersted's Sewage Disposal.....	12mo,	1 25
Kirkwood's Lead Pipe for Service Pipe.....	8vo,	1 50
Mahan's Civil Engineering. (Wood.).....	8vo,	5 00
Merriman and Brook's Handbook for Surveyors...	12mo, mor.,	2 00
Merriman's Geodetic Surveying.....	8vo,	2 00
" Retaining Walls and Masonry Dams.....	8vo,	2 00
Mosely's Mechanical Engineering. (Mahan.).....	8vo,	5 00
Nagle's Manual for Railroad Engineers.....	12mo, morocco,	
Patton's Civil Engineering.....	8vo,	7 50
" Foundations.....	8vo,	5 00
Rockwell's Roads and Pavements in France.....	12mo,	1 25
Ruffner's Non-tidal Rivers.....	8vo,	1 25
Searles's Field Engineering.....	12mo, morocco flaps,	3 00
Searles's Railroad Spiral.....	12mo, morocco flaps,	1 50

Siebert and Biggin's Modern Stone Cutting and Masonry...	8vo,	1 50
Smith's Cable Tramways.....	4to,	\$2 50
" Wire Manufacture and Uses.....	4to,	3 00
Spalding's Roads and Pavements.....	12mo,	2 00
" Hydraulic Cement.....	12mo,	
Thurston's Materials of Construction	8vo,	5 00
* Trautwine's Civil Engineer's Pocket-book...12mo, mor. flaps,		5 00
* " Cross-section.....	Sheet,	25
* " Excavations and Embankments.....	8vo,	2 00
* " Laying Out Curves.....	12mo, morocco,	2 50
Warren's Stereotomy—Stone Cutting.....	8vo,	2 50
Webb's Engineering Instruments.....	12mo, morocco,	1 00
Wegmann's Construction of Masonry Dams.....	4to,	5 00
Wellington's Location of Railways.....	8vo,	5 00
Wheeler's Civil Engineering.....	8vo,	4 00
Wolf's Windmill as a Prime Mover.....	8vo,	3 00

HYDRAULICS.

WATER-WHEELS—WINDMILLS—SERVICE PIPE—DRAINAGE, ETC.

(See also ENGINEERING, p. 6.)

Bazin's Experiments upon the Contraction of the Liquid Vein (Trautwine).....	8vo,	2 00
Bovey's Treatise on Hydraulics.....	8vo,	4 00
Coffin's Graphical Solution of Hydraulic Problems 12mo, mor.,		2 50
Ferrel's Treatise on the Winds, Cyclones, and Tornadoes...8vo,		4 00
Ganguillet & Kutter's Flow of Water. (Hering & Trautwine) 8vo,		4 00
Hazen's Filtration of Public Water Supply.....	8vo,	2 00
Kiersted's Sewage Disposal.....	12mo,	1 25
Kirkwood's Lead Pipe for Service Pipe.....	8vo,	1 50
Mason's Water Supply.....	8vo,	5 00
Merriman's Treatise on Hydraulics.....	8vo,	4 00
Nichols's Water Supply (Chemical and Sanitary).....	8vo,	2 50
Ruffner's Improvement for Non-tidal Rivers.....	8vo,	1 25
Wegmann's Water Supply of the City of New York.....	4to,	10 00
Weisbach's Hydraulics. (Du Bois).....	8vo,	5 00
Wilson's Irrigation Engineering.....	8vo,	4 00
Wolf's Windmill as a Prime Mover.....	8vo,	3 00
Wood's Theory of Turbines.....	8vo,	2 50

MANUFACTURES.

ANILINE—BOILERS—EXPLOSIVES—IRON—SUGAR—WATCHES— WOOLLENS, ETC.

Allen's Tables for Iron Analysis.....8vo,	\$3 00
Beaumont's Woollen and Worsted Manufacture.....12mo,	1 50
Bolland's Encyclopædia of Founding Terms.... 12mo,	3 00
" The Iron Founder.....12mo,	2 50
" " " " Supplement.....12mo,	2 50
Booth's Clock and Watch Maker's Manual.....12mo,	2 00
Bouvier's Handbook on Oil Painting.....12mo,	2 00
Eisler's Explosives, Nitroglycerine and Dynamite.....8vo,	4 00
Ford's Boiler Making for Boiler Makers.....18mo,	1 00
Metcalf's Cost of Manufactures.....8vo,	5 00
Metcalf's Steel—A Manual for Steel Users.....12mo,	2 00
Reimann's Aniline Colors. (Crookes.).....8vo,	2 50
* Reisig's Guide to Piece Dyeing.....8vo,	25 00
Spencer's Sugar Manufacturer's Handbook...12mo, mor. flap,	2 00
Svedelius's Handbook for Charcoal Burners.....12mo,	1 50
The Lathe and Its Uses..... 8vo,	6 00
Thurston's Manual of Steam Boilers..... 8vo,	5 00
West's American Foundry Practice.....12mo,	2 50
" Moulder's Text-book.....12mo,	2 50
Wiechmann's Sugar Analysis.....8vo,	2 50
Woodbury's Fire Protection of Mills.....8vo,	2 50

MATERIALS OF ENGINEERING.

STRENGTH—ELASTICITY—RESISTANCE, ETC.

(See also ENGINEERING, p. 6.)

Baker's Masonry Construction.....8vo,	5 00
Beardslee and Kent's Strength of Wrought Iron.....8vo,	1 50
Bovey's Strength of Materials.....8vo,	7 50
Burr's Elasticity and Resistance of Materials.....8vo,	5 00
Byrne's Highway Construction.....8vo,	5 00
Carpenter's Testing Machines and Methods of Testing Materials	
Church's Mechanic's of Engineering—Solids and Fluids....8vo,	6 00
Du Bois's Stresses in Framed Structures.....4to,	10 00
Hatfield's Transverse Strains.....8vo,	5 00
Johnson's Materials of Construction.....8vo,	6 00

Lanza's Applied Mechanics.....	8vo,	\$7 50
" Strength of Wooden Columns.....	8vo, paper,	50
Merrill's Stones for Building and Decoration.....	8vo,	5 00
Merriman's Mechanics of Materials.....	8vo,	4 00
Patton's Treatise on Foundations.....	8vo,	5 00
Rockwell's Roads and Pavements in France.....	12mo,	1 25
Spalding's Roads and Pavements.....	12mo,	2 00
" Hydraulic Cement.....	12mo,	2 00
Thurston's Materials of Construction.....	8vo,	5 00
Thurston's Materials of Engineering.....	3 vols., 8vo,	8 00
Vol. I., Non-metallic.....	8vo,	2 00
Vol. II., Iron and Steel.....	8vo,	3 50
Vol. III., Alloys, Brasses, and Bronzes.....	8vo,	2 50
Weyrauch's Strength of Iron and Steel. (Du Bois.).....	8vo,	1 50
Wood's Resistance of Materials.....	8vo,	2 00

MATHEMATICS.

CALCULUS—GEOMETRY—TRIGONOMETRY, ETC.

Baker's Elliptic Functions.....	8vo,	1 50
Ballard's Pyramid Problem.....	8vo,	1 50
Barnard's Pyramid Problem.....	8vo,	1 50
Bass's Differential Calculus.....	12mo,	4 00
Brigg's Plane Analytical Geometry.....	12mo,	1 00
Chapman's Theory of Equations.....	12mo,	1 50
Chessin's Elements of the Theory of Functions.....		
Compton's Logarithmic Computations.....	12mo,	1 50
Craig's Linear Differential Equations.....	8vo,	5 00
Davis's Introduction to the Logic of Algebra.....	8vo,	1 50
Halsted's Elements of Geometry.....	8vo,	1 75
" Synthetic Geometry.....	8vo,	1 50
Johnson's Curve Tracing.....	12mo,	1 00
" Differential Equations—Ordinary and Partial.....	8vo,	3 50
" Integral Calculus.....	12mo,	1 50
" Least Squares.....	12mo,	1 50
Ludlow's Logarithmic and Other Tables. (Bass.).....	8vo,	2 00
" Trigonometry with Tables. (Bass.).....	8vo,	3 00
Mahan's Descriptive Geometry (Stone Cutting).....	8vo,	1 50
Merriman and Woodward's Higher Mathematics.....	8vo,	5 00
Merriman's Method of Least Squares.....	8vo,	2 00

Parker's Quadrature of the Circle	8vo,	\$2 50
Rice and Johnson's Differential and Integral Calculus,		
	2 vols. in 1, 12mo,	2 50
" Differential Calculus.....	8vo,	8 50
" Abridgment of Differential Calculus....	8vo,	1 50
Searles's Elements of Geometry.	8vo,	1 50
Totten's Metrology.....	8vo,	2 50
Warren's Descriptive Geometry.....	2 vols., 8vo,	8 50
" Drafting Instruments.....	12mo,	1 25
" Free-hand Drawing.....	12mo,	1 00
" Higher Linear Perspective.....	8vo,	8 50
" Linear Perspective.....	12mo,	1 00
" Primary Geometry.....	12mo,	75
" Plane Problems.....	12mo,	1 25
" Plane Problems.....	12mo,	1 25
" Problems and Theorems.....	8vo,	2 50
" Projection Drawing.....	12mo,	1 50
Wood's Co-ordinate Geometry.....	8vo,	2 00
" Trigonometry.....	12mo,	1 00
Woolf's Descriptive Geometry.....	Royal 8vo,	8 00

MECHANICS—MACHINERY.

TEXT-BOOKS AND PRACTICAL WORKS.

(See also ENGINEERING, p. 6.)

Baldwin's Steam Heating for Buildings.....	12mo,	2 50
Benjamin's Wrinkles and Recipes.....	12mo,	2 00
Carpenter's Testing Machines and Methods of Testing		
Materials.....	8vo,	
Chordal's Letters to Mechanics.....	12mo,	2 00
Church's Mechanics of Engineering....	8vo,	6 00
" Notes and Examples in Mechanics.....	8vo,	2 00
Crehore's Mechanics of the Girder.....	8vo,	5 00
Cromwell's Belts and Pulleys.....	12mo,	1 50
" Toothed Gearing.....	12mo,	1 50
Compton's First Lessons in Metal Working.....	12mo,	1 50
Dana's Elementary Mechanics.....	12mo,	1 50
Dingey's Machinery Pattern Making.....	12mo,	2 00

Dredge's Trans. Exhibits Building, World Exposition,	4to, half morocco,	\$15 00
Du Bois's Mechanics. Vol. I., Kinematics	8vo,	3 50
" " Vol. II., Statics..	8vo,	4 00
" " Vol. III., Kinetics.....	8vo,	3 50
Fitzgerald's Boston Machinist.....	18mo,	1 00
Flather's Dynamometers.....	12mo,	2 00
" Rope Driving.....	12mo,	2 00
Hall's Car Lubrication.....	12mo,	1 00
Holly's Saw Filing	18mo,	75
Lanza's Applied Mechanics	8vo,	7 50
MacCord's Kinematics	8vo,	5 00
Merriman's Mechanics of Materials.....	8vo,	4 00
Metcalf's Cost of Manufactures.....	8vo,	5 00
Michie's Analytical Mechanics.....	8vo,	4 00
Mosely's Mechanical Engineering. (Mahan.).....	8vo,	5 00
Richards's Compressed Air.....	12mo,	1 50
Robinson's Principles of Mechanism.....	8vo,	3 00
Smith's Press-working of Metals.....	8vo,	3 00
The Lathe and Its Uses.....	8vo,	6 00
Thurston's Friction and Lost Work.....	8vo,	3 00
" The Animal as a Machine.....	12mo,	1 00
Warren's Machine Construction.....	2 vols., 8vo,	7 50
Weisbach's Hydraulics and Hydraulic Motors. (Du Bois.)..	8vo,	5 00
" Mechanics of Engineering. Vol. III., Part I.,		
Sec. I. (Klein.).....	8vo,	5 00
Weisbach's Mechanics of Engineering. Vol. III., Part I.,		
Sec. II. (Klein.).....	8vo,	5 00
Weisbach's Steam Engines. (Du Bois.).....	8vo,	5 00
Wood's Analytical Mechanics.....	8vo,	3 00
" Elementary Mechanics.....	12mc,	1 25
" " " Supplement and Key.....		1 25

METALLURGY.

IRON—GOLD—SILVER—ALLOYS, ETC.

Allen's Tables for Iron Analysis.....	8vo,	8 00
Egleston's Gold and Mercury.....	8vo,	7 50

Egleston's Metallurgy of Silver.....	8vo,	\$7 50
* Kerl's Metallurgy—Copper and Iron.....	8vo,	15 00
* " " Steel, Fuel, etc.....	8vo,	15 00
Kunhardt's Ore Dressing in Europe.....	8vo,	1 50
Metcalf Steel—A Manual for Steel Users... ..	12mo,	2 00
O'Driscoll's Treatment of Gold Ores.....	8vo,	2 00
Thurston's Iron and Steel.....	8vo,	3 50
" Alloys.....	8vo,	2 50
Wilson's Cyanide Processes.....	12mo,	1 50

MINERALOGY AND MINING.

MINE ACCIDENTS—VENTILATION—ORE DRESSING, ETC.

Beard's Ventilation of Mines.....	12mo,	2 50
Boyd's Resources of South Western Virginia.....	8vo,	3 00
" Map of South Western Virginia....	Pocket-book form,	2 00
Brush and Penfield's Determinative Mineralogy.. ..	8vo,	3 50
Chester's Catalogue of Minerals.....	8vo,	1 25
" Dictionary of the Names of Minerals.....	8vo,	3 00
Dana's American Localities of Minerals.....	8vo,	1 00
" Descriptive Mineralogy. (E. S.)... ..	8vo, half morocco,	12 50
" Mineralogy and Petrography. (J. D.).....	12mo,	2 00
" Minerals and How to Study Them. (E. S.).....	12mo,	1 50
" Text-book of Mineralogy. (E. S.).....	8vo,	3 50
*Drinker's Tunnelling, Explosives, Compounds, and Rock Drills.	4to, half morocco,	25 00
Egleston's Catalogue of Minerals and Synonyms.....	8vo,	2 50
Eissler's Explosives—Nitroglycerine and Dynamite.	8vo,	4 00
Goodyear's Coal Mines of the Western Coast.....	12mo,	2 50
Hussak's Rock-forming Minerals. (Smith.).....	8vo,	2 00
Ihlseng's Manual of Mining.. ..	8vo,	4 00
Kunhardt's Ore Dressing in Europe.....	8vo,	1 50
O'Driscoll's Treatment of Gold Ores.....	8vo,	2 00
Rosenbusch's Microscopical Physiography of Minerals and Rocks. (Iddings.).....	8vo,	5 00
Sawyer's Accidents in Mines.....	8vo,	7 00
Stockbridge's Rocks and Soils.....	8vo,	2 50

Williams's Lithology.....	.8vo,	\$3 00
Wilson's Mine Ventilation.....	16mo,	1 25

STEAM AND ELECTRICAL ENGINES, BOILERS, Etc.

STATIONARY—MARINE—LOCOMOTIVE—GAS ENGINES, ETC.

(See also ENGINEERING, p. 6.)

Baldwin's Steam Heating for Buildings.....	12mo,	2 50
Clerk's Gas Engine.....	12mo,	4 00
Ford's Boiler Making for Boiler Makers.....	18mo,	1 00
Hemenway's Indicator Practice.....	12mo,	2 00
Hoadley's Warm-blast Furnace.....	.8vo,	1 50
Kneass's Practice and Theory of the Injector.....	.8vo,	1 50
MacCord's Slide Valve.....	.8vo,	
* Maw's Marine Engines.....	Folio, half morocco,	18 00
Meyer's Modern Locomotive Construction.....	4to,	10 00
Peabody and Miller's Steam Boilers.....	.8vo,	
Peabody's Tables of Saturated Steam.....	.8vo,	1 00
" Thermodynamics of the Steam Engine.....	.8vo,	5 00
" Valve Gears for the Steam-Engine.....	.8vo,	2 50
Pray's Twenty Years with the Indicator.....	Royal 8vo,	2 50
Pupin and Osterberg's Thermodynamics.....	12mo,	1 25
Reagan's Steam and Electrical Locomotives.....	12mo,	2 00
Röntgen's Thermodynamics. (Du Bois.).....	.8vo,	5 00
Sinclair's Locomotive Running.....	12mo,	2 00
Thurston's Boiler Explosion.....	12mo,	1 50
" Engine and Boiler Trials.....	.8vo,	5 00
" Manual of the Steam Engine. Part I., Structure and Theory.....	.8vo,	7 50
" Manual of the Steam Engine. Part II., Design, Construction, and Operation.....	.8vo,	7 50
	2 parts,	12 00
" Philosophy of the Steam Engine.....	12mo,	75
" Reflection on the Motive Power of Heat. (Carnot.)	12mo,	2 00
" Stationary Steam Engines.....	12mo,	1 50
" Steam-boiler Construction and Operation.....	.8vo,	5 00

Spangler's Valve Gears.....	8vo,	\$2 50
Trowbridge's Stationary Steam Engines.....	4to, boards,	2 50
Weisbach's Steam Engine. (Du Bois).....	8vo,	5 00
Whitham's Constructive Steam Engineering.....	8vo,	10 00
" Steam-engine Design.....	8vo,	6 00
Wilson's Steam Boilers. (Flather).....	12mo,	2 50
Wood's Thermodynamics, Heat Motors, etc.....	8vo,	4 00

TABLES, WEIGHTS, AND MEASURES.

FOR ACTUARIES, CHEMISTS, ENGINEERS, MECHANICS—METRIC TABLES, ETC.

Adriance's Laboratory Calculations.....	12mo,	1 25
Allen's Tables for Iron Analysis.....	8vo,	3 00
Bixby's Graphical Computing Tables.....	Sheet,	25
Compton's Logarithms.....	12mo,	1 50
Crandall's Railway and Earthwork Tables.....	8vo,	1 50
Egleston's Weights and Measures.....	18mo,	75
Fisher's Table of Cubic Yards.....	Cardboard,	25
Hudson's Excavation Tables. Vol. II.....	8vo,	1 00
Johnson's Stadia and Earthwork Tables.....	8vo,	1 25
Ludlow's Logarithmic and Other Tables. (Bass.).....	12mo,	2 00
Thurston's Conversion Tables.....	8vo,	1 00
Totten's Metrology.....	8vo,	2 50

VENTILATION.

STEAM HEATING—HOUSE INSPECTION—MINE VENTILATION.

Baldwin's Steam Heating.....	12mo,	2 50
Beard's Ventilation of Mines.....	12mo,	2 50
Carpenter's Heating and Ventilating of Buildings.....	8vo,	3 00
Gerhard's Sanitary House Inspection.....	Square 16mo,	1 00
Mott's The Air We Breathe, and Ventilation.....	16mo,	1 00
Reid's Ventilation of American Dwellings.....	12mo,	1 50
Wilson's Mine Ventilation.....	16mo,	1 25

MISCELLANEOUS PUBLICATIONS.

Alcott's Gems, Sentiment, Language.....	Gilt edges,	5 00
Bailey's The New Tale of a Tub.....	8vo,	75

Ballard's Solution of the Pyramid Problem.....	8vo,	\$1 50
Barnard's The Metrological System of the Great Pyramid..	8vo,	1 50
Emmon's Geological Guide-book of the Rocky Mountains..	8vo,	1 50
Ferrel's Treatise on the Winds.....	8vo,	4 00
Mott's The Fallacy of the Present Theory of Sound..	Sq. 16mo,	1 00
Perkins's Cornell University.....	Oblong 4to,	1 50
Ricketts's History of Rensselaer Polytechnic Institute....	8vo,	8 00
Rotherham's The New Testament Critically Emphathized.		
	12mo,	1 50
Totten's An Important Question in Metrology.....	8vo,	2 50
Whitehouse's Lake Moeris.....	Paper,	25
* Wiley's Yosemite, Alaska, and Yellowstone	4to,	8 00


HEBREW AND CHALDEE TEXT-BOOKS.


FOR SCHOOLS AND THEOLOGICAL SEMINARIES.


Gesenius's Hebrew and Chaldee Lexicon to Old Testament. (Tregelles.).....	Small 4to, half morocco,	5 00
Green's Elementary Hebrew Grammar... ..	12mo,	1 25
“ Grammar of the Hebrew Language (New Edition)..	8vo,	3 00
“ Hebrew Chrestomathy.....	8vo,	2 00
Letteris's Hebrew Bible (Massoretic Notes in English).		
	8vo, arabesque,	2 25
Luzzato's Grammar of the Biblical Chaldaic Language and the Talmud Babli Idioms.....	12mo,	1 50


MEDICAL.


Bull's Maternal Management in Health and Disease.....	12mo,	1 00
Hammarsten's Physiological Chemistry. (Mandel.).....	8vo,	4 00
Mott's Composition, Digestibility, and Nutritive Value of Food.		
	Large mounted chart,	1 25
Steel's Treatise on the Diseases of the Ox....	8vo,	6 00
“ Treatise on the Diseases of the Dog:.....	8vo,	3 50
Worcester's Small Hospitals—Establishment and Maintenance, including Atkinson's Suggestions for Hospital Archi- tecture.....	12mo,	1 25





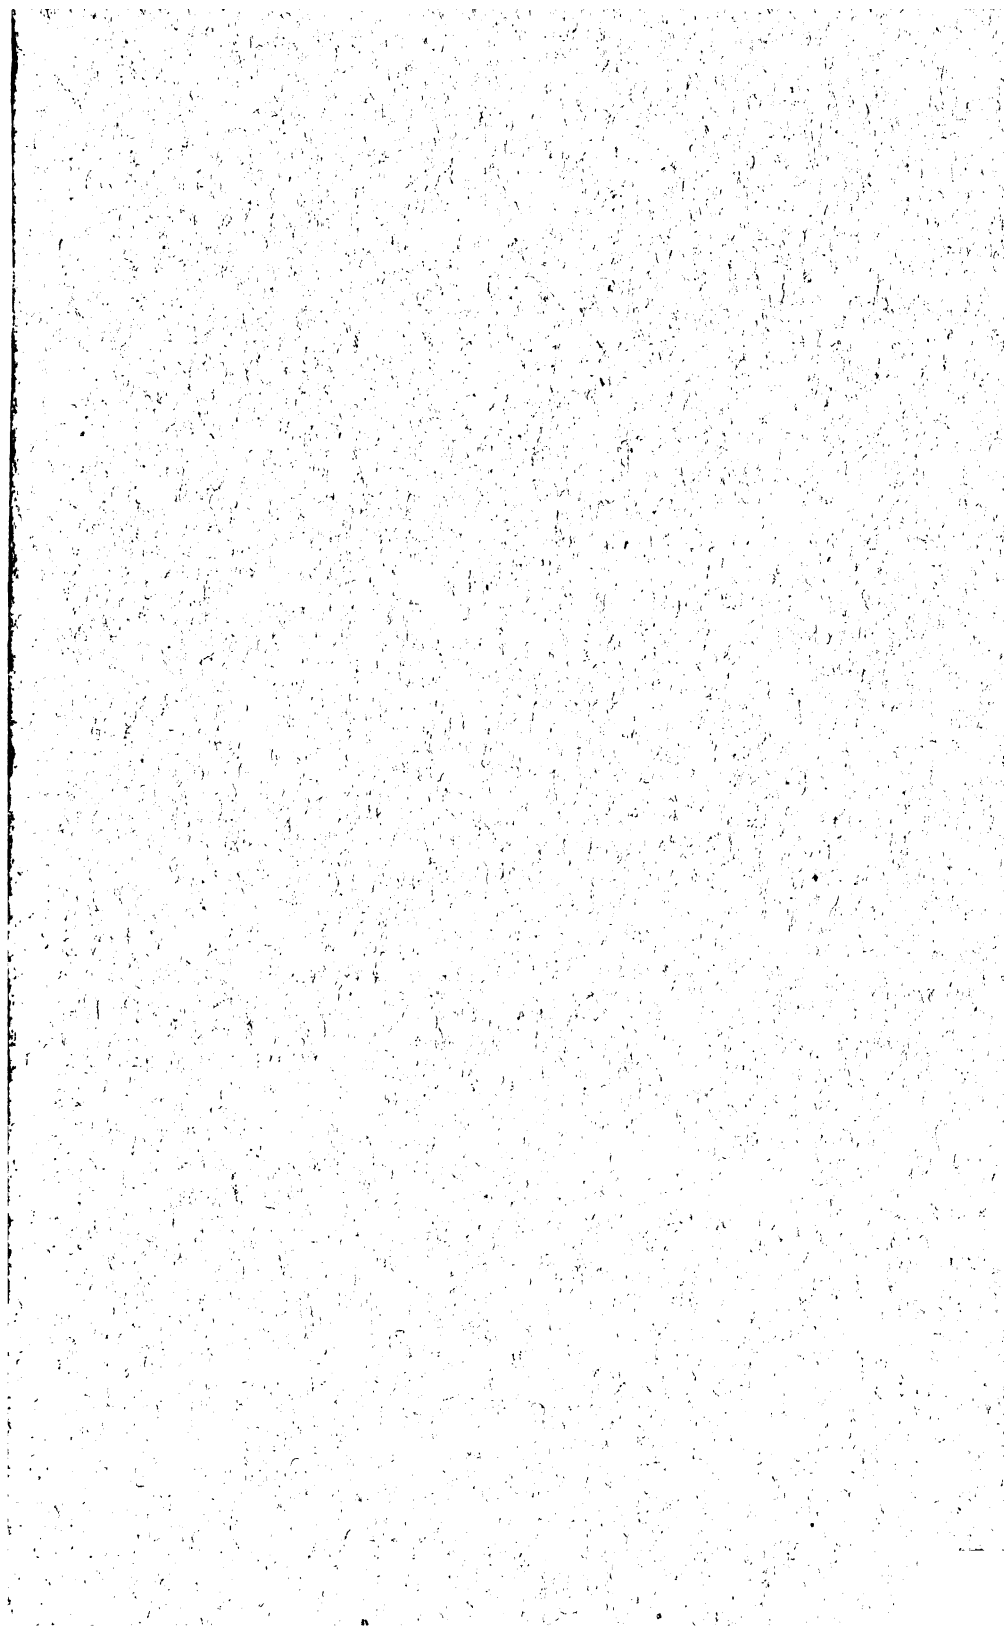

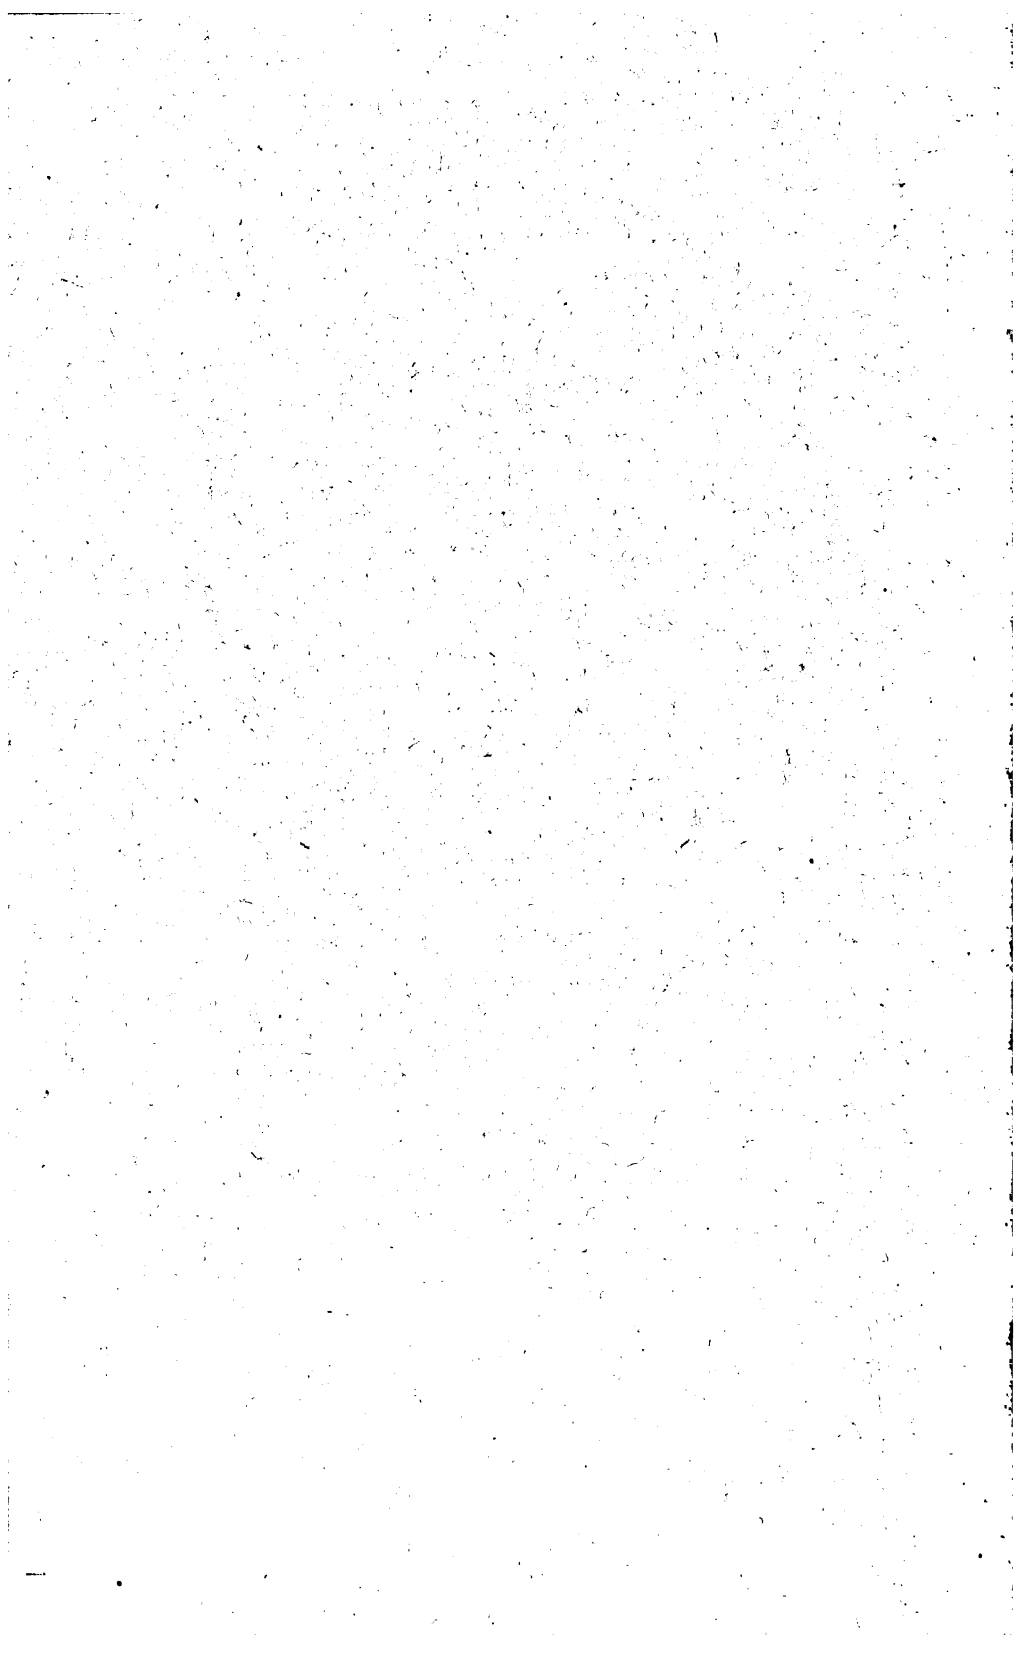


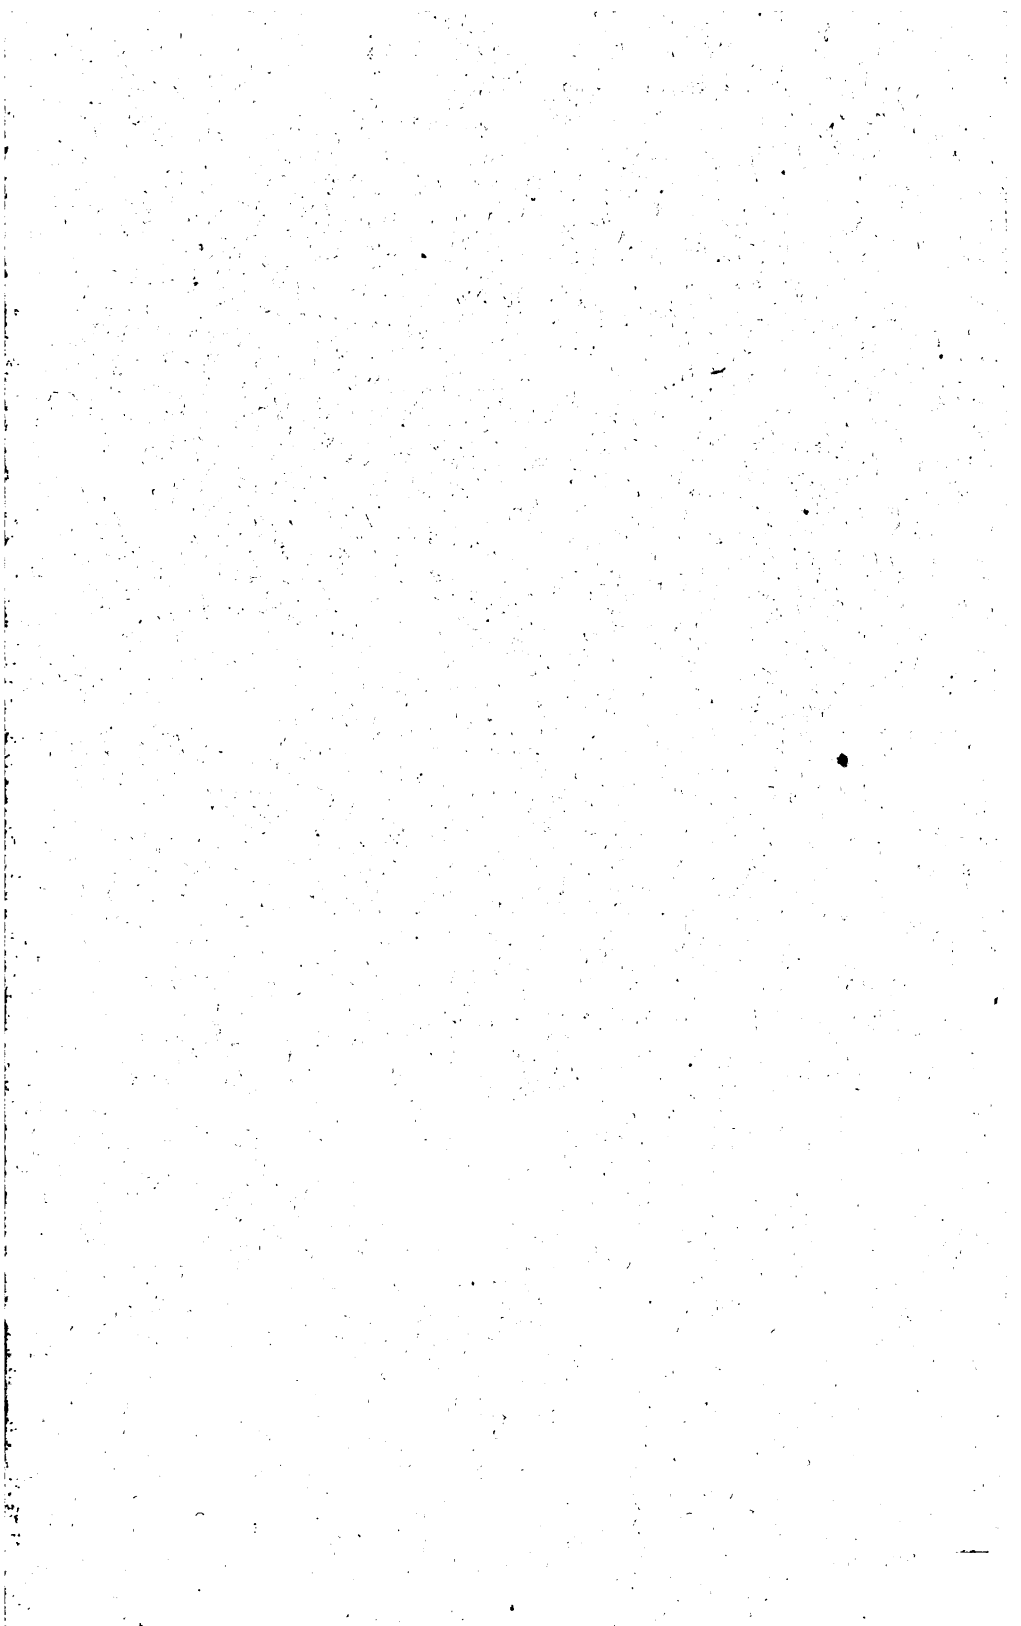

89078556347



B89078556347A

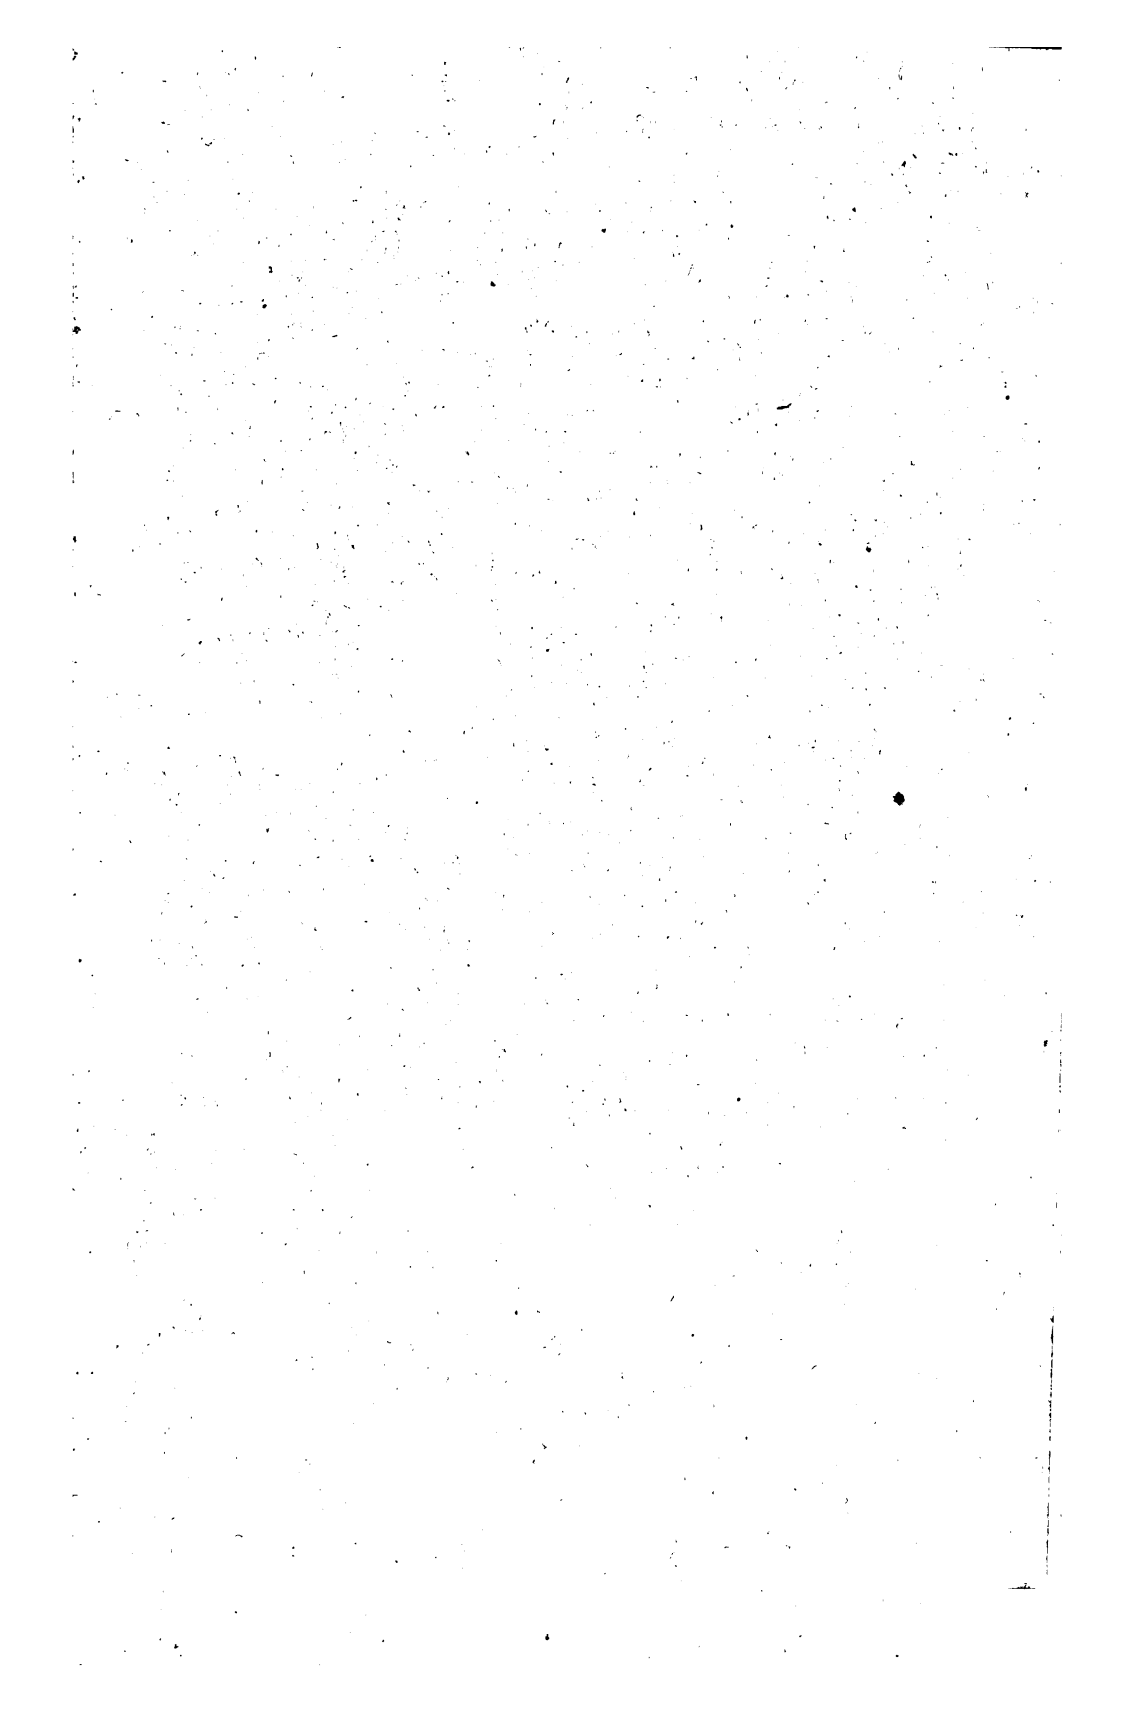

89078556347



B89078556347A

